

4

3

2

1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	D2	ECR-18-019978		12-DEC-18	TB	GB	

REPLACED BY OCEAN STYLE APPLICATOR PART NUMBER 2150957-2

FOR REPLACEMENT PARTS FOR APPLICATOR 466122-3
 REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
 WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
 SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
 466122-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	GOPALAKRISHNA HV		 TE Connectivity
DIMENSIONS:		CHK	GOPALAKRISHNA HV		
		APVD		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		STOUGH DALE		MINIATURE QUICK CHANGE APPLICATOR, END FEED(.109 DIA PIN)	
MATERIAL		PRODUCT SPEC		SIZE	RESTRICTED TO
FINISH		APPLICATION SPEC		A3	CAGE CODE
		WEIGHT		DRAWING NO	
		CUSTOMER DRAWING		C= 466122-3	
		SCALE		SHEET 1 OF 2	
				REV D2	

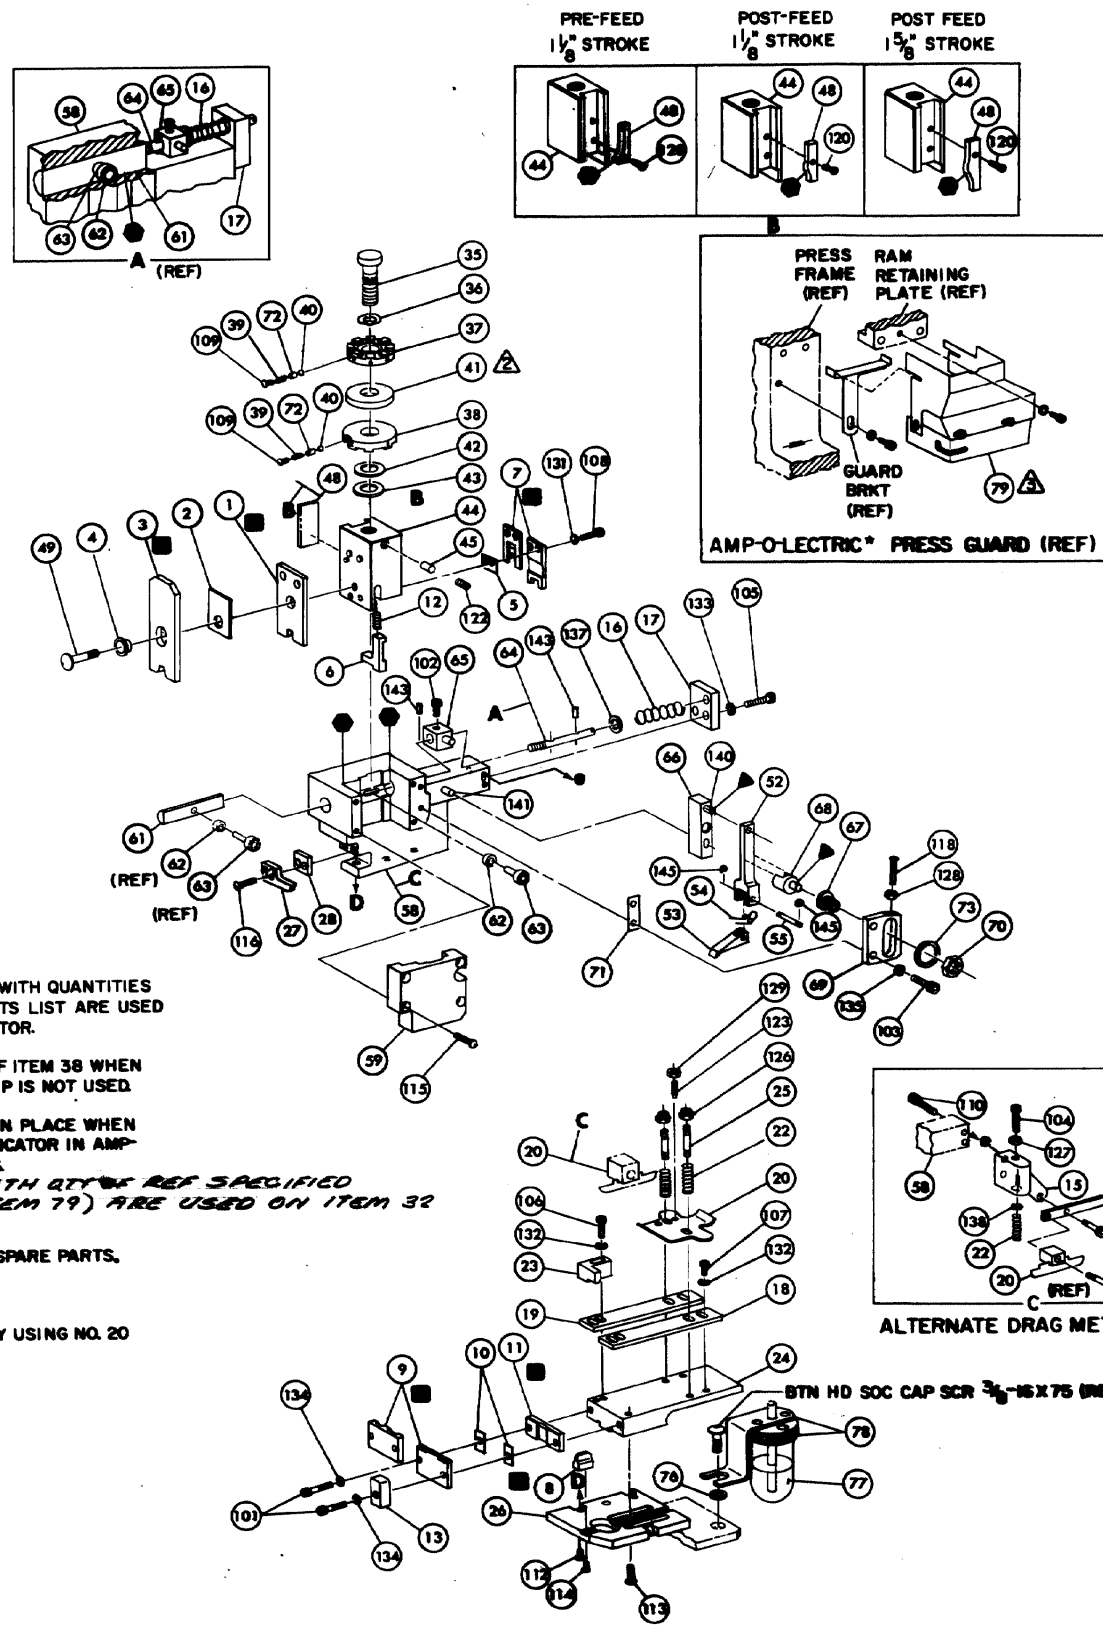

NOTES:

1. ONLY THE ITEMS WITH QUANTITIES SPECIFIED ON PARTS LIST ARE USED ON THIS APPLICATOR.

▲ USED IN PLACE OF ITEM 38 WHEN INSULATION CRIMP IS NOT USED.

▲ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN AMP-O-LECTRIC PRESS.

4. PARTS WITH QTY OF REF SPECIFIED (EXCEPT ITEM 79) ARE USED ON ITEM 32.

KEY:

■ RECOMMENDED SPARE PARTS.

▲ LUBRICATE DAILY USING NO. 20 MACHINE OIL.

● OILING LIGHTLY.

REF	QTY	PART NO	DESCRIPTION	REF	QTY	PART NO	DESCRIPTION
21045-3	146	21045-3	RING, RETAINING 'C' (.187 DIA) FEED PIN	454220-1	98	454220-1	CAP, RAM
5-21028-1	144	5-21028-1	PIN, SLOT SPG (.12 DIA X .50) FD ADJ ROD	453736-1	98	453736-1	HOUSING
1-21030-7	142	1-21030-7	PIN, DOWEL (.187 DIA X 1.50) HOUSING	240624-1	58	240624-1	PIN, FEED FINGER
1-21030-1	140	1-21030-1	PIN, DOWEL (.187 DIA X .50) LEVER	691499-1	54	691499-1	SPRING, FEED FINGER
22280-5	138	22280-5	WASHER, FLAT (NO 6) DRAG SPRING	240635-1	53	240635-1	FINGER, FEED
21899-4	137	21899-4	WASHER, FLAT (5/16 DIA) SCR ADJ	240634-3	52	240634-3	LEVER, TERMINAL
21024-5	136	21024-5	WASHER, LOCK (NO 10) FEED ADJ PLATE	7-21002-9	48	7-21002-9	BOLT, CRIMPER
21024-5	134	21024-5	WASHER, LOCK (NO 10) SHEAR PLATES	690501-3	47	690501-3	CAM, POST FEED 1/8 STROKE
21024-5	133	21024-5	WASHER, LOCK (NO 10) FEED ROD GUIDE		46		
21024-4	132	21024-4	WASHER, LOCK (NO 8) STRIP GUIDE		45		
21024-4	131	21024-4	WASHER, LOCK (NO 8) SHEAR BLADE	690191-1	44	690191-1	PLUG, NYLON
21018-4	130	21018-4	NUT, HEX MACH (4-40) DRAG	455674-1	43	455674-1	RAM
21068-5	129	21068-5	NUT, HEX MACH (6-32) FD ADJ PLATE	690125-1	42	690125-1	WASHER, LAMINATED
21018-7	128	21018-7	NUT, HEX MACH (10-32) DRAG SPRING	690124-1	41	690124-1	WASHER, RAM
21022-2	127	21022-2	NUT, HEX SELF-LKG (8-32) DRAG STUD	690223-1	40	690223-1	SPACER, DISC
5-21004-7	126	5-21004-7	SCR, SKT HD SHLD (250 DIA X .25) DRAG ARM	23241-6	39	23241-6	BALL, STEEL
21004-5	125	21004-5	SCR, SKT HD SHLD (250 DIA X 1.00) DRAG	690170-1	38	690170-1	SPRING, COMPRESSION
4-21078-8	124	4-21078-8	SCR, SKT SET OVAL POINT (4-40 X .75) DRAG		37		DISC, INSULATION
21009-2	123	21009-2	SCR, SKT SET (1/4-20 X .25) (LOC-WEL) RAM	5-690155-0	36	5-690155-0	DISC, WIRE
	122	21009-2	SCR, SKT SET (1/4-20 X .25) (LOC-WEL) RAM	22480-5	35	22480-5	WASHER, SPRING
	121	21009-2	SCR, SKT SET (1/4-20 X .25) (LOC-WEL) RAM	690212-1	34	690212-1	POST, RAM
2-21003-0	120	2-21003-0	SCR, FLAT HD SKT CAP (6-32 X .50) CAM		33		
3-21064-2	118	3-21064-2	SCR, RD HD MACH (6-32 X 1.50) FEED ADJ	458980-2	32	458980-2	APPLICATOR, BASIC (SUB ASSY)
2-21002-2	117	2-21002-2	SCR, BTN HD SKT CAP (8-32 X .50) STRIPPER		31		
2-21002-9	116	2-21002-9	SCR, BTN HD SKT CAP (10-32 X .75) HSG CAP		30		
2-21002-8	115	2-21002-8	SCR, BTN HD SKT CAP (8-32 X .38) (LOC-WEL) ANVIL	3-690451-2	29	3-690451-2	SPACER, STRIPPER
3-21002-3	114	3-21002-3	SCR, BTN HD SKT CAP (1/4-20 X .50) STR GDE PL	240639-1	28	240639-1	STRIPPER
1-24073-9	113	1-24073-9	SCR, BTN HD SKT CAP (1/4-20 X .75) BASE PL	455676-1	27	455676-1	PLATE, BASE
2-21000-4	112	2-21000-4	SCR, SKT HD CAP (6-32 X 1.00) DRAG ADAPTOR	22354-8	26	22354-8	DRAG, STUD
23030-1	111	23030-1	SCR, SKT HD CAP (6-32 X .25) (LOC-WEL) CP DISC	455678-4	25	455678-4	PLATE, STRIP GUIDE
2-21000-9	110	2-21000-9	SCR, SKT HD CAP (8-32 X .75) SHEAR BLADE	4-22281-1	24	4-22281-1	SPRING, DRAG
2-21000-6	109	2-21000-6	SCR, SKT HD CAP (8-32 X .38) STRIP GUIDE	240636-1	23	240636-1	LEVER, DRAG
2-21000-6	108	2-21000-6	SCR, SKT HD CAP (8-32 X .38) STRIP GUIDE	454177-1	22	454177-1	DRAG, STOCK
3-21000-7	107	3-21000-7	SCR, SKT HD CAP (10-32 X .75) FD ROD GUIDE	458030-3	21	458030-3	GUIDE, STRIP (REAR)
3-21000-6	106	3-21000-6	SCR, SKT HD CAP (10-32 X .62) FD ADJ PLATE	458031-3	20	458031-3	GUIDE, STRIP (FRONT)
3-21000-4	105	3-21000-4	SCR, SKT HD CAP (10-32 X .38) PIVOT BLK	454178-1	19	454178-1	GUIDE, FEED ROD
3-21000-8	104	3-21000-8	SCR, SKT HD CAP (10-32 X .88) SHEAR PLATE	4-22284-9	18	4-22284-9	SPRING, FEED RETURN
455745-1	103	455745-1	GUARD, REF		17		ADAPTER, DRAG
465184-9	102	465184-9	LUBRICATOR ASSY		16		
455985-1	101	455985-1	OIL, LUBRICATING		15		
454406-1	79	454406-1	SPACER, LUB BRACKET		14		
458109-1	78	458109-1	WASHER, FLAT (SPECIAL)	690481-9	13	690481-9	SPACER, HOLD DOWN
690603-1	77	690603-1	SPRING, ASSIST	25846-1	12	25846-1	SPRING, HOLD DOWN
690517-1	76	690517-1	SPACER	240833-4	11	240833-4	PLATE, REAR SHEAR
22594-8	75	22594-8	NUT, HEX	1-240645-7	10	1-240645-7	SPACER, SHEAR PLATE
240628-1	74	240628-1	PLATE, ADJ	690796-3	9	690796-3	PLATE, FRONT SHEAR
240626-1	73	240626-1	SHAFT, PIVOT	1-240654-6	8	1-240654-6	ANVIL
240633-1	72	240633-1	BUSHING	1-240651-0	7	1-240651-0	BLADE, SLUG
455680-1	71	455680-1	LEVER, INTERMEDIATE	1-455892-8	6	1-455892-8	HOLD DOWN, TERMINAL
240629-1	70	240629-1	BLOCK, PIVOT	5-240641-7	5	5-240641-7	SPACER, SHEAR BLADE
240632-2	69	240632-2	SCREW, ADJ		4		SPACER, TUBULAR
240659-3	68	240659-3	PIN, CAM ROLLER		3		CRIMPER, INSULATION
240658-1	67	240658-1	CAM, ROLLER		2		SPACER, INSULATION
454398-1	66	454398-1	ROD, FEED	456421-2	1	456421-2	CRIMPER, WIRE

CRIMPING DATA				APPLICATOR WILL APPLY	
PAD LTR	CRIMP HEIGHT	WIRE SIZE	STRIP LENGTH	G1013	
A	.077	14		6259B	
B	.067	16			
C	.060	18			
D	NOT USED				
CRIMP	SIZE	TYPE	FEED	APPL INST	
WIRE	100	F	1.000	A1 0037	
INSUL					
WIRE RANGE 18-14				INSULATION RANGE 565435-5	
REMARKS: AMP-O-LECTRIC POST FEED					
SPL. STAB. SHEARED OFF					

REV	DESCRIPTION	DATE	BY	APP'D
1	REVISION RECORD			
2	REVISION RECORD			
3	REVISION RECORD			
4	REVISION RECORD			

THIS INFORMATION IS CONFIDENTIAL AND IS TO BE KEPT AS SUCH. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.