

#### **ELECTRICALS:**

**CURRENT RATING: 2 AMPS** 

CONTACT RESISTANCE: 15 mOHMS MAX. INSULATOR RESISTANCE: 1000MOHMS MIN.

VOLTAGE: 500V FOR 1 MINUTE TEMPERATURE: -50° TO +100°


# **MATERIALS:**

SHELL: STEEL, NICKEL PLATED

INSULATOR: PBT - BLACK (UL-94-VO)

**RoHS COMPLIANT** 


## NOTE: WILL ACCEPT UPTO 24 AWG WIRE

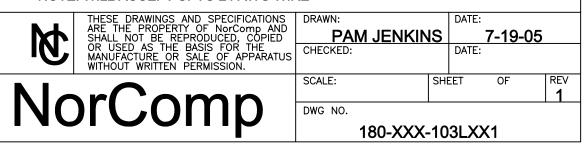


2 = 30 MICRO-INCH GOLD

## **DESCRIPTION:** CLINCH NUT HARDWARE


#### ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS




03X..... .250" (MATING SIDE) - CN8




02X ..... .250" (BOARD SIDE) - CN2



01X ..... .098" (BOARD SIDE) - CN1



91X ..... .225" (BOARD SIDE) - .197 MATING SIDE - CN10/SFS0440 NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

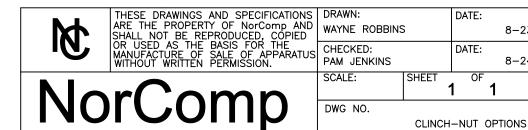

8-23-98

8-24-98

REV