




Orderable Part Number OPN Translation Table

Orderable Part Number OPN Identifiers

The descriptive identifiers within the OPN tell you more about the product attributes. Please find the related information below.

Example for an OPN (the OPN relevant suffix are the last 5 digits)

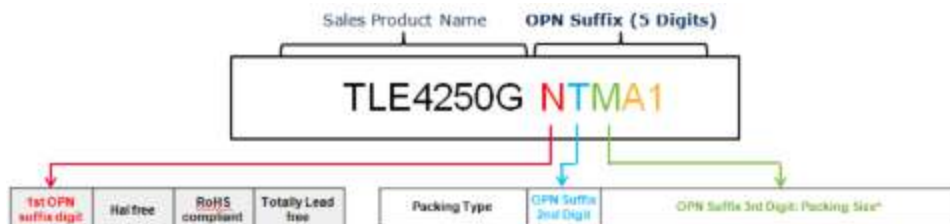

1st digit: RoHS, Halogen and Totally Lead Free Status

OPN suffix 1st digit	Hal free	RoHS compliant	Totally Lead free
1			
A	Yes	Yes	No
B	No	Yes	No
C	Undefined	Yes	No
D	Yes	No	No
N	No	No	No
E	Undefined	No	No
X	Yes	Yes	Yes
H	No	Yes	Yes
F	Undefined	Yes	Yes

2nd and 3d digit: Packing type, Moisture Protection Packing and Packing Size

The 2nd digit shows the functional packing type in combination with the moisture protection packing.

The 3rd digit shows the number of devices per functional packing or the number of functional packings (denoted with 1)

	Packing type	OPN suffix 2nd digit	OPN suffix 3rd digit: Packing Size*				
			S	M	L	X	
Bare Die	ADHESIVE-BAKED PUNCHED TAPE	3	<=2000	<=5000	<=10000	>10000	
	BLISTER TAPE	2	<=2000	<=5000	<=10000	>10000	
	VACUUM RELEASED TRAY	4	<=10	<=50	<=100	>100	
	WAFER SAWN	1	1	<=13	<=25	>25	
	WAFER UNSAWN	6	1	<=13	<=25	>25	
	WAFFLE PACK	5	<=10	<=50	<=100	>100	
	HORIZONTAL FRAME SHIPPER	7	1 ⁽²⁾	<=13 ⁽²⁾	<=25 ⁽²⁾	>25 ⁽²⁾	
Component	MINI-PACK	NON DRY	A	<=1000	<=1500	<=2000	>2000
	BLISTER TRAY	NON DRY	W	<=3 ⁽¹⁾	<=6 ⁽¹⁾	<=10 ⁽¹⁾	>10 ⁽¹⁾
	BULK	NON DRY	B	<=100	<=500	<=1000	>1000
	BULK	DRY	I	<=100	<=500	<=1000	>1000
	CARD BOARD (PRE PACK)		F	1	>1	>=300	>=1000
	CONTAINER	NON DRY	D	<=10	<=20	<=100	>100
	CONTAINER	DRY	Y	<=10	<=20	<=100	>100
	RADIAL REEL		G	<=1000	<=1500	<=2000	>2000
	REEL FOR CHIP CARD		H	1	<=1000	<=10000	>10000
	TAPE & REEL	DRY	U	1 ⁽¹⁾ (180mm)	1 ⁽¹⁾ (330mm)	>1 ⁽¹⁾ (180)	>1 ⁽¹⁾ (330)
	TAPE & REEL	NON DRY	T	1 ⁽¹⁾ (180mm)	1 ⁽¹⁾ (330mm)	>1 ⁽¹⁾ (180)	>1 ⁽¹⁾ (330)
	TAPE & REEL LEFT	DRY	S	1 ⁽¹⁾ (180mm)	1x ⁽¹⁾ (330mm)	>1 ⁽¹⁾ (180)	>1 ⁽¹⁾ (330)
	TAPE & REEL LEFT	NON DRY	R	1 ⁽¹⁾ (180mm)	1x ⁽¹⁾ (330mm)	>1 ⁽¹⁾ (180)	>1 ⁽¹⁾ (330)
	TAPE & REEL RIGHT	DRY	X	1 ⁽¹⁾ (180mm)	1x ⁽¹⁾ (330mm)	>1 ⁽¹⁾ (180)	>1 ⁽¹⁾ (330)
	TAPE & REEL RIGHT	NON DRY	E	1 ⁽¹⁾ (180mm)	1x ⁽¹⁾ (330mm)	>1 ⁽¹⁾ (180)	>1 ⁽¹⁾ (330)
	TRAY	DRY	Q	<=3 ⁽¹⁾	<=6 ⁽¹⁾	<=10 ⁽¹⁾	>10 ⁽¹⁾
TRAY	NON DRY	P	<=3 ⁽¹⁾	<=6 ⁽¹⁾	<=10 ⁽¹⁾	>10 ⁽¹⁾	
TUBE	DRY	L	<=10 ⁽¹⁾	<=20 ⁽¹⁾	<=40 ⁽¹⁾	>40 ⁽¹⁾	
TUBE	NON DRY	K	<=10 ⁽¹⁾	<=20 ⁽¹⁾	<=40 ⁽¹⁾	>40 ⁽¹⁾	

*In devices per functional packing, if denoted with (1) in functional packing per box
(2) Wafer Sawn

	Packing type	OPN suffix 2nd digit	OPN suffix 3rd digit: Packing Size*			
			S	M	L	X
Insulator packing types	Chip	C	1			
	Wafer sawn	J	1	<=13	<=25	>25
	Single Box	N	1			
	Tape & Reel Bare Die	M	<=2000	<=5000	<=10000	>10000
	Trays non-dry	O	<=10	<=50	<=100	>100
	Wafer	V	1			

*In devices per functional packing

Examples for packing type- and size

1. TLE4250G with OPN TLE4250GNTSA1 and TLE4250GNTMA1

This product comes on two different reel sizes: 180mm and 330mm.

One can see from the second digit that the product comes on tape & reel (T). Now the packing size can be determined by the third identifier. This product comes as “S” and “M”.

“S” means 180mm, “M” means 330mm. Even if this detail was not known, it becomes obvious on first sight that TLE4250GNTSA1 is smaller than TLE4250GNTMA1.

2. SAE800G with OPN SAE800GXLLA1

This product comes in Tubes (indicated by the “L” in the 2nd digit). The third digit of the OPN is also an “L” which indicates that there are between 21 and 40 tubes per box.

3. SIPC03S2N03L with OPN SIPC03S2N03LX3MA1

This product comes on Tape & Reel bare die (3). The third identifiers (M) indicates that there are between 2001 and 5000 bare dies on the reel.

Although none of the packing size indications gives an exact number of products per packing, it allows you to distinguish between two different products: You can immediately see which product

4th and 5th digit: Designator

The designator increments (e.g. from A1 to A2) whenever a new SP number is set up that does not differ from a previous product in either Salesname or the first three OPN suffix identifiers. Product variants such as different temperature ranges or ROM codes can therefore be recognized by the designator.

