


PACKAGE: INDIVIDUAL PE BAG.

CONDUCTOR: [26AWG (0.12X12) BARE COPPER] X8C
 INSULATION: (PP6331 ID: 0.95-1.0) X8C

JACKET: PVC NOUL 80P (flexible material)

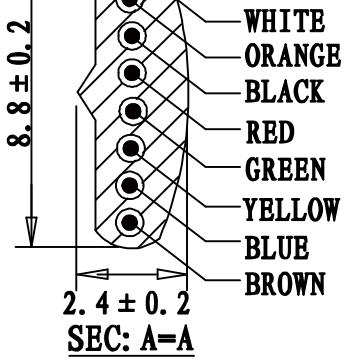

NOTE FOR PLUG:
 MATERIAL: HOUSING-POLYCARBONATE, CLEAR.
 TERMINAL-0.36[.014] THICK PHOSPHOR BRONZE.
 THICK GOLD IN LOCALIZED GOLD PLATE.
 AREA, GOLD FLASH OVER THE REMAINDER.
 OVER 2.54um[.000100] THICK NICKEL
 UNDERPLATE.

P1		P2
1	WHITE	8
2	ORANGE	7
3	BLACK	6
4	RED	5
5	GREEN	4
6	YELLOW	3
7	BLUE	2
8	BROWN	1

PART NO	DRAWING NO	BUYER COLOR	VENDOR COLOR	RETRACTED LENGTH ("L3")	CUSTOMER Accepted ("L2")	CUT LENGTH "L1"
520-26-8800-BL-0005F	A	Black	BLACK LIGHT	700 ± 50	5.0FT-5.75FT	2900-3000
520-26-8800-BL-0007F	B	Black	BLACK LIGHT	1000 ± 50	7.0FT-8.05FT	4000-4200
520-26-8800-BL-0010F	C	Black	BLACK LIGHT	1500 ± 50	10.0FT-11.5FT	5900-6100
520-26-8800-BL-0012F	D	Black	BLACK LIGHT	1650 ± 50	12.0FT-13.8FT	7000-7200
520-26-8800-BL-0014F	E	Black	BLACK LIGHT	1900 ± 50	14.0FT-16.1FT	7600-7800
520-26-8800-BL-0025F	F	Black	BLACK LIGHT	3200 ± 50	25.0FT-28.75FT	14300-14500

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

CnC Tech, LLC		
Industrial Cable and Connector Technology		
IDRAWING NO:	671-305	CUSTOMER: L-671
ITEM NO:	8C COILD CORD P+P PLUG	UNIT: mm
DATE:	2012-02-20	ISSUE: (A/0)
DRAWN:	QE:	QA:
SALES DEPT:	SALES MANAGER:	