



Electrical specifications

Center Frequency: 4075 MHz
Bandwidth: 50 MHz
Return Loss: 1.7 : 1 max
Insertion Loss (F0): 8.0 dB max
Ripple in BW: 1.7 dB max
Input / Output Impedance: 50 Ohms
Rejection: 35dB min at 4000MHz
Rejection 2: 10dB min at 4120MHz
Rejection 3: 35dB min at 4150MHz
Rejection 4: 60dB min at DC~3000MHz
Rejection 5: 55dB min at 4200~6000MHz
Power Handling: 30 dBm max

Mechanical


Mounting Method: SMT
Dimensions: 34 x 14 x 5 mm

Environmental

Operating Temperature: -20 C to 70 C
Storage Temperature: -55 C to +85 C

This product is RoHs compliant.

Outline Drawing:

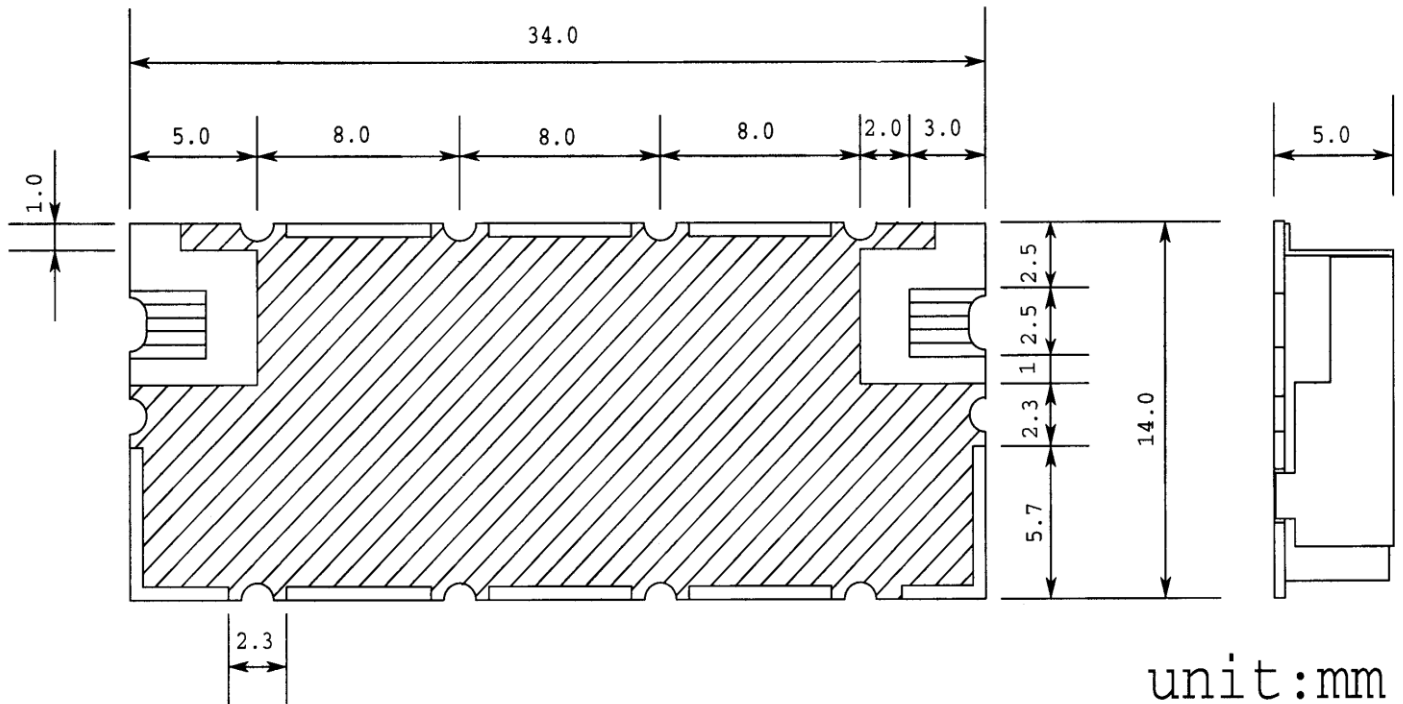

unit:mm