


Fiber Optic Mode Conditioning Patch Cable (SC/LC), 4M (13 ft.)

MODEL NUMBER: N424-04M

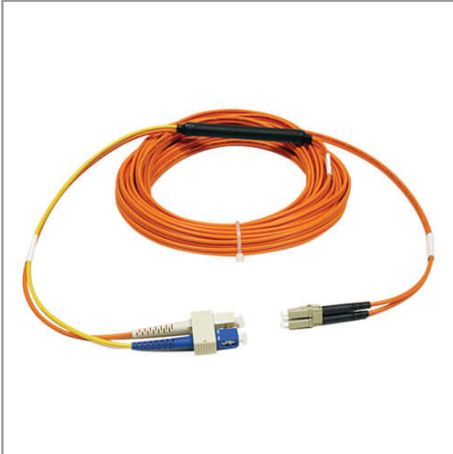

Highlights

- Converts Singlemode SC GBIC to Multimode LC Patch Panel
- 62.5/125 and 9/125
- Run 1000Base-LX Gigabit Ethernet over MMF by offsetting signal loss

Package Includes

- SC / Mode Conditioning to LC Fiber Optic Patch Cable, 4M (13-ft.)

Features

- Converts Singlemode SC GBIC to Multimode LC Patch Panel
- 62.5/125 and 9/125
- Run 1000Base-LX Gigabit Ethernet over MMF by offsetting signal loss

Specifications

| OVERVIEW | |
|-------------------------|-------------------|
| UPC Code | 037332128119 |
| Optical Mode | OM1 |
| PHYSICAL | |
| Cable Jacket Color | Orange; Yellow |
| Connector Color | Blue; Gray; Black |
| Cable Jacket Material | PVC |
| Cable Jacket Rating | OFNR |
| Clad Diameter (microns) | 125 |
| Core Diameter (microns) | 62.5 |
| Number of Fibers | 2 |
| Cable Length (ft.) | 13.1 |
| Cable Length (m) | 3.99 |

| | |
|--------------------------------------|------------------------------------|
| Cable Length (in.) | 157.5 |
| Minimum Bend Radius | 20 mm (Dynamic); 10 mm (Static) |
| Shipping Dimensions (hwd / in.) | 0.25 x 5.20 x 5.50 |
| Shipping Dimensions (hwd / cm) | 0.64 x 13.21 x 13.97 |
| Shipping Weight (lbs.) | 0.10 |
| Shipping Weight (kg) | 0.05 |
| Fiber Cable Length | 4M (13.1 ft) |
| ENVIRONMENTAL | |
| Operating Temperature Range | -4° to 140°F (-20° to 60°C) |
| Storage Temperature Range | -4° to 140°F (-20° to 60°C) |
| Operating Humidity Range | 5% to 85% RH, Non-Condensing |
| Storage Humidity Range | 35% to 65% RH, Non-Condensing |
| COMMUNICATIONS | |
| Attenuation @ 850NM | 3.0 dB/km |
| Insertion Loss | MM to MM 0.20 dB; MM to SM 0.30 dB |
| CONNECTIONS | |
| Side A - Connector 1 | LC DUPLEX (MALE) |
| Side B - Connector 1 | SC DUPLEX (MALE) |
| Endface Polish | PC |
| FEATURES & SPECIFICATIONS | |
| Push/Pull Tabs | No |
| Breakout | No |
| Trunk | No |
| STANDARDS & COMPLIANCE | |
| Product Compliance | RoHS; REACH |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |



1000 Eaton Boulevard
Cleveland, OH 44122
United States



© 2023 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.