



**Data sheet | Item number: 289-436**

Interface module; Pluggable connector per DIN 41612; 48-pole; Harting mating connector; PCB terminal blocks, double-row; in mounting carrier; 2,50 mm<sup>2</sup>



[www.wago.com/289-436](http://www.wago.com/289-436)



**Data**

**Electrical data**

Operating voltage	≤30 VAC; ≤50 VDC
Nominal current	4 A
Contact resistance (max.)	16 mΩ

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Safety and protection

Rated voltage	50 V
Rated surge voltage	1.5 kV
Pollution degree	2
Protection type	IP00; <b>Notice!</b> Live parts can be easily touched! Protection against direct contact must be provided by the equipment manufacturer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be observed for each individual application.

## Connection data

Performance level	1 / 500 mating cycles
-------------------	-----------------------

## Connection 1

Connector	Pluggable connector per DIN 41612; Type F; Male connector
Pole number 1	48
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical

## Connection 2

Design 2	PCB terminal blocks (double-row)
Pole number 2	48
Connection type 2	Field
Connection technology 2	CAGE CLAMP®
WAGO connector 2	WAGO 236 Series
Solid conductor 2	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor 2	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length 2	5 ... 6 mm / 0.2 ... 0.24 inches

## Physical data

Width	128 mm / 5.039 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	39 mm / 1.535 inches

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Mechanical Data

Mounting type	DIN-35 rail
Housing design	PCB with mounting feet

## Material Data

Contact material (connector)	Copper alloy; gold plated
Fire load	1.598 MJ
Weight	140.9 g

## Environmental requirements

Relative humidity	85% (non-condensing)
-------------------	----------------------

## Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 8.0	EC002780
ETIM 7.0	EC002780
PU (SPU)	3 (1) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454432829
Customs tariff number	85366990990

## Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	7b7d912b-f443-4c5b-82ba-8a46e3547f4d
SCIP notification number (Belgium)	faf975f6-24ff-4397-a609-b8c26dc29f80
SCIP notification number (Bulgaria)	a8362302-e96c-4fd0-bb64-e7d1a8629b74
SCIP notification number (Czech Republic)	289c4c75-b3b1-4f88-a29d-aec9c80cde49
SCIP notification number (Denmark)	25f6f79c-9fbf-482f-8597-56556af1d0c3
SCIP notification number (Finland)	22622f05-1bb6-48bd-926e-3542eab493ec

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	9275b0a6-46ee-4bbf-9b71-73c0391c6cd3
SCIP notification number (Germany)	74135dfb-3e3d-4247-8103-5f7596266082
SCIP notification number (Hungary)	55886a55-ce19-48ed-9b1f-4d71601ac192
SCIP notification number (Italy)	b7ad57bb-1847-428d-9c51-b70896c72ec1
SCIP notification number (Netherlands)	289cfee0-3284-44b1-b045-d71989bfec69
SCIP notification number (Poland)	9a2d4b44-0f5c-4a7c-8cb6-9956ba366005
SCIP notification number (Romania)	20798123-ffeb-42d9-906d-57bcabdd2666
SCIP notification number (Sweden)	a80010b1-088e-4c23-8e60-dc1d5c1b3d9e

## Optional accessories

### Marking accessories

Marking strip		
<b>Item no.: 709-196</b>		<a href="http://www.wago.com/709-196">www.wago.com/709-196</a>
Marking strips; for laser printer; translucent		
<b>Item no.: 709-178</b>		<a href="http://www.wago.com/709-178">www.wago.com/709-178</a>
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white		
<b>Item no.: 709-177</b>		<a href="http://www.wago.com/709-177">www.wago.com/709-177</a>
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent		

## Downloads

### Documentation

#### Bid Text

289-436	2019 年2月19 日	xml	Download
X81 - Datei		3.5 kB	
289-436	2015 年2月9 日	doc	Download
doc - Datei		26.6 kB	

#### Instruction Leaflet

		pdf	Download
		1.3 MB	

#### Additional Information

Disposal and Recycling	V 1.1.0	pdf	Download
Electrical and electronic equipment, Batteries, Packaging	2022 年8月18 日	2.2 MB	

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## CAD/CAE-Data

### CAE data

WSCAD Universe 289-436	<a href="#">URL</a>	<a href="#">Download</a>
EPLAN Data Portal 289-436	<a href="#">URL</a>	<a href="#">Download</a>


## Environmental Product Compliance

### Compliance Search


Environmental Product Compliance 289-436	<a href="#">URL</a>	<a href="#">Download</a>
Interface module; Pluggable connector per DIN 41612; 48-pole; Harting mating connector; PCB terminal blocks, double-row; in mounting carrier; 2,50 mm <sup>2</sup>		

## Installation Notes

### Conductor termination

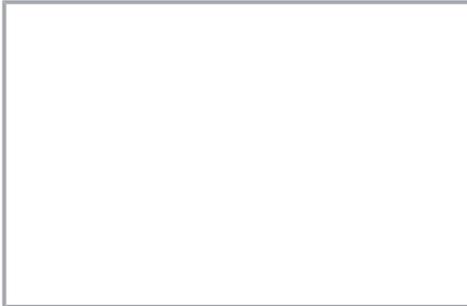

Conductor termination – screwdriver actuation parallel to conductor entry

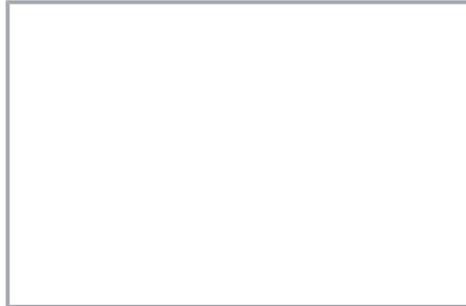

Conductor termination – screwdriver actuation perpendicular to conductor entry

Subject to changes. Please also observe the further product documentation!