

	Ŧ	۵	п	m	0
-					



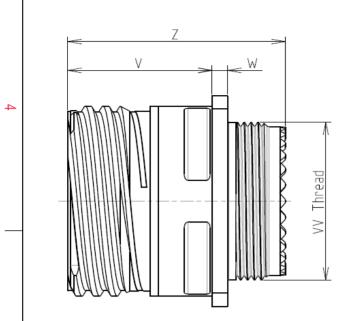

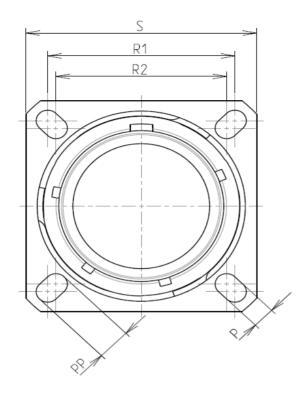

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite -Shell Plating : Without Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy $0.8 \mu m$ minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +175°C -Temperature Range

: 2000 hours

: 9.6 g ± 10%

8D 0

G

11

Х

99

В


А

F

Connecto	Connector dimension		
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

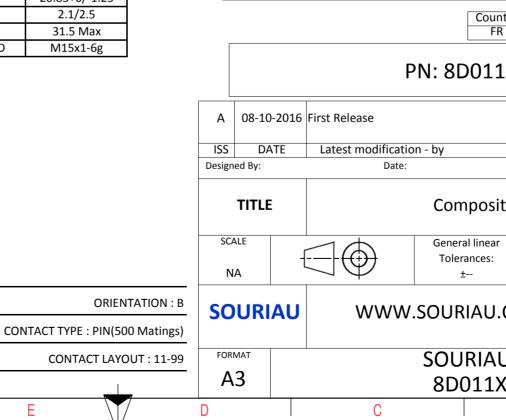

	Φ		A		
					4
AS EXA	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisc 99AB	mply wit by a thirc otice.)	h I party Control List		2
	1			MOD N°	-
site	customer drawing e Receptacle 8D series				
ar :	NPRDS / PROJECT 859				
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1
U DRG N° X99AB-C				SHEET	
.79	BAB-C		A	±, 2	J

	<u>т</u>	۵	г	m	D	0
		Contact Layout				Panel Cutou
4	-×	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			٨	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positi ID A B C C D E F G Shell Arrangement Numb size no.	f consol f consol (mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 130 (3.30) +.000 (0.00) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) +.000 (0.00) +.000 (0.00)	1		¥	
ى	11 -99 7					Dim ØA ØAA R1 ØT
	L_					
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR
					A 08-10-20	PN: 8D011X
					ISS DATE Designed By:	Latest modification - by Date:
					SCALE	Composite General linear
_						
					FORMAT A3	SOURIAU
l	Н	G	F	E	D	8D011X9

