
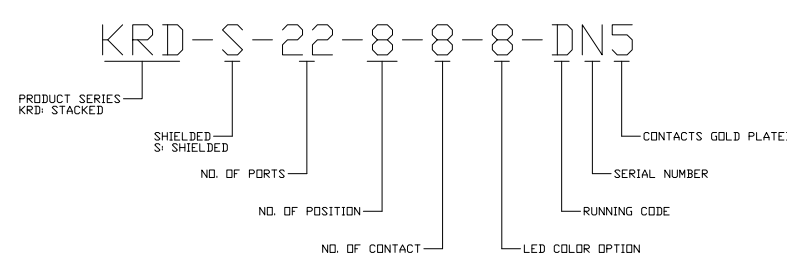
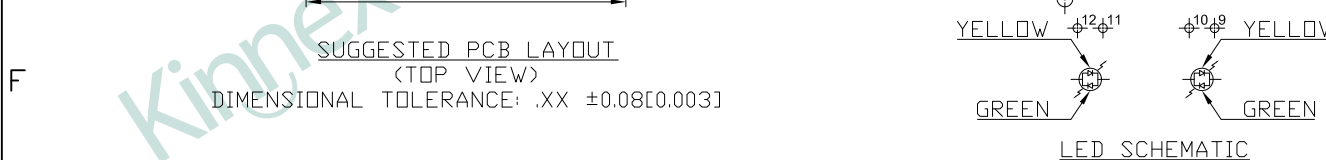
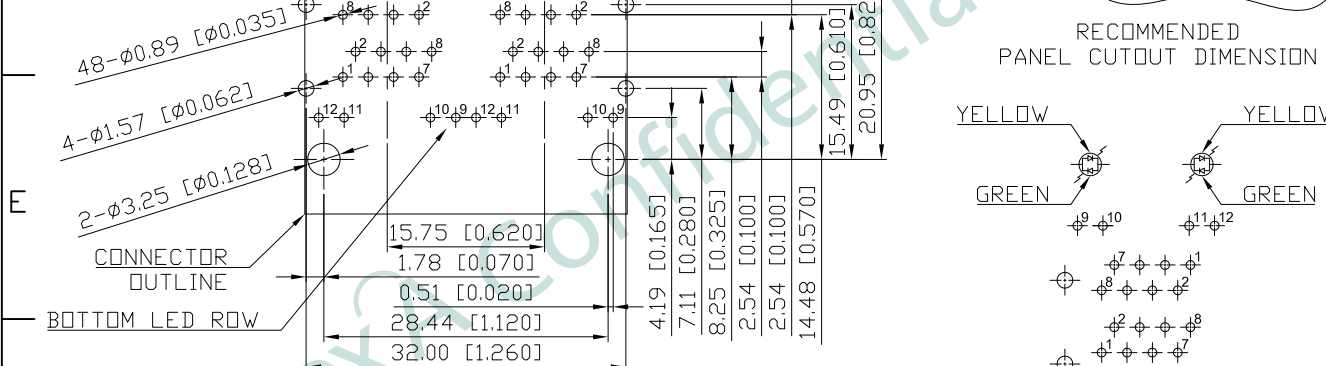
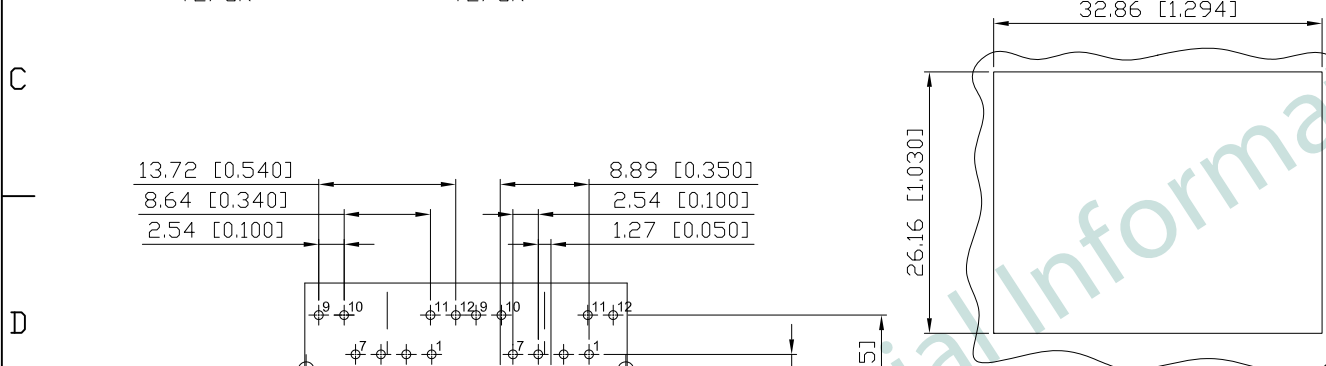


1. MECHANICAL DIMENSIONS :

REV.	DATE	DESCRIPTION
01	Jan. 11, '18	1st RELEASE


NOTES:

- MATERIAL:  
HOUSING: HIGH THERMOPLASTIC, UL94V-0, BLACK  
CONTACTS: T=0.35mm PHOS-BRONZE,  
GOLD FLASH PLATING ON CONTACT AREA,  
NICKEL UNDERPLATING ON ALL AREA,  
TIN ON TERMINATION END  
SHIELD: T=0.25mm COPPER ZINC ALLOY, NICKEL PLATING
- OPERATING TEMPERATURE: -40°C~+85°C
- INSERTION FORCE: 4 POUNDS MAX.  
EXTRACTION FORCE: 4 POUNDS MAX.
- DURABILITY: 750 MATING CYCLED MIN.
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]  
.X ±0.30[0.012]

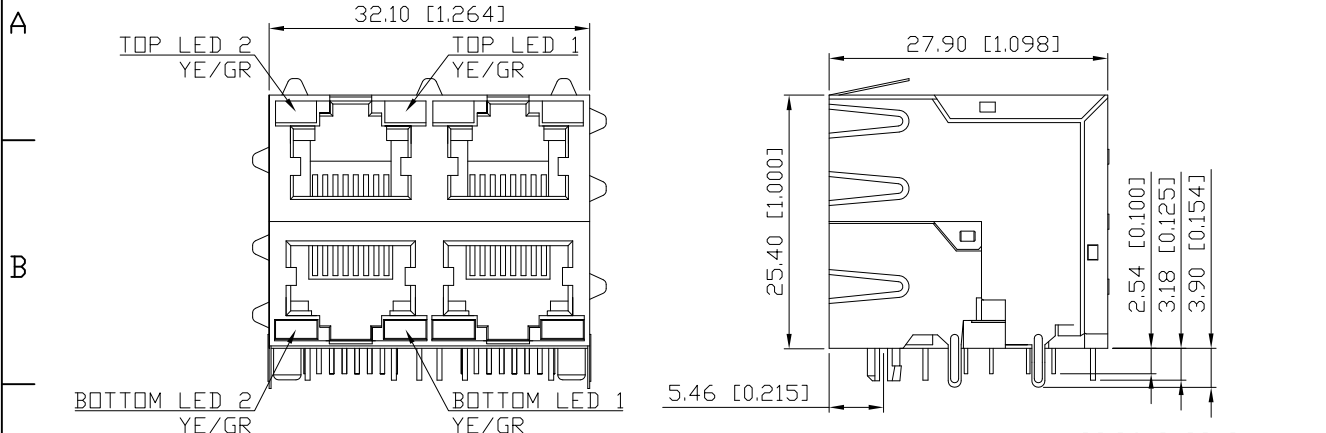


PART NO		KRD-S-22-8-8-8-DN5			
TITLE	RJ45 2X2 8P8C, W/LED, SHIELDED, STACKED TYPE				
REV : 01					
UNIT	DRAWN	CHKD	DATE	SHEET	
mm[inch]	CINDY	DANIEL	Jan. 11, '18	1 of 2	

2. PROFILE OF WAVE SOLDER :

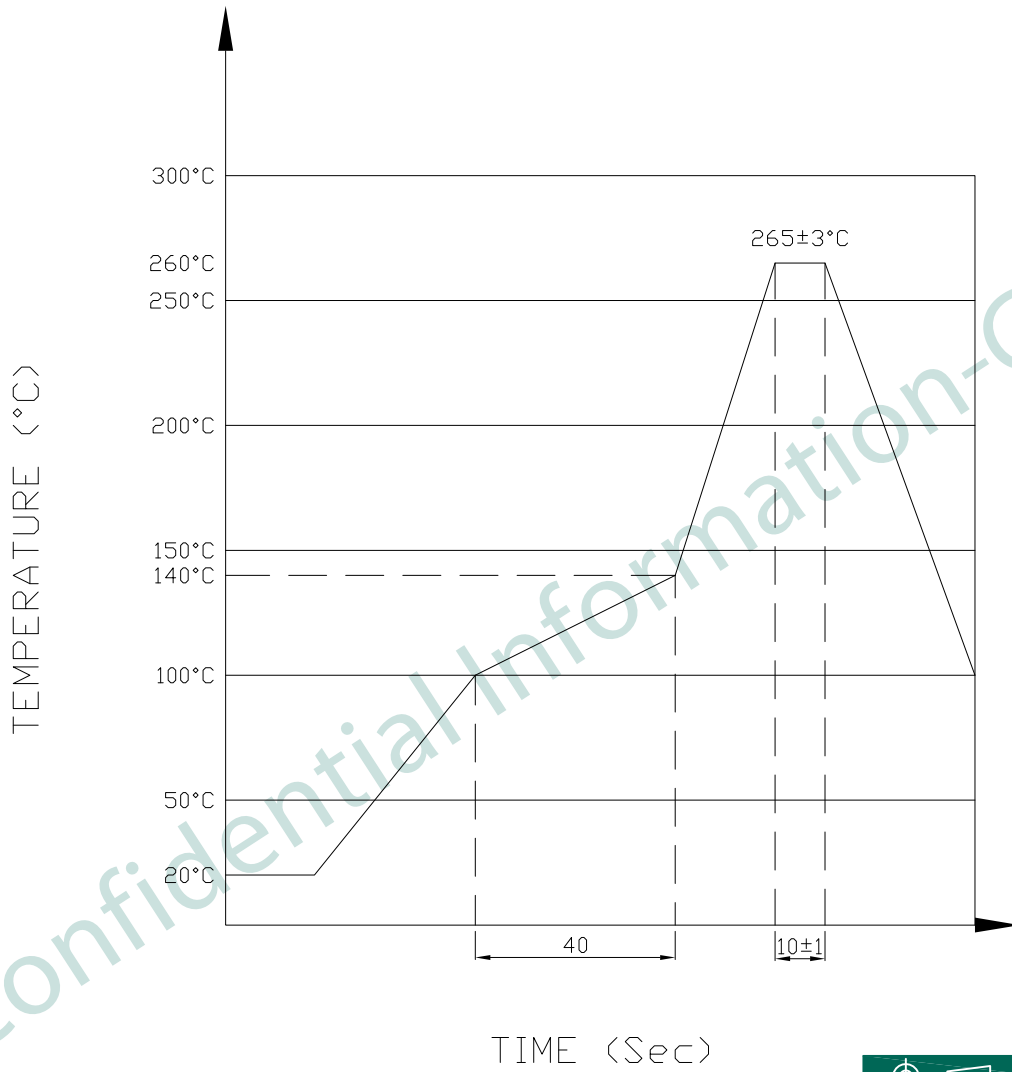

The measuring point for the specified temperature shall be on the soldered part of the lead

 PART NO KRD-S-22-8-8-8-DN5				
TITLE	RJ45 2X2 8P8C, W/LED, SHIELDED, STACKED TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Jan. 11, '18	2 of 2