



soberton inc.

# ELECTRO MAGNETIC BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Dimensions

### Page 2

Reliability Test

### Page 3

Electrical And Acoustical Measuring Condition

Typical Frequency Response Curve

### Page 4

Surface Mounting Condition

### Page 5

Packing

## Specifications

Item	Unit	Specifications
Rated Voltage	Vo-p	3.6
Operating Voltage	Vo-p	2.5 ~ 4.5
Rated Current	mA	Max. 100 at 2.731KHz 50% duty cycle, square wave, 3.6Vo-p
Sound Output	dB	Min. 85 at 2.731KHz 50% duty cycle, square wave, 3.6Vo-p
Coil Resistance	$\Omega$	16 $\pm$ 3
Resonant Frequency	Hz	2731
Operating Temperature	$^{\circ}$ C	-20 ~ +70
Storage Temperature	$^{\circ}$ C	-30 ~ +80
Dimensions	mm	8.5 $\times$ 8.5 $\times$ H3.0
Housing Material		Black LCP
Terminal		SMD
Net Weight	gram	Approx. 0.6
Environmental Protection Regulation		RoHS 2.0


### Measuring Condition:

Temperature: 5~35 $^{\circ}$ C Humidity: 45%~85%R.H Atmospheric Pressure: 860 ~1060hPa

## Dimensions

Unit: mm

Tolerance:  $\pm$ 0.3mm, except where specified

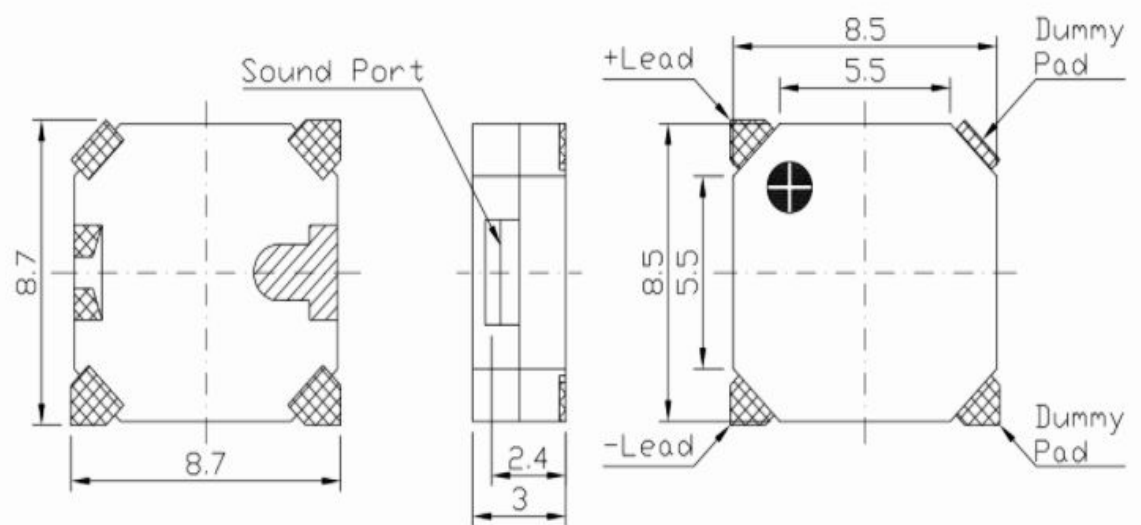

Housing Material: Black LCP  
Leading Pin: Tin Plated Brass



soberton inc.

# ELECTRO MAGNETIC BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Dimensions

### Page 2

Reliability Test

### Page 3

Electrical And Acoustical  
Measuring Condition

Typical Frequency Response  
Curve

### Page 4

Surface Mounting Condition

### Page 5

Packing

## Reliability Test

After any of the following tests the part shall meet specifications without any degradation in appearance and performance, except SPL. SPL shall meet the specifications and shall not deviate more than -10dB from the initial value.

### Standard Temperature Life Test

The part shall be subjected to 96 hours at  $25\pm 10^{\circ}\text{C}$ .

Input rated voltage: 3.6 Vo-p

Resonant frequency: 2731Hz, 50% duty cycle, square wave.

### High Temperature Test

The part shall be capable of withstanding a storage temperature of  $+80^{\circ}\text{C}$  for 96 hours.

### Low Temperature Test

The part shall be capable of withstanding a storage temperature of  $-30^{\circ}\text{C}$  for 96 hours.

### Humidity Test

Temperature  $+40^{\circ}\text{C}\pm 3^{\circ}\text{C}$

Relative Humidity 90% ~ 95%

Duration 48 hours and exposure to room temperature for 6 hours

### Temperature Shock Test

Per cycle

$70^{\circ}\text{C}/1\text{ hour} \rightarrow 25^{\circ}\text{C}/3\text{ hours} \rightarrow -30^{\circ}\text{C}/1\text{ hour} \rightarrow 25^{\circ}\text{C}/3\text{ hours}$

Total cycle 10 cycles

### Drop Test

Standard Packaging from 1.2m

Drop on hardwood or a board of 5cm thick, three sides, six plain.

### Vibration Test

Vibration 1000 cycles/min.

Amplitude 1.5mm

Duration 1 hour in each 3 axes

### Note

Please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. Contamination may result in a loss of some or all audio output.



soberton inc.

# ELECTRO MAGNETIC BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

**Page 1**  
Specifications  
Dimensions

**Page 2**  
Reliability Test

**Page 3**  
Electrical And Acoustical  
Measuring Condition

Typical Frequency Response  
Curve


**Page 4**  
Surface Mounting Condition

**Page 5**  
Packing


## Electrical And Acoustical Measuring Condition

### Recommended Driving Circuit

Resonant frequency, 50% duty cycle, square wave.  
Signal amplitude should be large enough to saturate the transistor.

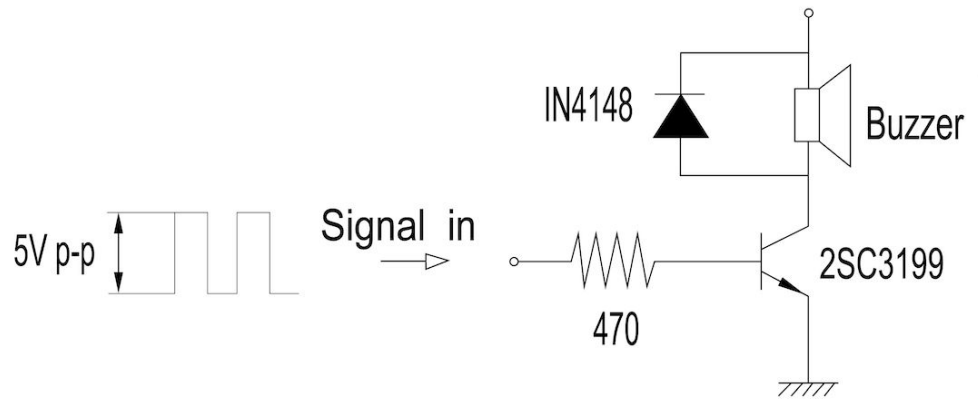


### Recommended Setting

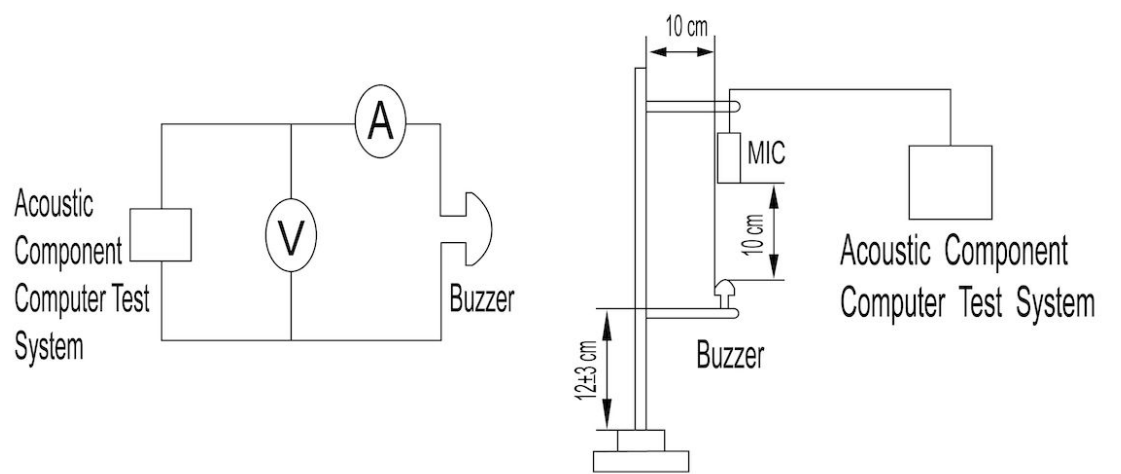

## Typical Frequency Response Curve

3.6Vo-p, 50% duty cycle, square wave, 10cm

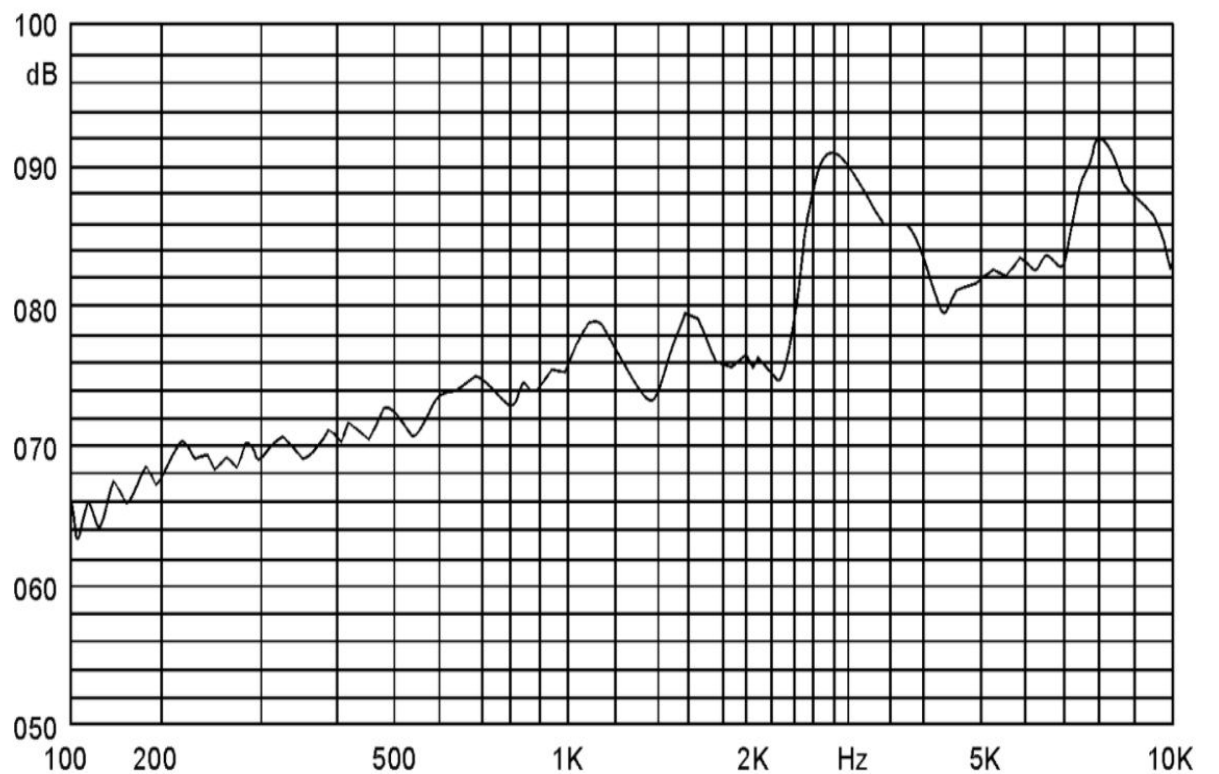



soberton inc.

# ELECTRO MAGNETIC BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Dimensions

### Page 2

Reliability Test

### Page 3

Electrical And Acoustical  
Measuring Condition

Typical Frequency Response  
Curve

### Page 4

Surface Mounting Condition


### Page 5

Packing

## Surface Mounting Condition

### Reflow Soldering

Recommended reflow soldering condition is as follows.

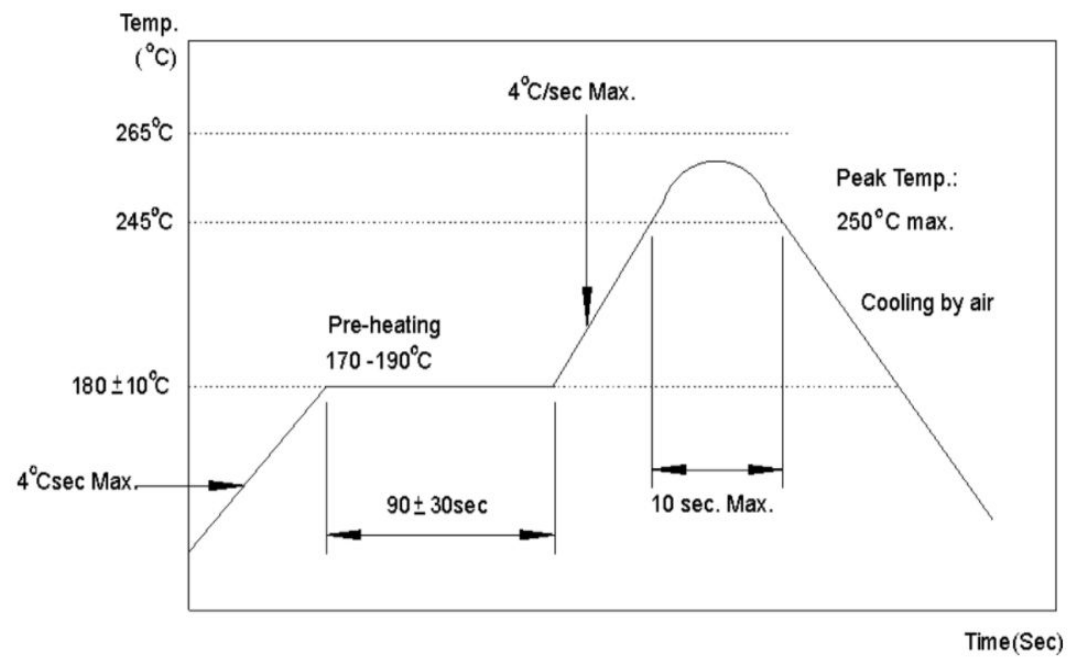

### Note:

1. In automated mounting of the SMD sound transducers on PCB, any bending, expanding or pulling forces, or shocks against the SMD sound transducers should be kept to a minimum to prevent electrical failures and mechanical damage to the devices.
2. In the reflow soldering, soldering temperatures that are above specification and extreme gradients such as rapid heating or cooling may cause electrical failures and mechanical damage to the devices.



soberton inc.

# ELECTRO MAGNETIC BUZZER

Acoustic Product Specification

Product Number: ST-03BHT



Release | Revision: A/2022

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Dimensions

### Page 2

Reliability Test

### Page 3

Electrical And Acoustical  
Measuring Condition

Typical Frequency Response  
Curve





### Page 4

Surface Mounting Condition

### Page 5

Packing

## Packing

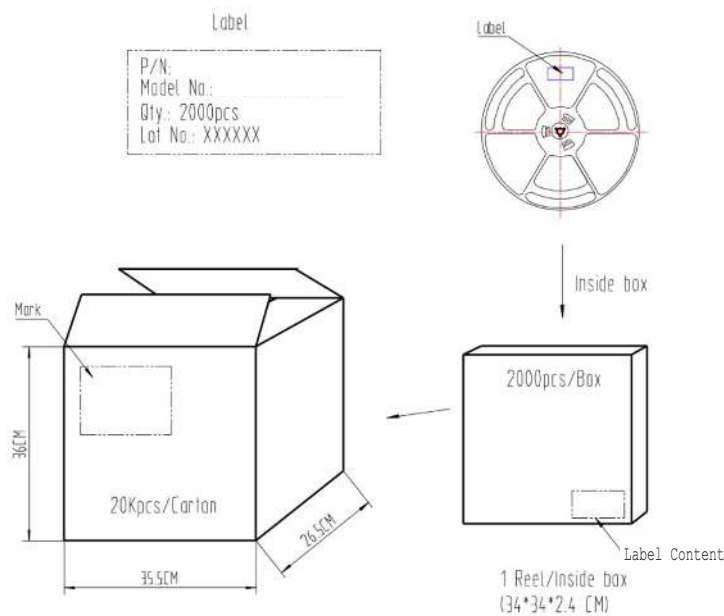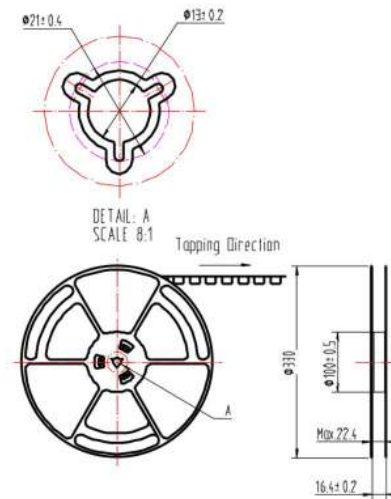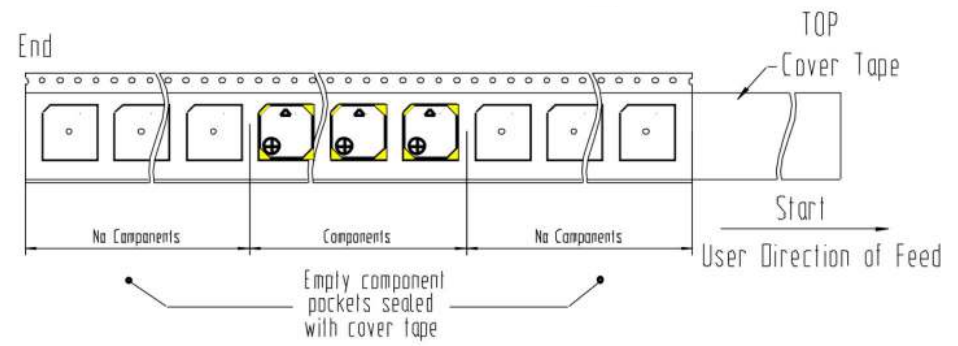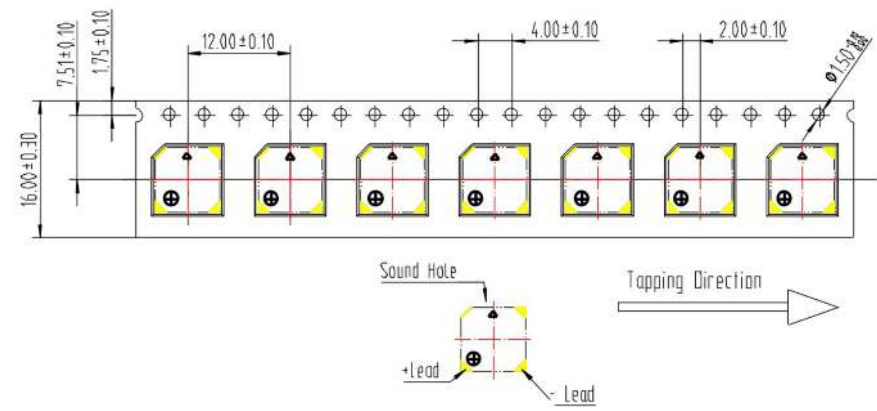

### Packing Order:

1. Per Reel: 2,000pcs
2. Per Carton: 10 Reels
3. Per Carton: 20,000pcs
4. Carton Size: 35.5x26.5x36cm