


② **USB2.0 COMPLIANT**

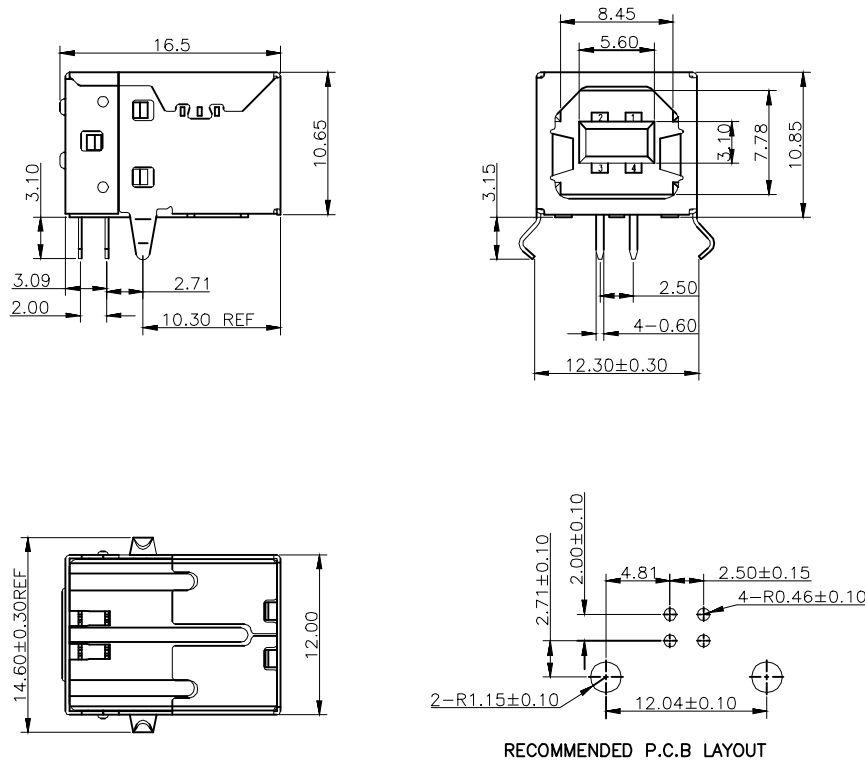

NOTES:

1. Material:
 - 1.1 Housing: PBT+30%GF UL94V-0, Color White
 - 1.2 Shell: Brass
 - 1.3 Contact :Phosphor Bronze
2. FINISH:
 - 2.1 Contact Area: Selective 5u"Au
 - Solder Area: Tin Plated
 - Under: Ni Plated
3. MECHANICAL:
 - 3.1 Mating Force: 3.57kgf Max.
 - 3.2 Unmating Force: 1.02kgf Min
 - 3.3 Durability: 1500 cycles Min
4. ELECTRICAL:
 - 4.1 Current Rating: 1.5A
 - 4.2 Dielectric Strength: 500V AC FOR 1 MINUTE
 - 4.3 Contact Resistance: 30mΩ Max
 - 4.4 Insulation Resistance: 1000 MΩ Min
5. Operating temperature: -55°C TO +85°C
6. PACKIING: Tray

RoHS compliant

Scale	Free						Date	Name	Customer-No.
	TOLERANCE						Drawn	07.06.2013	Winnie
.X	±0.30						Approved	24.01.2014	Winnie
.XX	±0.20								ASSMANN WSW-No.
.XXX	±0.10	②	Update	24.07.2019	Xavier				① AU-Y1007
DIM	TOL	①	Change the P/N AU-Y1007-R into AU-Y1007	22.01.2014	Winnie			Drawing-No.	
X.°	±5°	①	Drawn	07.06.2013	Winnie			ASS 5778 CO	
Angle	TOL	①				Replace		SHEET	
UNIT	mm	ld.	Modification	Date	Name				