
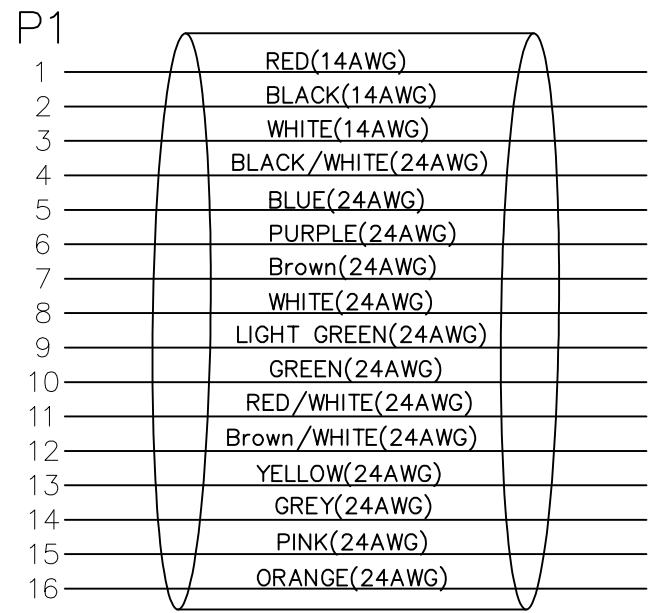



5	6	7	8
REV.	ECN NO.	DATE	SIGN
C1	NA	2022/06/24	Hu
			DESCRIPTION
			First Version

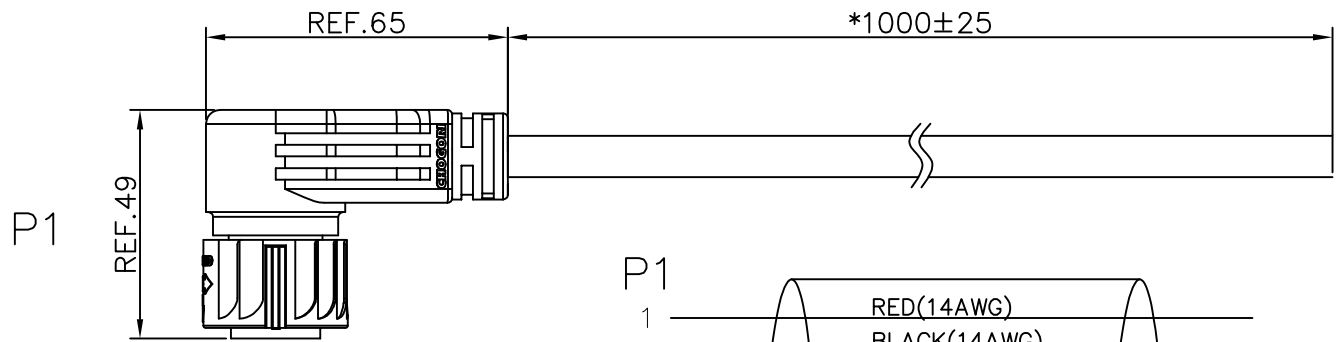

OPEN

- SPECIFICATIONS&TEST REQUIREMENTS
- 1.TEMPERATURE RATING: -40℃~105℃
 - 2.CURRENT RATING : 3*20A+14*3A
 - 3.VOLTAGE RATING: 72V DC
 - 4.INSULATION RESISTANCE: 20MΩ@500V DC,1MIN
 - 5.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC, 1MIN
 - 6.MATING CYCLE: 2000CYCLES.
 - 7.WATERPROOF RATING: IP67(MATING).
 - 8.ROHS COMPLIANT.

2	900-01601-00003	A/R	M	3C*14AWG+(13*24AWG+AL)+P PVC Black
1	24313134-01-001-501	1	PC	Large3+13 Push lock
No.	Material No.	Q'ty	Unit	Material Description
Material List				
ITEM NO.	11C03622051601	DRAWN BY	Hu Zhou	DATE
DWG NO.		CHECKED BY	Zhong Peng	DATE
CUSTOMER NO.		APPROVED BY	Eric	DATE
				2022/06/24

UNIT: mm	TITLE	
UNSPECIFIED TOLERANCE	Large3+13 Push lock cable assm	
SCALE N/A	SHEET 1 of 1	
REV. C1	SIZE A4	* Inspection Item

CHOGORI
Chogori Technology Co., Ltd

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.