
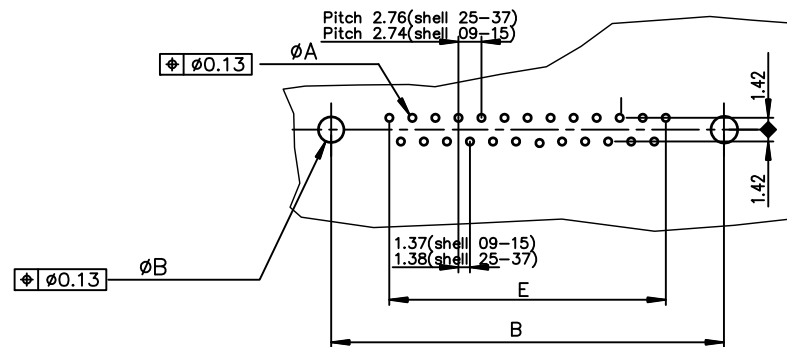


PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

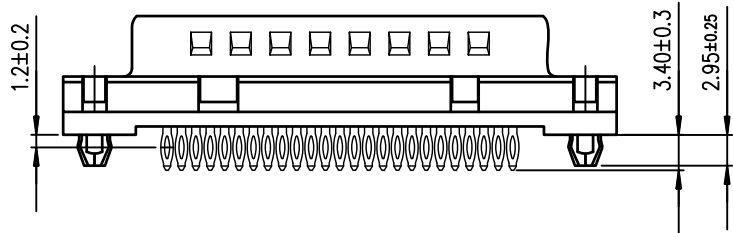

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	Gold Flash	0.76µ Gold	1.25µ Gold
09	30.81	24.99	16.96	16.79	10.96	D09P90C4GL00LF	D09P90C6GL00LF	D09P90C8GL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P90C4GL00LF	D15P90C6GL00LF	D15P90C8GL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P90C4GL00LF	D25P90C6GL00LF	D25P90C8GL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P90C4GL00LF	D37P90C6GL00LF	D37P90C8GL00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection		product family D-SUB	
ltr				ecn no		dr		date		title	
H				ELX-I-12654		AB		2015-10-26		MALE DELTA-D LOW PROFILE STRAIGHT PRESS-FIT	
J				ELX-I-24020		AAB		2016-06-06		scale 2:1	
				angles		linear				dwg no sheet 1 of 1 size	
				0±2'		.000±0.1				C01-8646-0369 A3	
				dr		PESSON		1995-10-03		Amphenol FCI	
				engr		MITHUN PAUL		2016-06-06		type Product Customer Drawing	
				chr		ATHUL A.B		2016-06-06			
				appd		BIJU K PAUL		2016-06-06			
sheet index		revision sheet		J		1					