


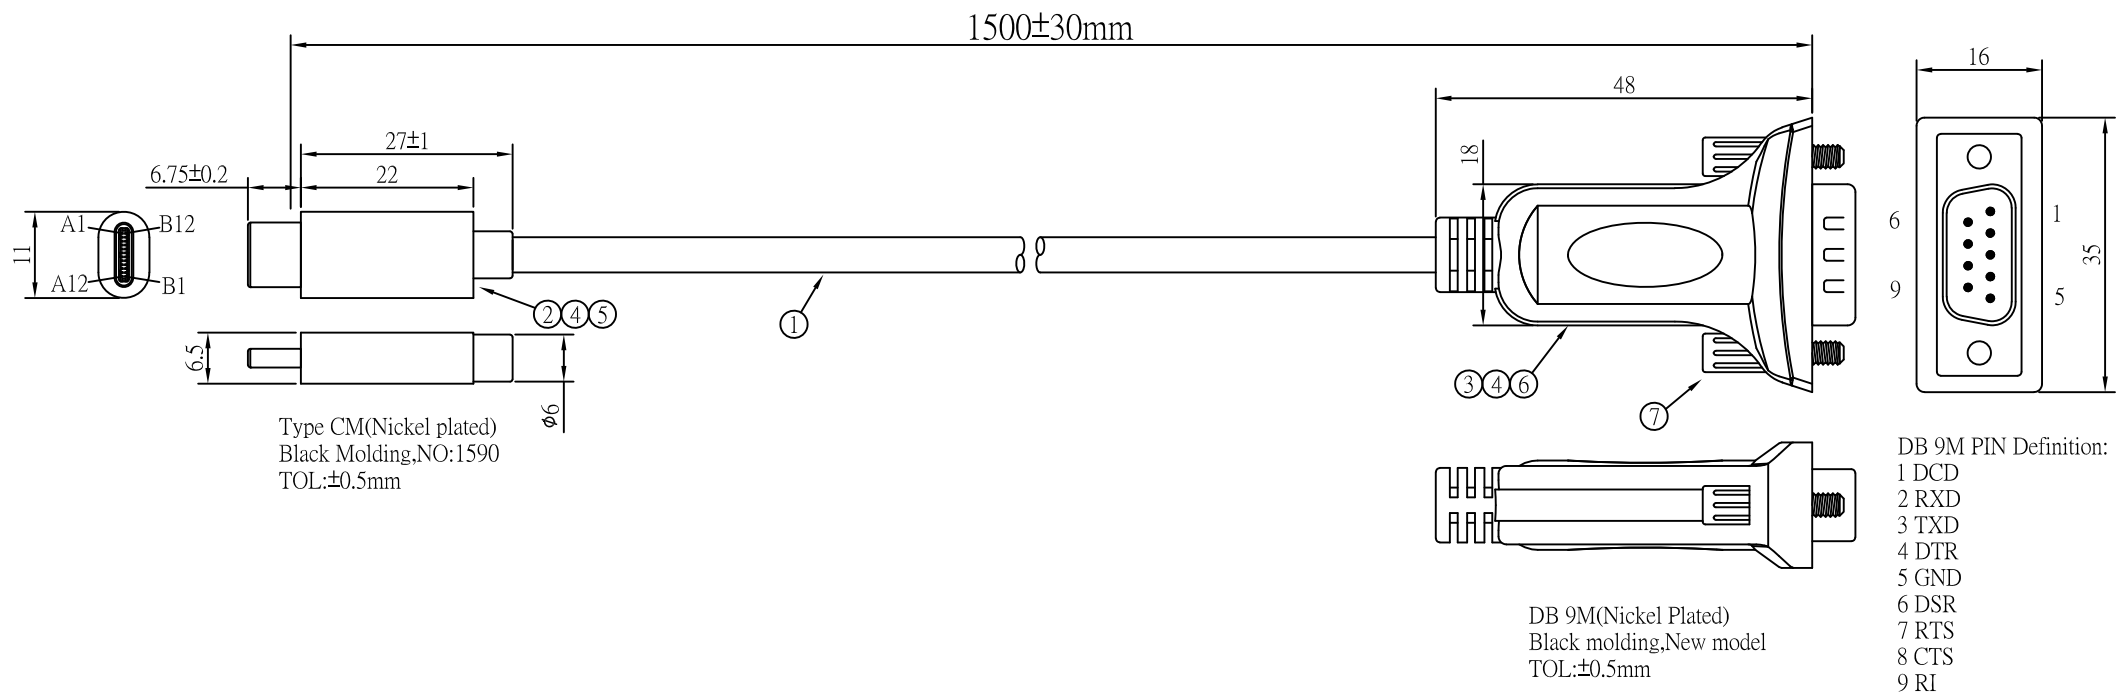

PIN ASSIGNMENT:

Type CM	A4+B4+A9+B9	A7	A6	A1+B1+A12+B12+64
PCB	V	N	P	G
	Red	White	Green	Black+D
		TP		

OPEN/SHORT TEST: 100% TEST.
INSULATION: MIN 5M.

⑧	CD	1PCS
⑦	Screw: PA11.5,Black,#4-40	2PCS
⑥	PCBA: KA-881 REV1.0(IC: FT232RL+ZT213LEEA)	1PCS
⑤	PE	5g
④	Black 45P PVC	10g
③	DB 9M(Black Insulator,Nickel Plated)	1PCS
②	Type CM(Black Insulator,Nickel Plated),2.0,4PIN,5.1K,No Capacitance	1PCS
①	UL2725 28#*1P+24#*2C+AL+D+B(16*3/0.12AM) OD=4.5mm Black PVC Jacket	1PCS
No.	Description	Q'ty

Company	Premier cable	Goods Code		Draw	OYH	Date	2021.10.08
ITEM NO.	PCM-KW-220	Drawing Evidence		Check		Date	
Goods NO.	Type CM-DB 9M			Approval		Date	
Original NO.		Unit(mm)		Audit		Date	

Premier Cable

D		
C		
B		
VER.A	REVISE	Date