

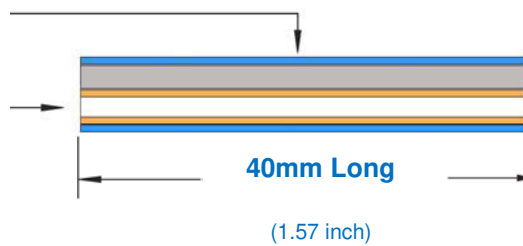





PS-99-X40C

12 Ribbon Fiber fusion splice protector sleeve

Product Dimensions

Sleeve Diameter After Shrinkage	3.75-4.75 mm (0.15 x 0.19 inch)
Supplied Internal Rectangular Bore	3.5 x 1.0 mm (0.14 x 0.04 inch)
Ribbon fiber size	1-12 Way
Reinforcing Member	White Ceramic Rod
Color	Clear
Package Quantity	Bag 50



-  Heat Shrink Outer Polyolefin Tube
-  Hot-Melt Adhesive Inner Tube
-  Ceramic Reinforcing Rod

Product Features

- Provides mechanical and environmental protection to fiber splices after fusion splicing
- Bellcore (Telcordia) GR-1380-CORE Certification
- UL 224 approved YDPU2.E467437 high quality materials
- Pre-shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- White Ceramic reinforcing member
- 25+ years of specialist manufacturing experience with proven long-term reliability
- Compatible with most ribbon fibers, splice trays and ribbon splice ovens
- RoHS & REACH Compliant and Conflict Free



Member #0240

