

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

UYA

Chip Type, Long Life Assurance



NEW

- Chip type, Extended load life of 5000hours at +125°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

UYA ← Long Life Higher Capacitance **UCZ**




■ Specifications

Item	Performance Characteristics												
Category Temperature Range	-40 to +125°C												
Rated Voltage Range	63 to 100V												
Rated Capacitance Range	90 to 880μF												
Capacitance Tolerance	± 20% at 120Hz, 20°C												
Leakage Current ≈	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3(μA),whichever is greater.												
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C <table border="1"> <tr> <th>Rated voltage (V)</th> <th>63</th> <th>80</th> <th>100</th> </tr> <tr> <th>tan δ (max.)</th> <td>0.12</td> <td>0.12</td> <td>0.1</td> </tr> </table>				Rated voltage (V)	63	80	100	tan δ (max.)	0.12	0.12	0.1	
Rated voltage (V)	63	80	100										
tan δ (max.)	0.12	0.12	0.1										
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <tr> <th>Rated voltage (V)</th> <th>63</th> <th>80</th> <th>100</th> </tr> <tr> <th>Impedance ratio (max.)</th> <td>Z(-40°C) / Z(+20°C)</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>				Rated voltage (V)	63	80	100	Impedance ratio (max.)	Z(-40°C) / Z(+20°C)	3	3	3
Rated voltage (V)	63	80	100										
Impedance ratio (max.)	Z(-40°C) / Z(+20°C)	3	3	3									
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours at 125°C.												
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.												
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.												
Marking	Black print on the case top.												

※ I : Leakage Current(μA), C : Rated Capacitance(μF), V : Rated Voltage(V)


■ Chip Type

(φ12.5 to φ18)

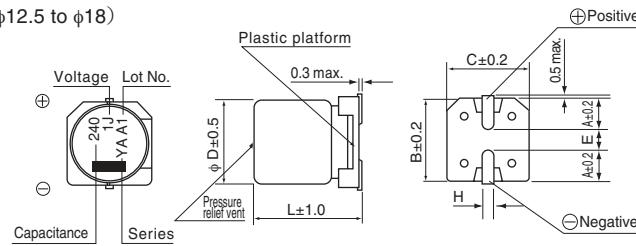

(mm)					
φD×L	12.5×13.5	16×16.5	16×21.5	18×16.5	18×21.5
A	5.15	5.65	5.65	6.65	6.65
B	13.6	17.1	17.1	19.1	19.1
C	13.6	17.1	17.1	19.1	19.1
E	3.3	5.8	5.8	5.8	5.8
L	13.5	16.5	21.5	16.5	21.5
H	1.0 to 1.4				

Type numbering system (Example : 63V 240μF)

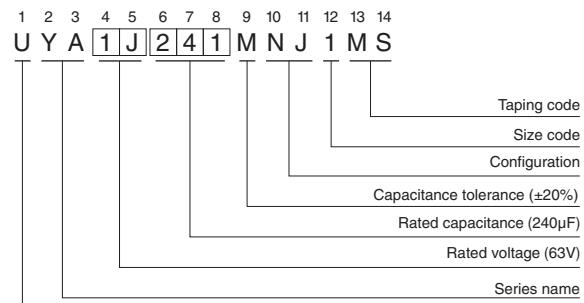

● Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

● Dimension table in next page.

CAT.8100L

UYA

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D×L(mm)	$\tan \delta$	Leakage Current (μ A) (at 20°C after 2 minutes)	Rated Ripple (mArms) (125°C/100kHz)	Part Number
63 (1J)	240	12.5×13.5	0.12	151.2	650	UYA1J241MNJ1MS
	430	16×16.5	0.12	270.9	930	UYA1J431MNJ1MS
	560	18×16.5	0.12	352.8	1000	UYA1J561MNJ1MS
	660	16×21.5	0.12	415.8	1500	UYA1J661MNJ1MS
	880	18×21.5	0.12	554.4	1600	UYA1J881MNJ1MS
80 (1K)	160	12.5×13.5	0.12	128	650	UYA1K161MNJ1MS
	270	16×16.5	0.12	216	930	UYA1K271MNJ1MS
	360	18×16.5	0.12	288	1000	UYA1K361MNJ1MS
	430	16×21.5	0.12	344	1500	UYA1K431MNJ1MS
	560	18×21.5	0.12	448	1600	UYA1K561MNJ1MS
100 (2A)	90	12.5×13.5	0.10	90	650	UYA2A900MNJ1MS
	160	16×16.5	0.10	160	930	UYA2A161MNJ1MS
	200	18×16.5	0.10	200	1000	UYA2A201MNJ1MS
	240	16×21.5	0.10	240	1500	UYA2A241MNJ1MS
	330	18×21.5	0.10	330	1600	UYA2A331MNJ1MS