




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

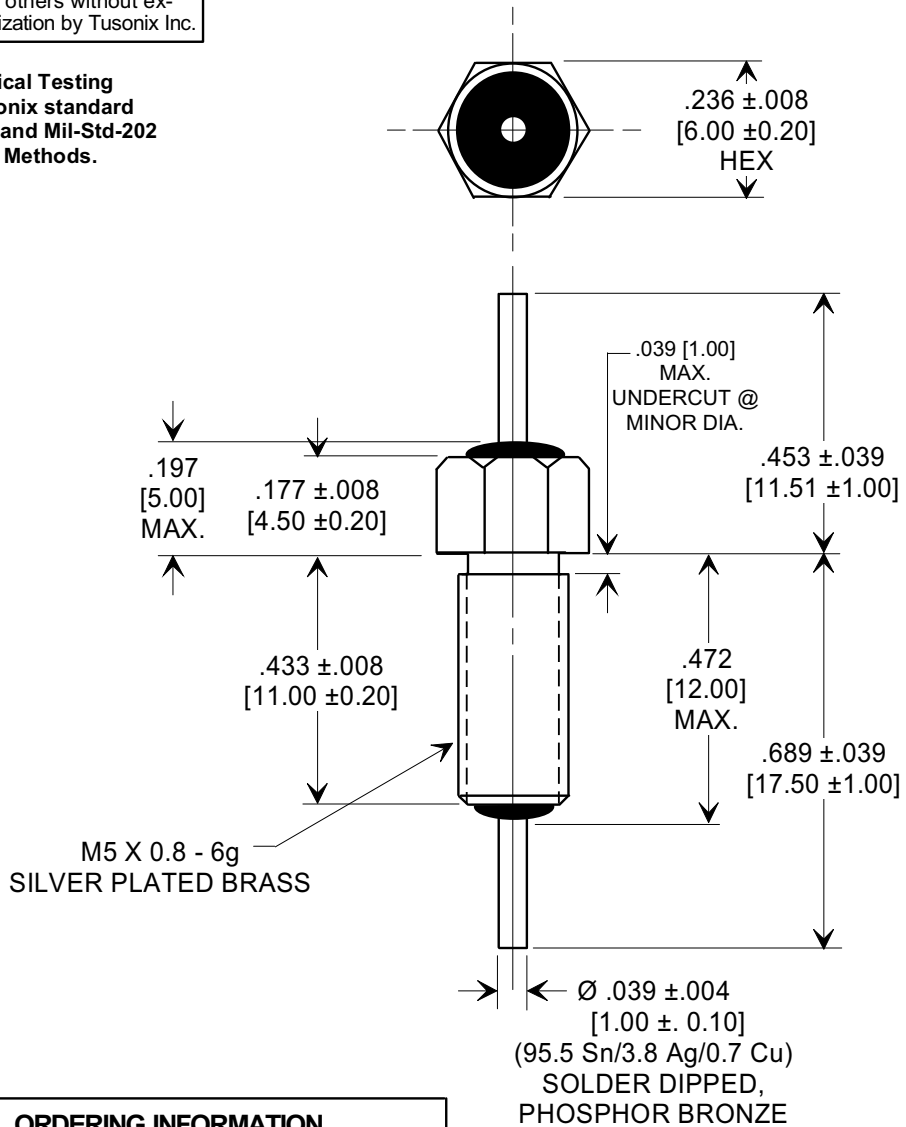

- NOTES:**
1. TUSONIX LF PART IS RoHS COMPLIANT.
  2. NO MOUNTING HARDWARE SUPPLIED.
  3. TUSONIX TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON HEX, GREEN INK.
  4. MOUNTING TORQUE: 3.5 LB IN. [0.395 N-M] MAX.

ORDERING INFORMATION	
TUSONIX STYLE	2499
VALUE	5000 pF
VALUE TOL.	+80% -20%
TEMP. COEF.	X7W
RATING	500VDC @ +85°C
OPERATING RANGE	-55°C TO +125°C
CURRENT	10 A
D.F. MAX.	2.5 %
DIELECTRIC WITHSTANDING	500 VAC, 60 SEC. 1000 VDC 1-5 SEC.

X-2015 Rev-0 REVISION RECORD Original Release <b>ECO-2603</b>	<b>A</b>	<b>--TOLERANCES--</b> Unless Otherwise Specified	<b>Title</b> <b>BUSHING TYPE</b> <b>FEED THRU</b> <b>CAPACITOR</b>		
					<b>DECIMAL ± NOTED</b>
			<b>ANGLES ±</b>	<b>Drawn</b> L.E. 01-17-12	<b>Scale</b> 3 X
			 <b>TUCSON, ARIZONA</b>	<b>Approved</b> R.L. 01-17-12 <b>A 2499-540-X7W0-502Z</b>	