

## Sensor/Actuator cable - SAC-3P-M12MS/1,0-PUR/BI-1L-Z - 1438613

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 3-position, PUR halogen-free, Black-gray RAL 7021, Plug straight M12, A-coded, on Valve connector BI (11 mm), with 1 LED, connected with Z diode, Cable length: 1 m

The illustration shows the SPEEDCON version



### Key commercial data

Packing unit	1 1
Weight per Piece (excluding packing)	60.0 GRM
Custom tariff number	85444290
Country of origin	Poland

### Technical data

#### Dimensions

Length of cable	1 m
Stripping length of the free conductor end	50 mm

#### Ambient conditions

Degree of protection	IP65
	IP67

#### General

Rated current at 40°C	4 A
Rated voltage	24 V
Number of positions	3
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Status display	1 LED
Protective circuit/component	Z diode

## Sensor/Actuator cable - SAC-3P-M12MS/1,0-PUR/BI-1L-Z - 1438613

### Technical data

#### General

Surge voltage category	III
Pollution degree	3
Insertion/withdrawal cycles	≥ 100

#### Material

Inflammability class according to UL 94	HB
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU
Valve plug contact material	CuSn
Valve plug contact surface material	Sn
Valve plug contact insert material	PA 66
Material housing valve plug	TPU
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	TPU (Seal molded)

#### Cable

Cable type	PUR halogen-free black
Conductor cross section	0.5 mm <sup>2</sup>
AWG signal line	20
Conductor structure signal line	28x 0.15 mm
Wire colors	Black 1, black 2, green/yellow
Overall twist	3 concentrically twisted wires
External sheath, color	Black-gray RAL 7021
External cable diameter	4.50 mm
Outer sheath, material	PUR
Conductor material	Bare Cu litz wires

### Classifications

#### eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801

# Sensor/Actuator cable - SAC-3P-M12MS/1,0-PUR/BI-1L-Z - 1438613

## Classifications

eCl@ss

eCl@ss 8.0	27061801
------------	----------

## ETIM

ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

## UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

## Accessories

Accessories

Mounting material


Screw - SAC-V-SCREW-M3-29 KNURL - 1403779



Fillister head screw with plastic knurl, M3 x 40


## Drawings

Schematic diagram



Pin assignment M12 plug, 3-pos., valve connector


Cable cross section



PUR halogen-free black [PUR]


# Sensor/Actuator cable - SAC-3P-M12MS/1,0-PUR/BI-1L-Z - 1438613

Dimensioned drawing




Valve connector, type BI

Dimensioned drawing




Valve connector, type BI, side view

Dimensioned drawing

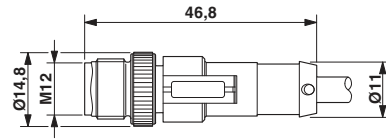

M12 x 1 plug, straight

Circuit diagram

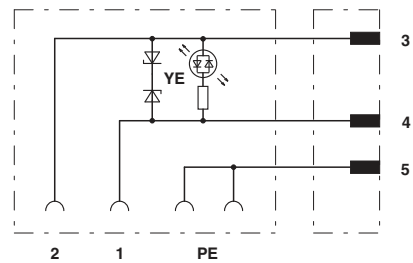

Contact assignment of M12 plug and valve connector