


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

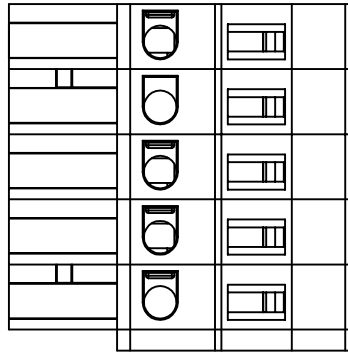



**Material**

- Female contact: PhBZz Tin Plated
- Spring Clamp: Stainless Steel
- Terminal housing (with hook): Thermoplastic (UL94V-0)
- Terminal housing (with pillar): Thermoplastic (UL94V-0)
- Terminal cover: Thermoplastic (UL94V-0)

**Electrical**

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
  - Solid wire(AWG): 12-28
  - Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety approval: us

RoHS Compliant

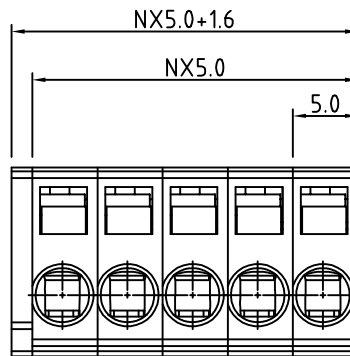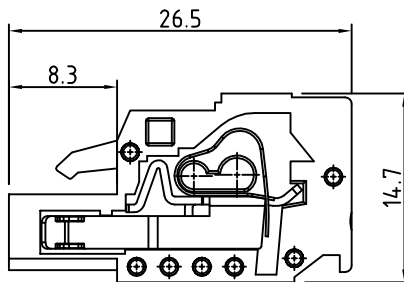

N=Number of contacts

PART NUMBER:

**OSTHIXX0050**

- |              |                     |
|--------------|---------------------|
| No. of Poles | COLOR:              |
| 02: 2 Poles  | 0: Black            |
| 03: 3 Poles  | 5: Green (Standard) |
| ... ..       | 6: Blue             |
| 24 24 Poles  | 8: Grey             |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTHI -5.0 Series with Hook			
PART NO.		OSTHIXX0050		DWG NO.	OSTHIXX0050.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Marvin 2006.11.01	Marvin 2006.11.01		X. ±0.50
					X.X ±0.30
					X.XX ±0.10
				SHEET: 01/01	REV.: E