


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
GP	00		B	REVISED PER ECO-14-011808	12AUG2014	AP
						SB

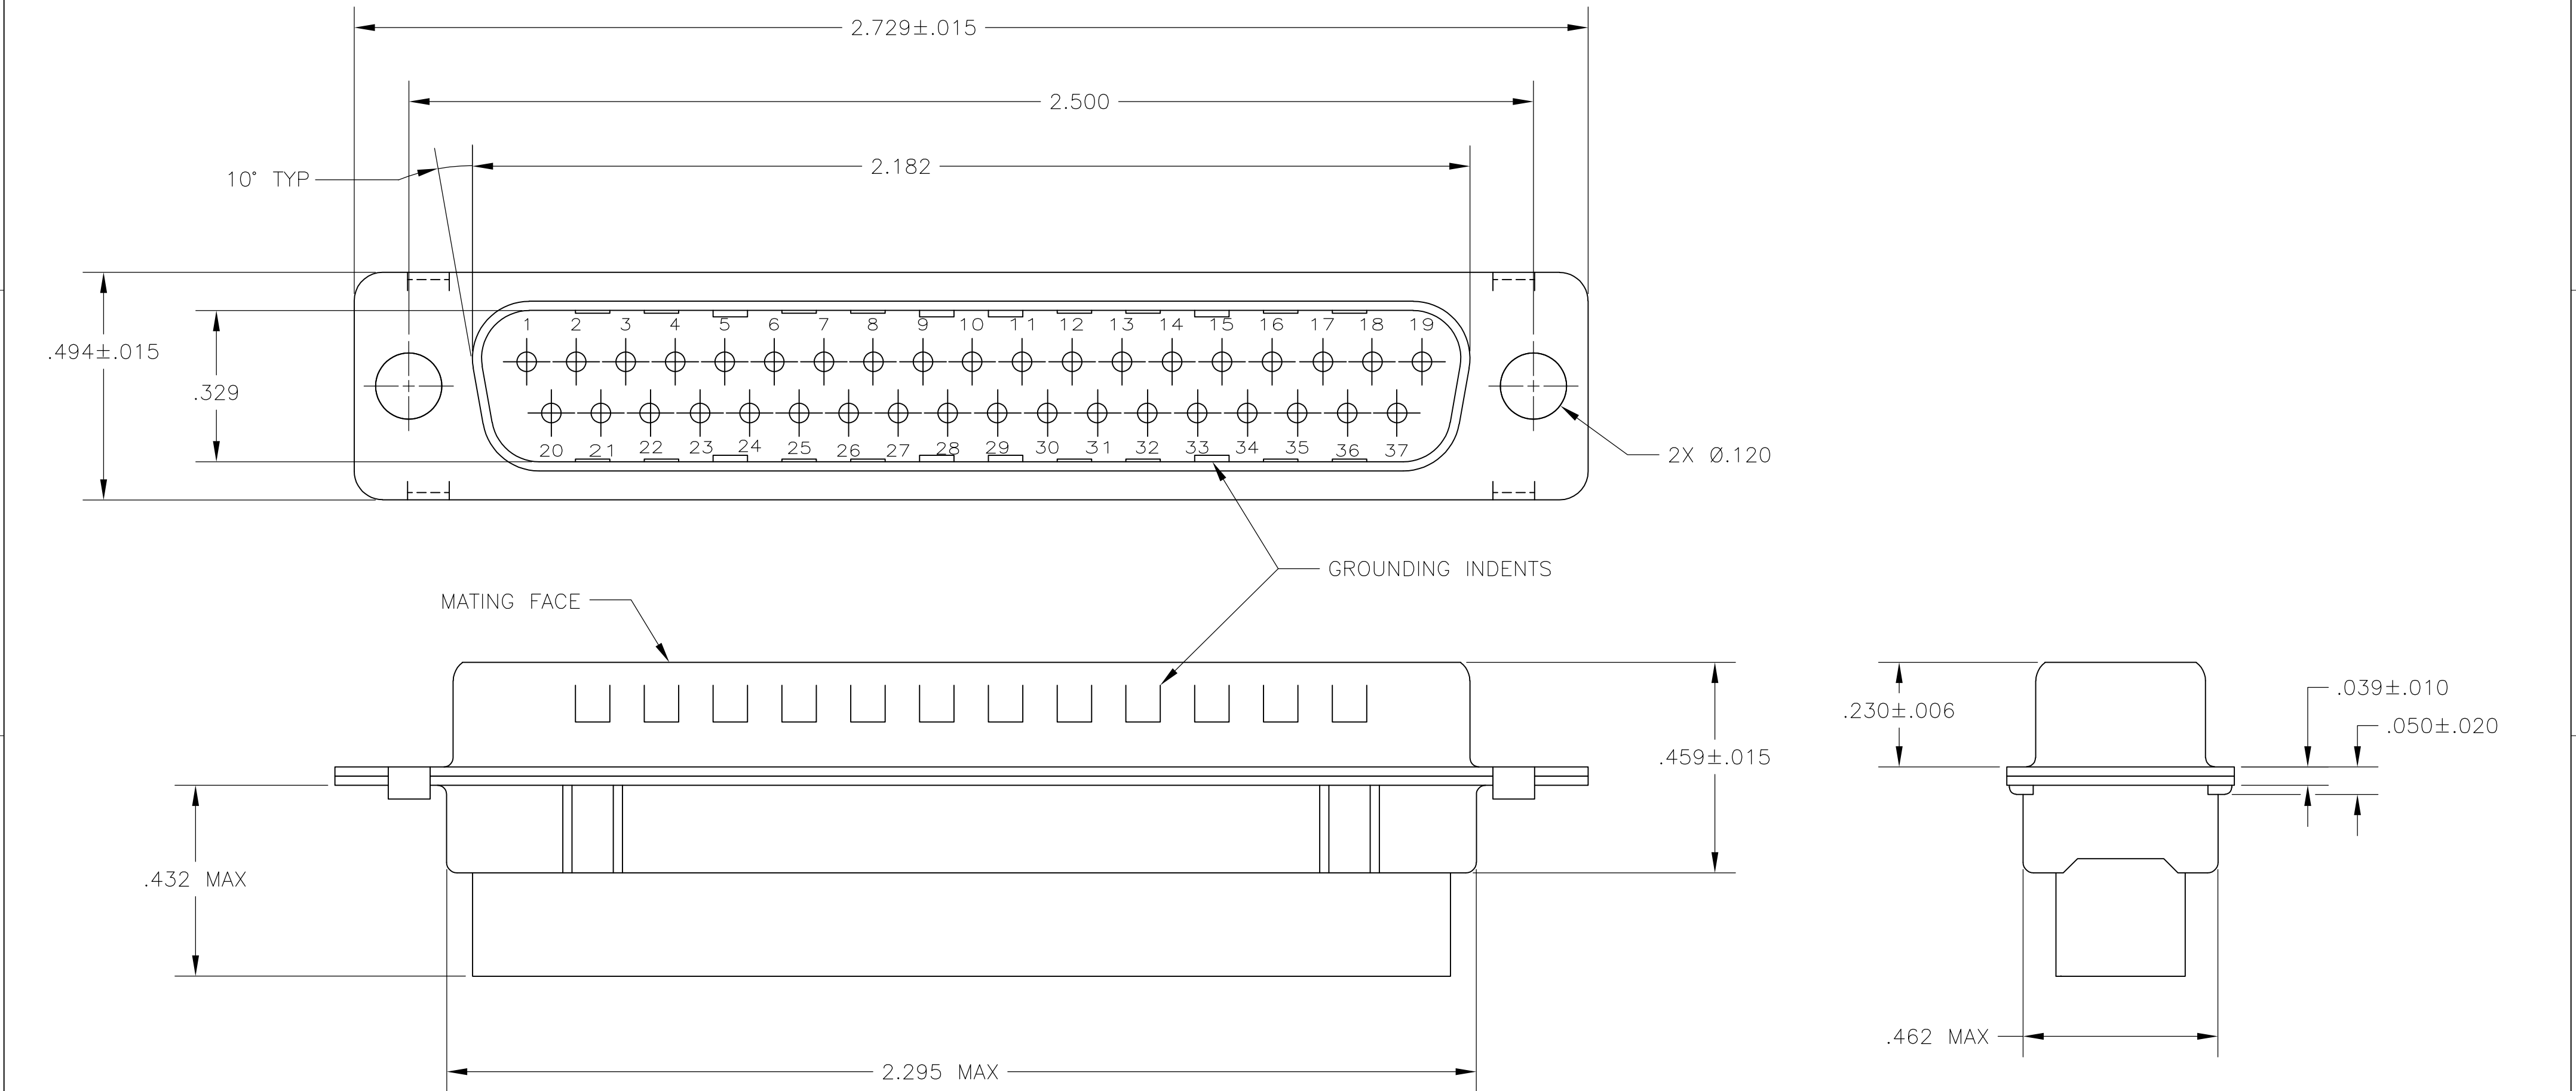

- 1
- CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 2
- CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- 3
- MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK.
- 4
- SHELL MATERIAL: STEEL PER ASTM A109.
- 5
- SHELL FINISH: TIN PLATE OVER COPPER UNDERPLATE.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

SEE NOTES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± 0° 30'

FINISH

SEE NOTES

DWN
C. VALENTINE
18NOV2009

CHK
C. ROHDE
18NOV2009

APVD
C. ROHDE
18NOV2009

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

PLUG ASSEMBLY, SIZE 4, 37 POSN,
HDP-20, AMPLIMITE
FOR SHIELDING HARDWARE

SIZE

A2

CAGE CODE

00779

DRAWING NO

C-747568

RESTRICTED TO

-

SCALE

NTS

SHEET

1 of 1

REV

B