


## CABLE BREAKOUT BOOTS, THREE ENTRY MODIFICATIONS

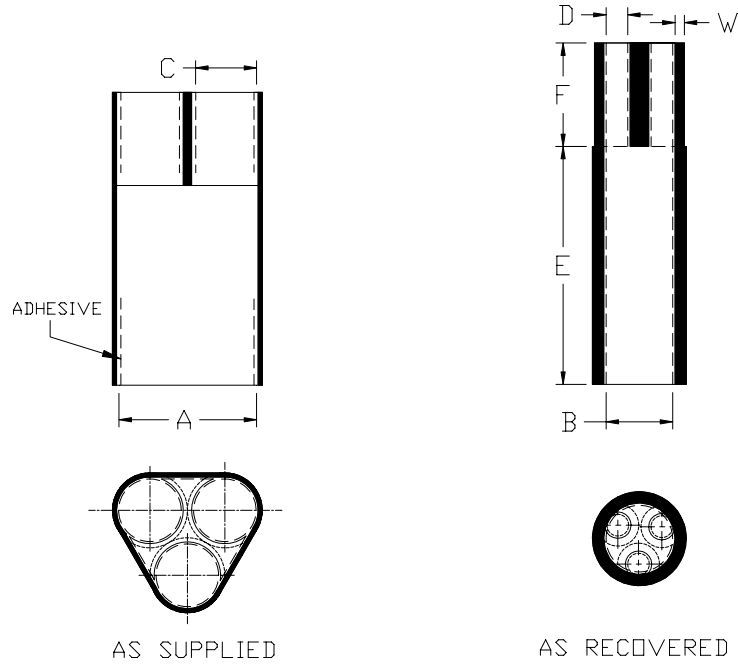

### Table of Dimensions, inch (mm):

PART NUMBER (SEE NOTE*)	BODY ID		LEG ID		LENGTH RECOVERED MIN		REC'D. WALL THICKNESS REF
	EXP. (A), MIN	REC'D. (B), MAX	EXP. (C), MIN	REC'D. (D), MAX	(E), BODY	(F), LEG	
T42-100FR-01	1.70 (43)	0.90 (23)	0.95 (24)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)
T42-100FR-02	1.70 (43)	0.90 (23)	0.95 (24)	0.30 (8)	1.2 (30)	1.2 (30)	0.12 (3.0)
T42-100FR-G02	1.70 (43)	0.90 (23)	0.95 (24)	0.30 (8)	1.2 (30)	1.2 (30)	0.12 (3.0)
T42-100FR/ ROUND-BASE	2.10 (53)	0.90 (23)	0.82 (21)	0.30 (8)	2.3 (58)	1.2 (30)	0.12 (3.0)

**Note\*:** Add "NA" to the end of Part Number if no adhesive is required

**Material:** Heat shrinkable boot material in accordance with -3 polyolefin

**Factory applied sealant:** Factory applied hot melt adhesive is standard.

### CUSTOMER DRAWING

		Raychem Molded Parts 305 Constitution Drive, Menlo Park, CA 94025		TITLE:			
				<b>CABLE BREAKOUT BOOT, THREE ENTRY MODIFICATIONS</b>			
Unless otherwise specified dimensions are in inches. [Metric dimensions are shown in brackets]				DOCUMENT NO.:			
				<b>TXXX-XXXFR-XX</b>			
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.				REV:			
				D			
REVISED BY: U. Nguyen		CAGE CODE: 06090		Org. Date: 5/7/07		SCALE:	
						None	
FILE : TXXX-XXXFR-XX.doc		SIZE A		DATE:		SHEET:	
				October 6, 2008		1 of 1	

© 2007-2008 Tyco Electronics Corporation. All rights reserved

If this document is printed it becomes uncontrolled. Check for the latest revision.