

Panel feed-through terminal block - TW 50/ 1-CL - 1708744

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel feed-through terminal block, Connection method: T-LOX spring connection, Load current : 150 A, Cross section: 10 mm² - 50 mm², Width: 20 mm, Color: gray



Key Commercial Data

Packing unit	1 pc
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Number of levels	1
Number of connections	2
Nominal cross section	50 mm ²
Color	gray
Insulating material	PA
Inflammability class according to UL 94	V0
Insulating material group	I
Nominal current I _N	150 A
Nominal voltage U _N	1000 V
Number of positions	1

Dimensions

Width	20 mm
Plate thickness	1 mm ... 5 mm

Connection data

Connection side	Level 1 ext. 1
Connection method	T-LOX spring connection

Panel feed-through terminal block - TW 50/ 1-CL - 1708744

Technical data

Connection data

Conductor cross section solid min.	10 mm ²
Conductor cross section solid max.	50 mm ²
Conductor cross section flexible min.	16 mm ²
Conductor cross section flexible max.	50 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	10 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	50 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	10 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	50 mm ²

Classifications

eCl@ss


eCl@ss 5.1	27141134
eCl@ss 6.0	27141134

ETIM

ETIM 5.0	EC001283
----------	----------

Drawings

Drilling diagram

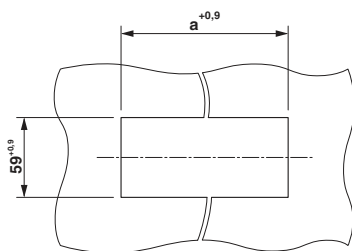

Dimension a = 29 mm

Diagram

