

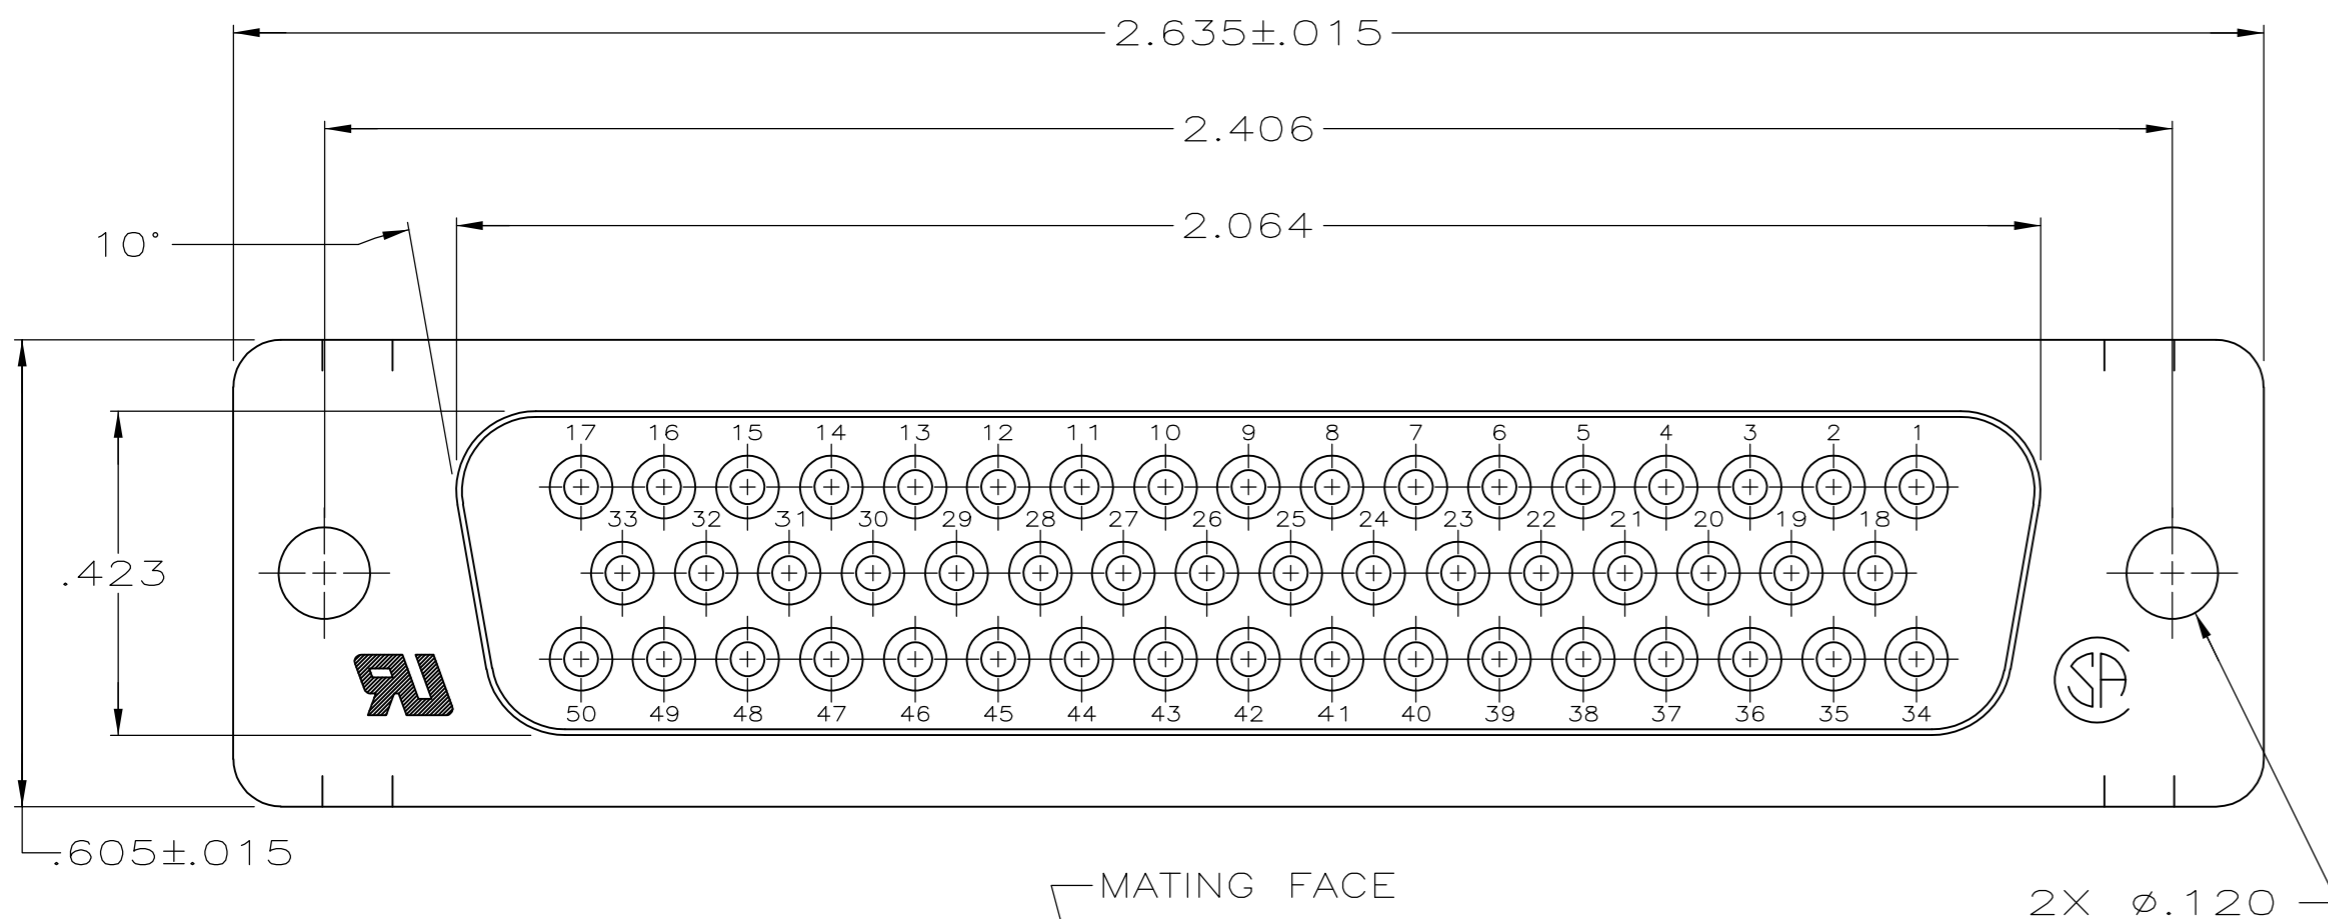
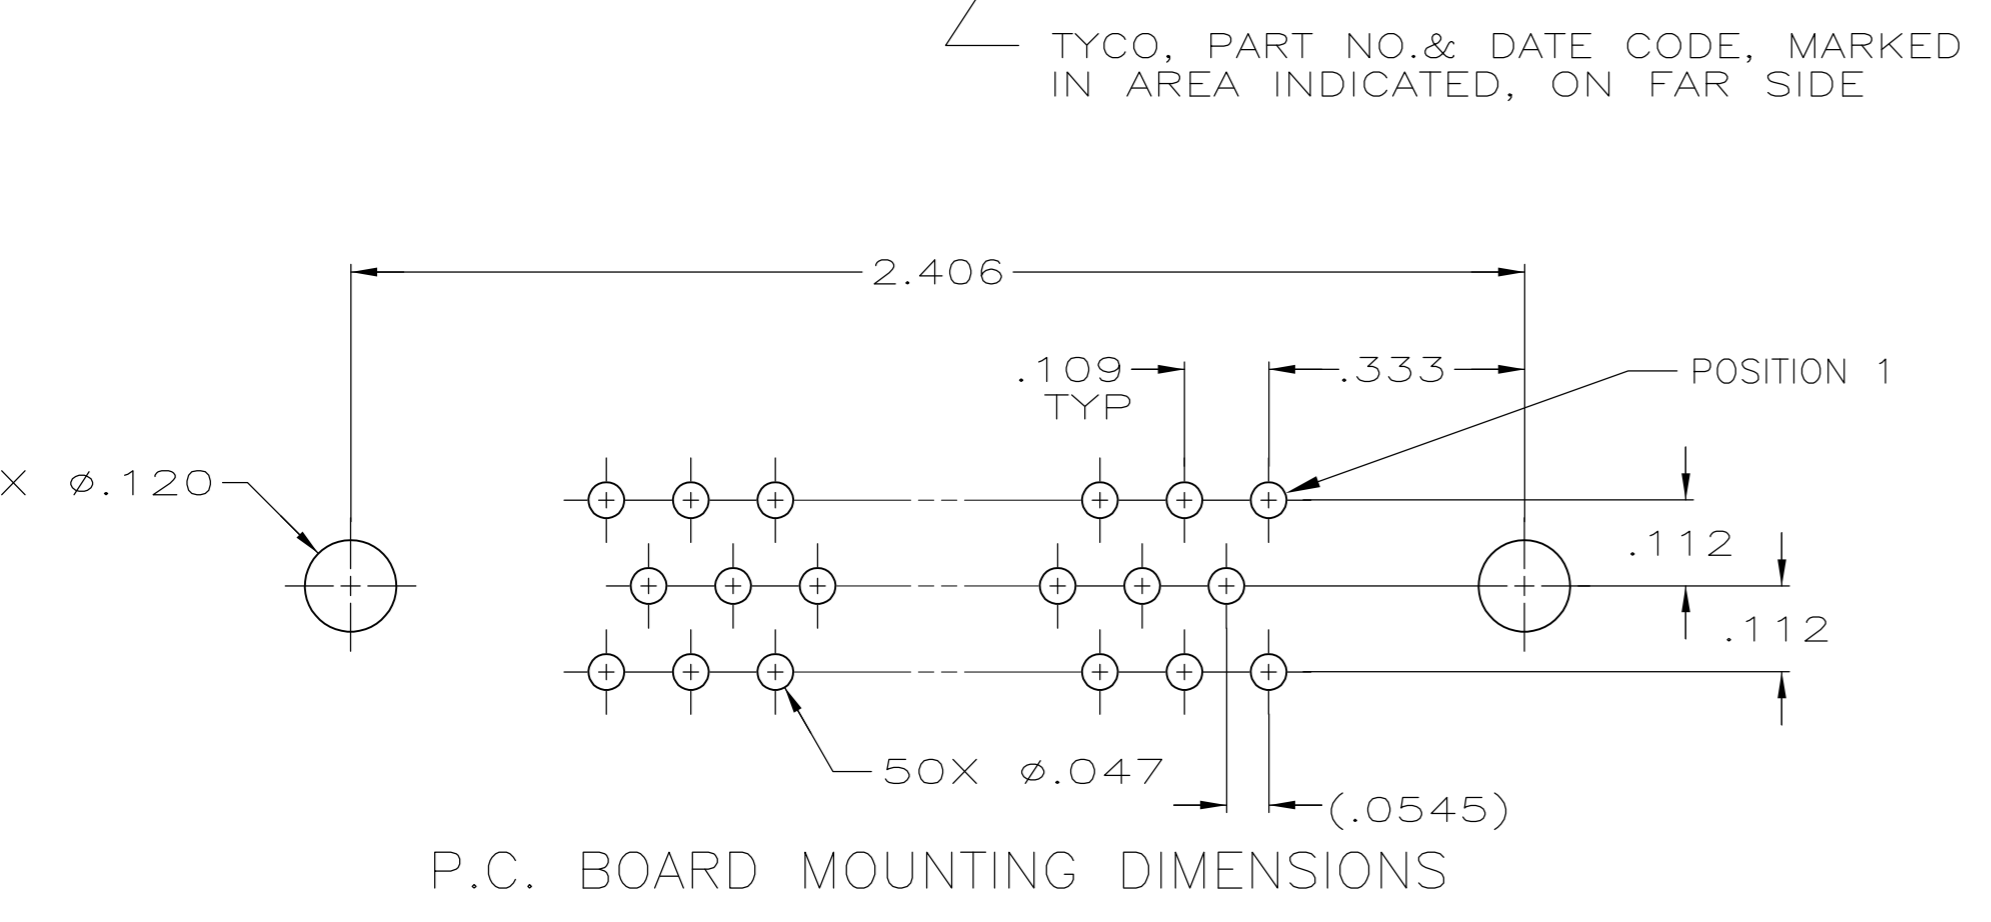


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2005 By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
GP	00						
	D	REVISED PER ECO-14-011808	11AUG2014	AP	SB		

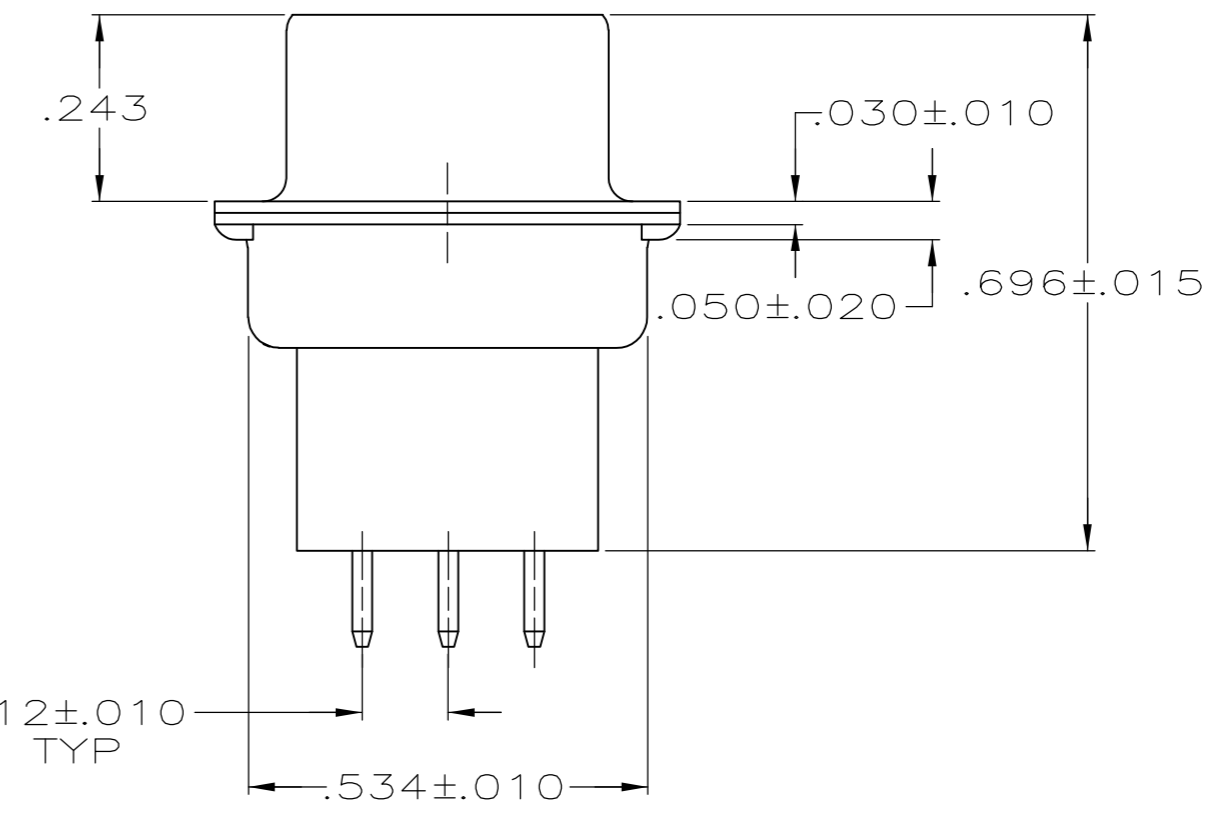

- 1 MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK.
SHELLS: CARBON STEEL
CONTACTS: PHOS. BRONZE
- 2 SHELLS: .000200 MIN TIN OVER .000100 MIN COPPER.
CONTACTS: .000030 MIN GOLD ON MATING END, .000100 MIN TIN ON SOLDER END, BOTH OVER .000050 MIN NICKEL
-OR-
GOLD FLASH OVER PALLADIUM-NICKEL .000030 MIN TOTAL ON MATING END, .000100 MIN TIN ON SOLDER END, BOTH OVER .000050 MIN NICKEL.

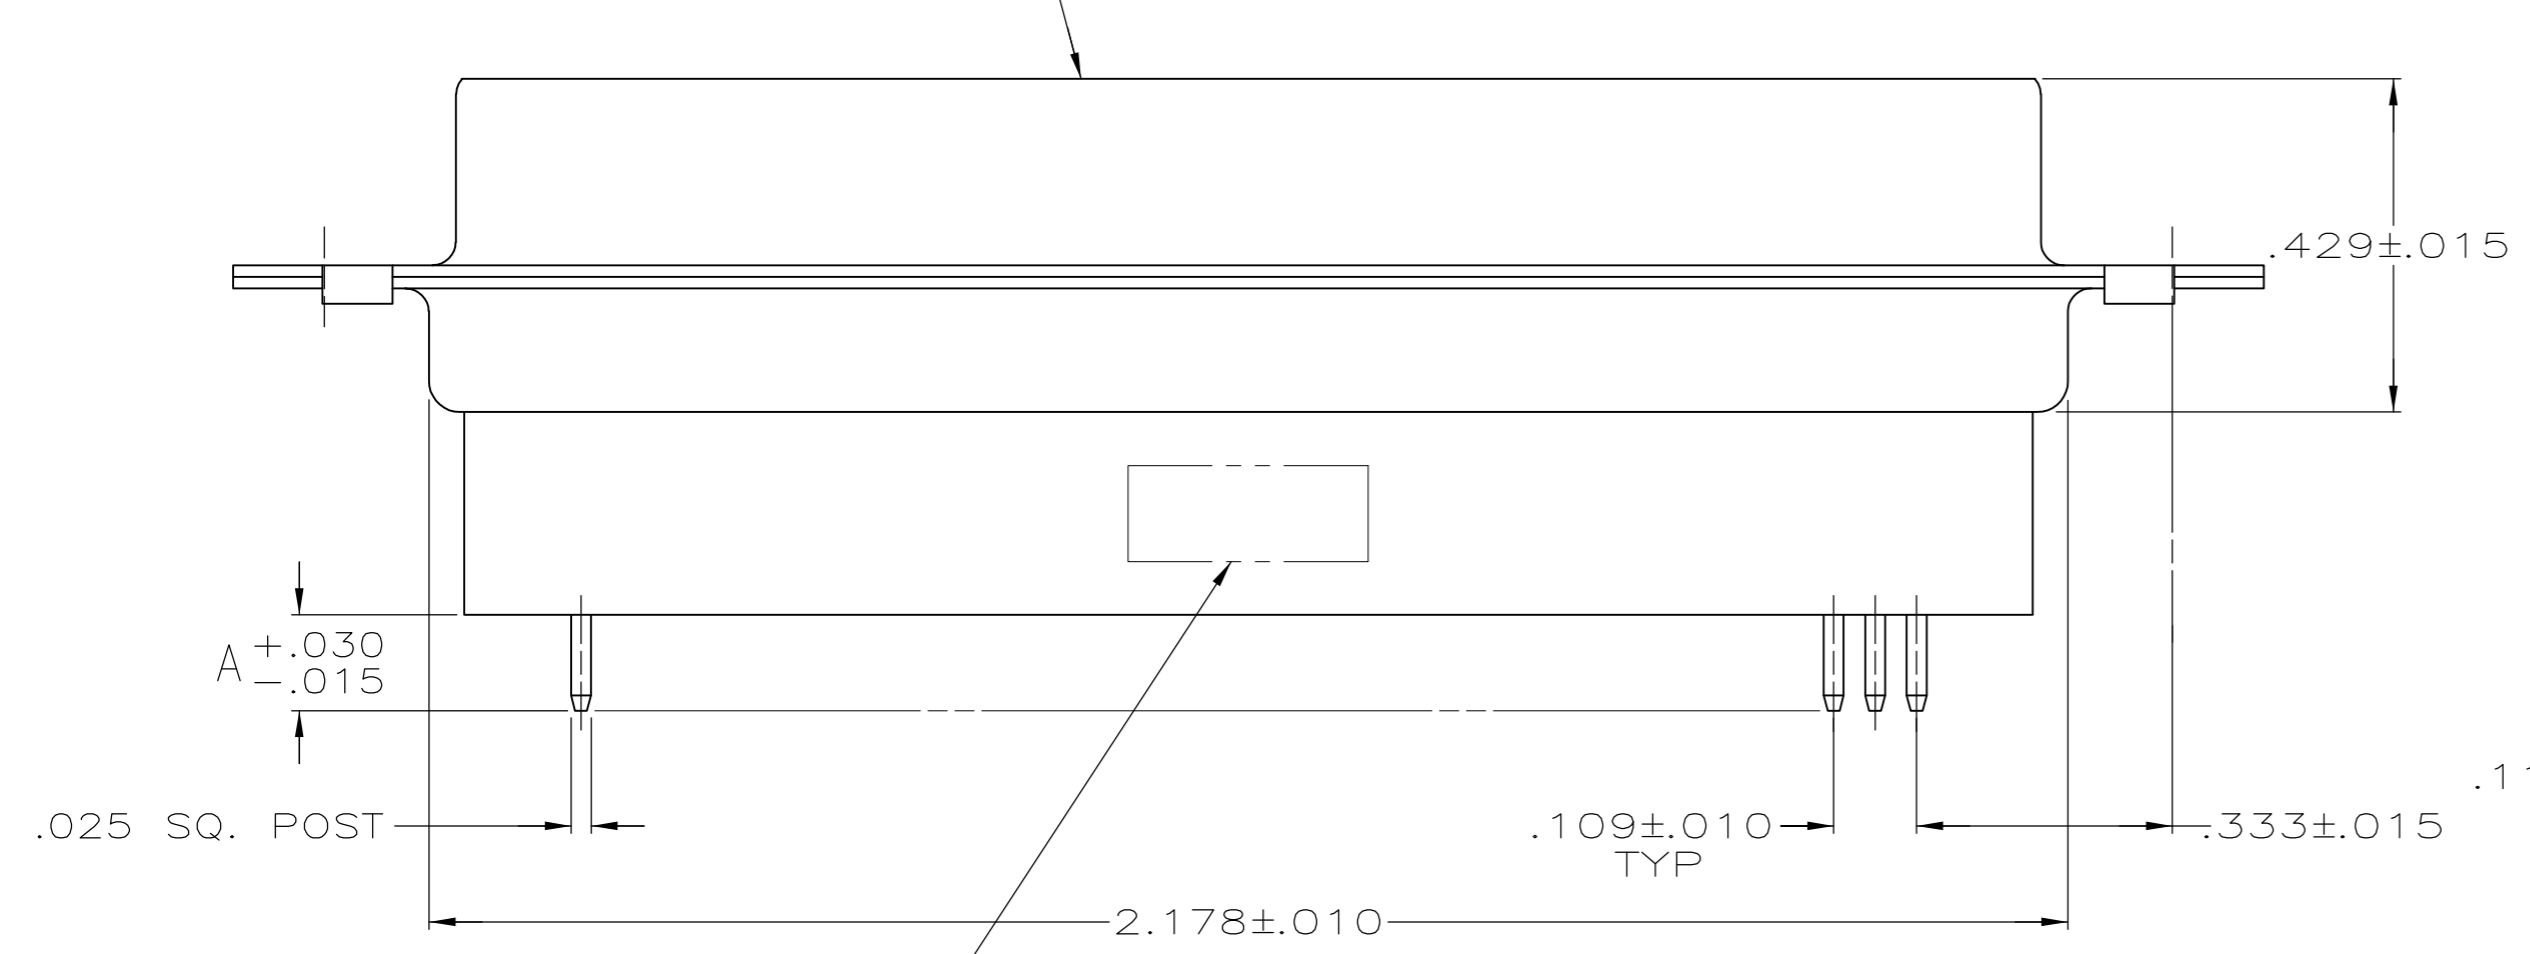

.188	5745191-7
.125	5745191-1
A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15SEPT05	 TE Connectivity			
DIMENSIONS: INCHES		CHK	15SEPT05		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	15SEPT05		PRODUCT SPEC		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± - FINISH ± -		M. WALMSLEY			APPLICATION SPEC		
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1		-		A2	00779	C=5745191	-
2		CUSTOMER DRAWING		SCALE	SHEET	REV	
				NTS	1 of 1	D	