


# E11686



## Bulk cable

CABLE/100M/ PUR/4X0,34/BK

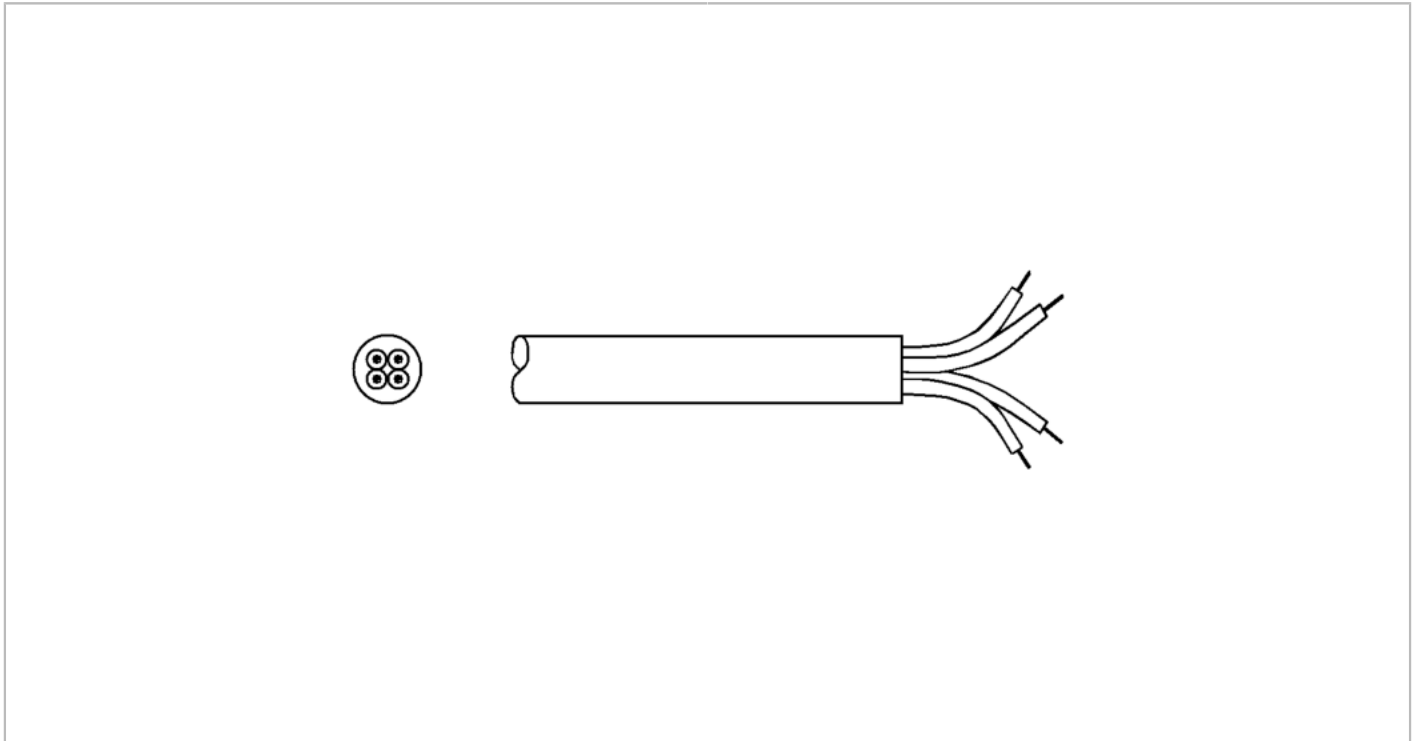

### Application

Special feature Halogen-free; Drag chain suitability

### Operating conditions

Ambient temperature [°C] -40...90

### Mechanical data

Weight [g]	3127
Drag chain suitability	yes
Drag chain suitability	bending radius for flexible use min. 10 x cable diameter
	travel speed max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup>
	bending cycles > 5 Mio.
	torsional strain ± 180 °/m

### Remarks

Pack quantity 1 pcs.

### Electrical connection

Cable: 100 m, PUR, Halogen-free, black, Ø 4.9 mm; 4 x 0.34 mm<sup>2</sup>, PP