


**GU160X16-800B**

**SIMPLIFIED DATASHEET**

**Features**

160x16 dot size VFD module.

**Physical dimension**

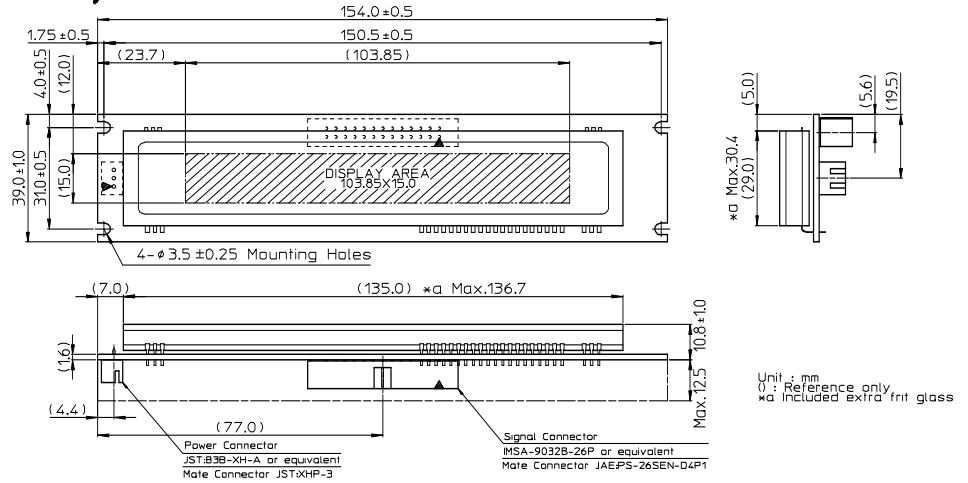

**Specifications**

**Electrical Ratings**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power Supply Voltage	VCC	4.75	5.00	5.25	VDC	-

**Electrical Characteristics**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Logic Input Voltage						
H	VIH	4.0	-	-	VDC	I <sub>IH</sub> =2 μA
L	VIL	-	-	1.0	VDC	I <sub>IL</sub> =-600 μA
Logic Output Voltage						
H	VOH	4.7	-	-	VDC	I <sub>OH</sub> =-300 μA
L	VOL	-	-	0.3	VDC	I <sub>OL</sub> =300 μA
Reset Input Voltage						
H	VRH	4.0	-	-	VDC	I <sub>RH</sub> =5 μA
L	VRL	-	-	0.6	VDC	I <sub>RL</sub> =-600 μA
Power Supply Current	ICC	-	550	700	mA	All dots ON
		-	450	600	mA	All dots OFF
Power Consumption		-	2.75	3.5	W	All dots ON

**Optical Characteristics**

Parameter	Value
Luminance	350 cd/m <sup>2</sup> Min.
Color of illumination	Green (Blue-Green)

**Environmental Conditions**

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	539m/s <sup>2</sup> (55G) 10ms

**Physical Specifications**

Parameter	Value
Number of Dots	2,560 (160 x 16)
Display Area	103.85 mm x 15.0 mm
Dot Size (X x Y)	0.50 mm x 0.75 mm
Dot Pitch (X x Y)	0.65 mm x 0.95 mm

**Interface**

Parallel (CMOS), Synchronous Serial (CMOS)

**Pin Assignment (Signal)**

Pin No.	Description			Pin No.	Description
	Parallel #1	Parallel #2	Serial		All
1	D7	D7	NC	2	GND
3	D6	D6	NC	4	GND
5	D5	D5	NC	6	GND
7	D4	D4	NC	8	GND
9	D3	D3	NC	10	GND
11	D2	D2	NC	12	GND
13	D1	D1	TXD	14	GND
15	D0	D0	RXD	16	GND
17	WR	R/W	NC	18	GND
19	C/D	C/D	C/D	20	GND
21	RD	ENCK	SCK	22	GND
23	CSS	CSS	CSS	24	GND
25	FRP	FRP	FRP	26	RESET

**(Power)**

Pin No.	Signal
1	VCC
2	Test
3	GND

**Built-in Character**

None

**Functions**

Parameter	Value
High-speed interface	
Control command	
2 Graphic Layers support	
Scroll function	
AND/OR/EXOR	
etc.	



Leaflet contents, and specifications and external appearance of products, may change without notice.

Please confirm product details in the specification.

(C)Copyright NORITAKEITRON CORP.