
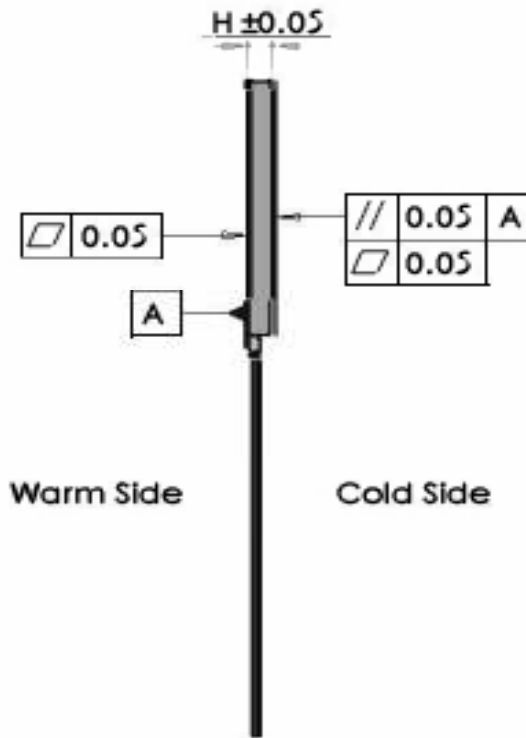


# APM-071-18MA2

## Micro Peltier Cooler Module, 9.2W

### Data sheet

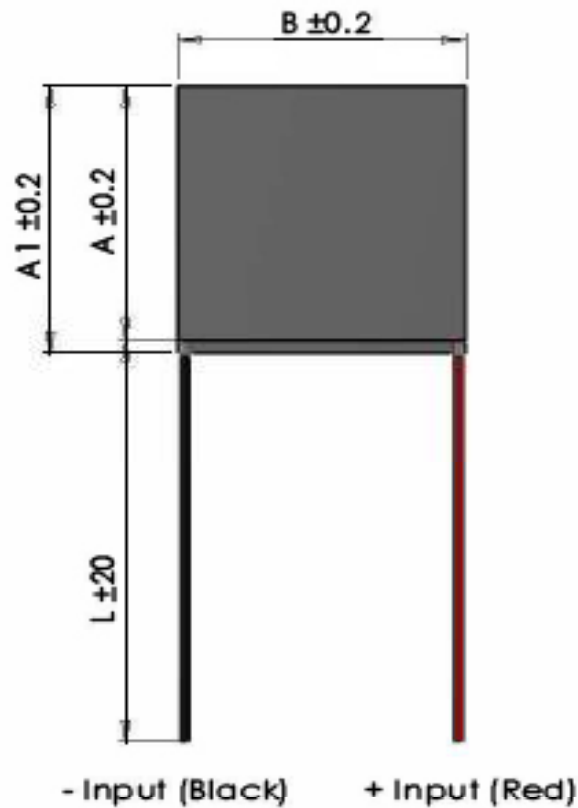

$I_{max}$	[A]	1.8
$V_{max}$	[Vdc]	8
$P_c \text{ max}$	[W]	9.2
$\Delta T_{max}$	[°C]	64
Max hot side temp.	[°C]	90
A	[mm]	13.2
A1	[mm]	
B	[mm]	13.2
H	[mm]	2.2
Wire	AWG	n/a

(At hot side temperature  $T_h = 25^\circ\text{C} / 298\text{K}$ , under dry  $\text{N}_2$ ).

$P_c \text{ max}$  = Cooling power at  $\Delta T = 0$  and  $I = I_{max}$ .

$\Delta T_{max}$  = Temperature difference at  $I = I_{max}$  and  $P_c = 0$ .

Max hot side temperature given for best long term performance.

Max mounting pressure: 1.5MPa.

Unsealed






Wires: PVC UL1569, 300V, 105°C



# APM-071-18MA2

## Micro Peltier Cooler Module, 9.2W






Data sheet - At hot side temperature 25°C

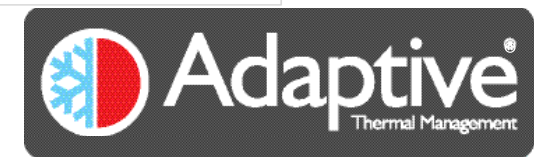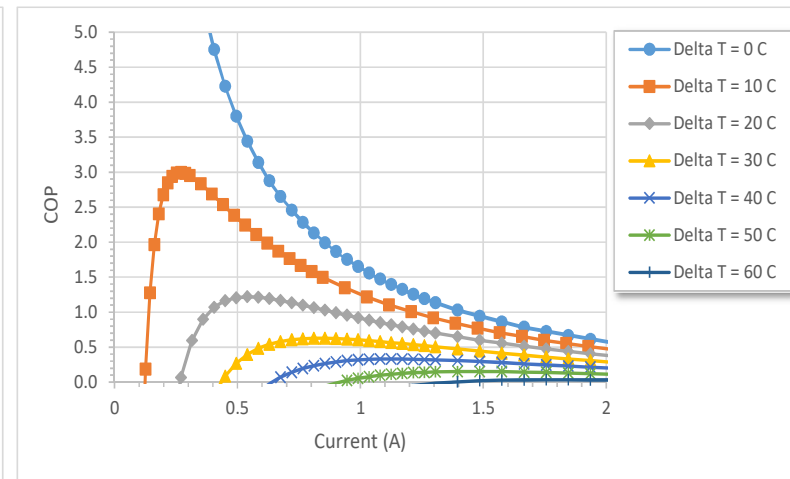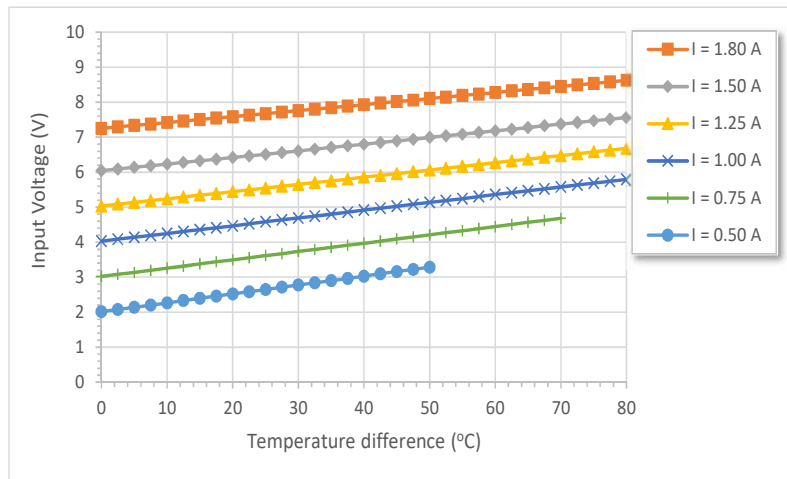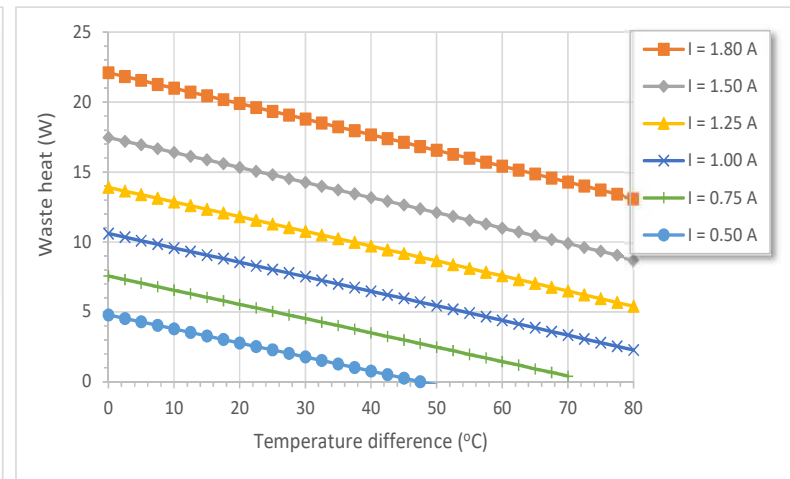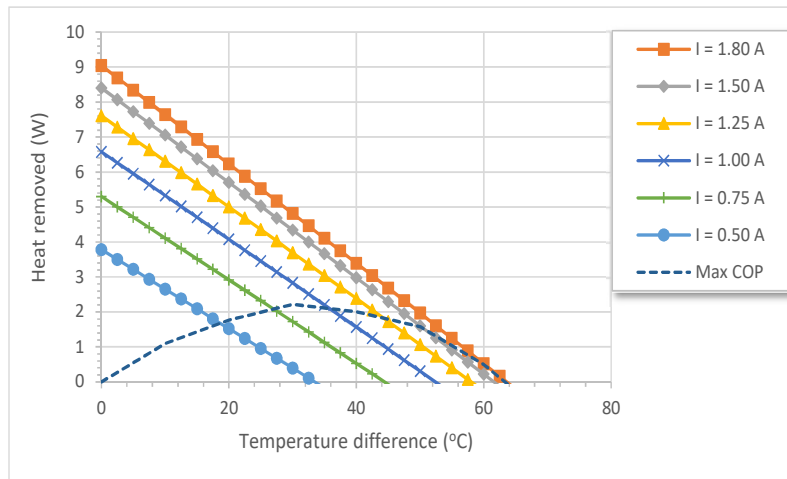

# APM-071-18MA2

## Micro Peltier Cooler Module, 9.2W

Data sheet - At hot side temperature 50°C

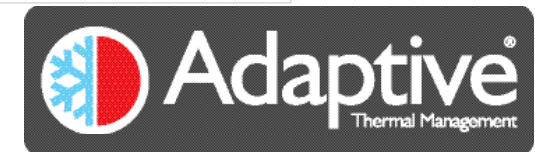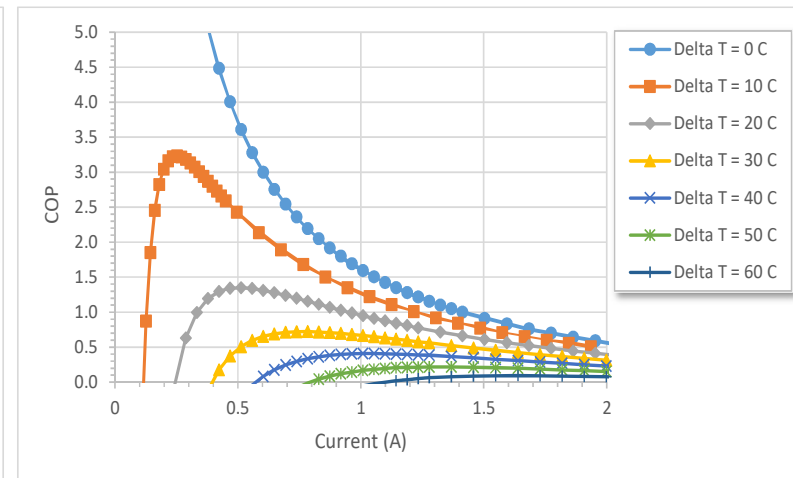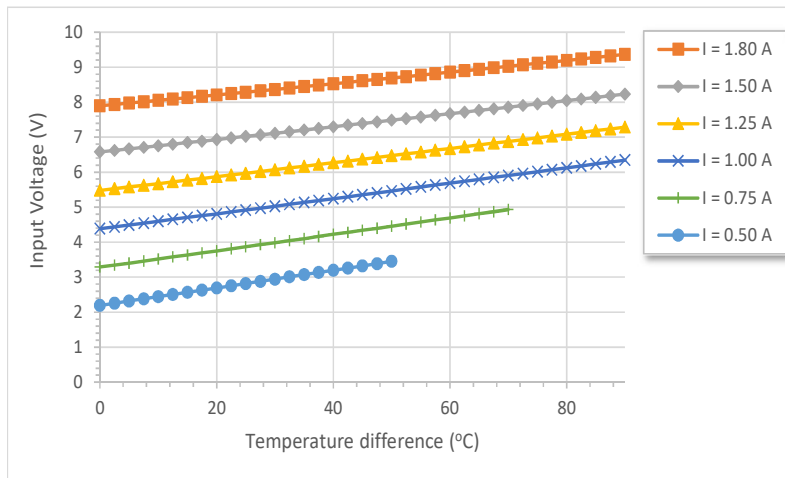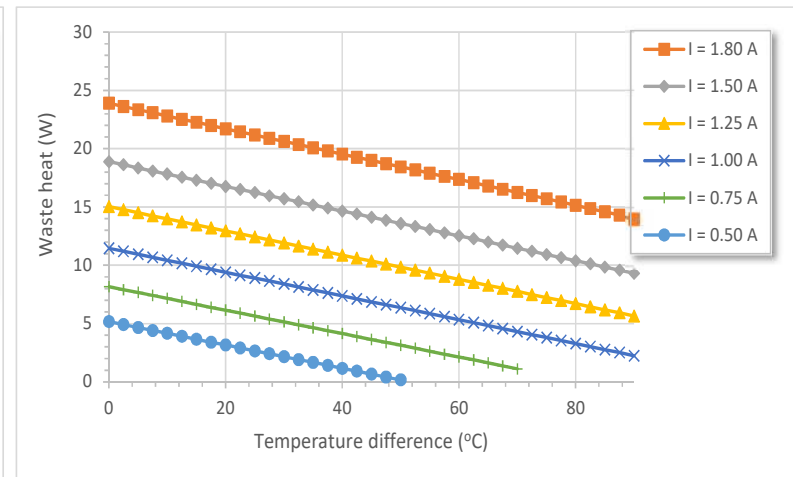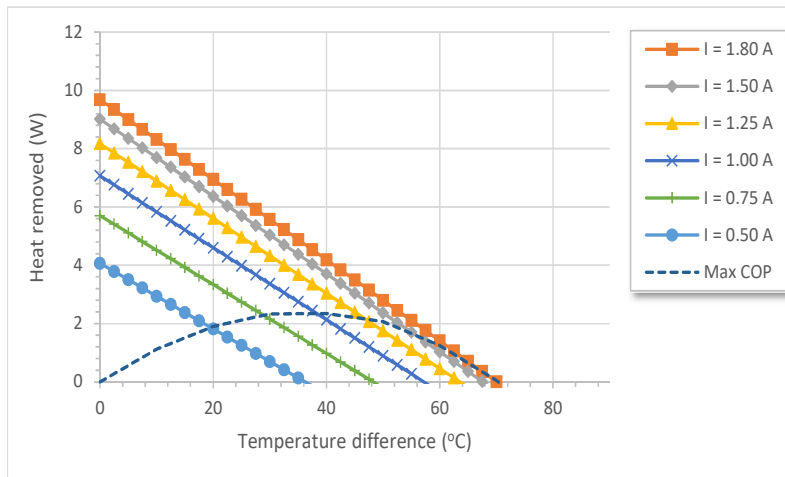

# APM-071-18MA2

## Micro Peltier Cooler Module, 9.2W

Data sheet - At hot side temperature 75°C

