

Customer Information Sheet

DRAWING No.: M50-320XX45

SHEET 2 OF 2


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

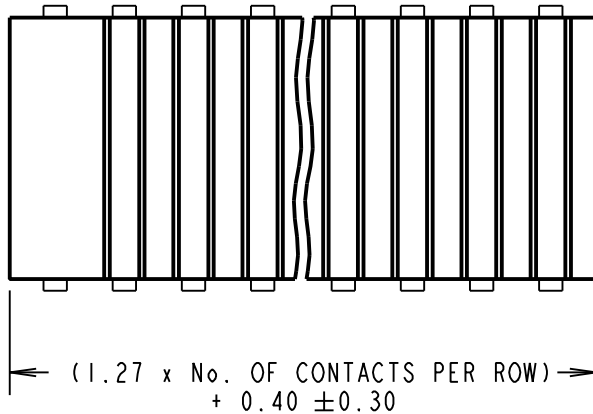


ORDER CODE:

M50-320XX45

No. OF CONTACTS PER ROW:
02 TO 50

FINISH:
45 = 0.25µ GOLD ALL OVER

OBSOLETE
All other size/finish
combinations not listed above

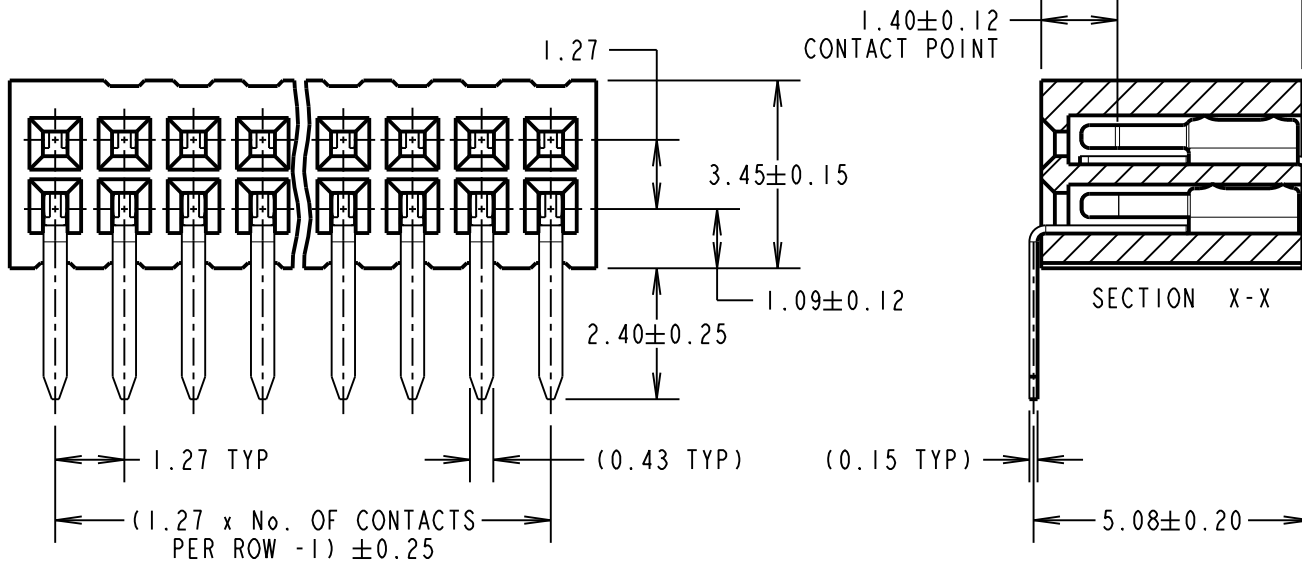

SPECIFICATIONS:

MATERIAL:

MOULDING = NYLON 9T UL94V-0, BLACK
CONTACT = PHOSPHOR BRONZE

FINISH:

CONTACT = 0.25µ GOLD ALL OVER

ELECTRICAL:

CURRENT RATING = 1A
DIELECTRIC VOLTAGE = 500V AC FOR ONE MINUTE
CONTACT RESISTANCE = 20mΩ MAX
INSULATION RESISTANCE = 1000MΩ MIN

MECHANICAL:

INSERTION FORCE = 0.98N MAX PER PIN
WITHDRAWAL FORCE = 0.12N MIN PER PIN
DURABILITY = 300 CYCLES MIN

ENVIRONMENTAL:

OPERATING TEMPERATURE = -40°C TO +105°C

PACKING:

TUBE

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C029XX (LATEST ISSUE)

Active products:

NOTES:

1. RECOMMENDED PCB HOLE SIZE = $\varnothing 0.70 \pm 0.05$ mm.

- M50-3200345
- M50-3200445
- M50-3200545
- M50-3200645
- M50-3200845
- M50-3200945
- M50-3201045
- M50-3201245
- M50-3201545
- M50-3202045

SB	9	18.03.13	11904
NAME	ISS.	DATE	C/NOTE
APPROVED:		S.BENNETT	
CHECKED:		S.FLOWER	
DRAWN:		J. ENRIGHT	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

1.27mm PITCH DIL
SIDE ENTRY SOCKET ASSY

DRAWING NUMBER:

M50-320XX45

SHT
2
OF 2