CUSTOMER PRINT

PART NUMBER: 18280-XPG-3XX

NOTES:

1. ALL PARTS TO BE BULK PACKED.

ASS'Y P/N	NO. OF CONTACT	GROMMET FOR CABLE O.D.
18280-2PG-311	2 POS.	.09-.14 [2.3-3.5mm]
18280-2PG-315		.15-.17 [3.8-4.3mm]
18280-2PG-318		.18-.20 [4.6-5.1mm]
18280-3PG-311	3 POS.	.09-.14 [2.3-3.5mm]
18280-3PG-315		.15-.17 [3.8-4.3mm]
18280-3PG-318		.18-.20 [4.6-5.1mm]



FACE VIEW
18280-2PG-3XX



FACE VIEW
18280-3PG-3XX

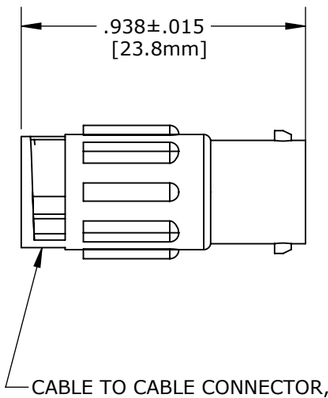

CABLE TO CABLE CONNECTOR, MALE
MAT'L: THERMOPLASTIC, BLACK
NO. OF CONTACT: SEE CHART



(2-3) #20 PIN CONTACTS
MAT'L: GOLD PLATED,
COPPER ALLOY

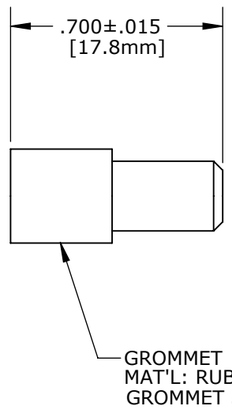

GROMMET
MAT'L: RUBBER, BLACK
GROMMET SIZE: SEE CHART

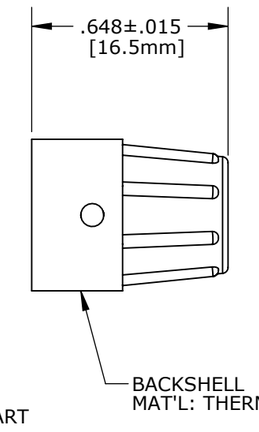

BACKSHELL
MAT'L: THERMOPLASTIC, BLACK

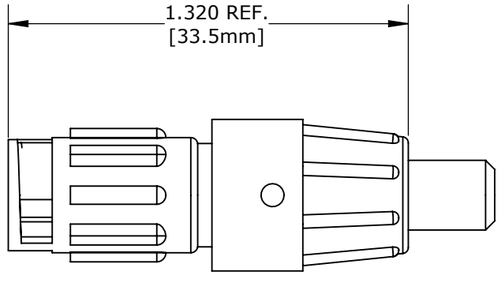

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

DIMENSIONS IN BRACKET [ ] ARE METRIC.

RoHS COMPLIANT

REV.	INIT.	DATE	DESCRIPTION
A	AN	05-15-13	DRAWING CREATED PER DOR 13-E149SL #18

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.

ALL UNITS ARE IN FEET, INCHES. FRACTION OF INCHES AND DECIMALS.

UNLESS OTHERWISE SPECIFIED TOLERANCES:
3 PLACE DECIMALS ±.010
ANGLES ±1°
FRACTIONS ±1/16

▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX

ORIG. DRAWN BY: AN DATE: 05-15-13

CHECKED BY:

APPROVED BY:

SCALE: NTS | SIZE: B | SHEET: 1 OF 1

FILE: 18280-XPG-3XX | DIRECTORY: SLW

conxall
601 E. WILDWOOD VILLA PARK, IL 60181

TITLE: CABLE TO CABLE CONN. KIT
(2-3) #20 PIN CONTACTS, CRIMP
MINI-CON-X

CUSTOMER: STANDARD PRODUCT

PART NUMBER: 18280-XPG-3XX | REV: A