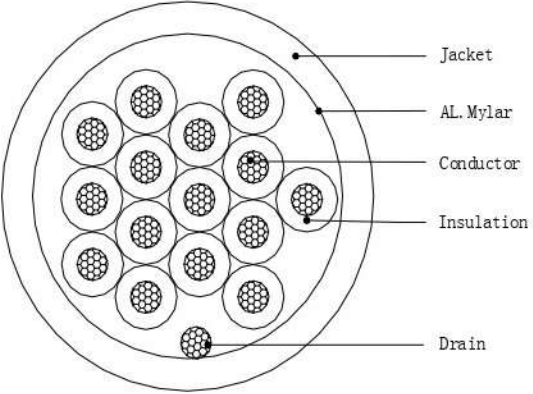


# CompuCableUSA

Providing Connectivity Solutions

specification		UL2464 26AWG*15C+D+AL. Mylar, OD:6.5mm Gray PVC HALF MATT			Picture	
Item		15C				
Conductor	AWG	26AWG				
	Material	Tinned copper				
	Cond. Size	7/0.16TC±0.008mm				
Insulation	Avg. Thick	0.23mm Ref			Note	1. Rating:TEMP 80°C:Voltage: 300V 2. ConductorResistance:AT20°C MAX, 26AWG:148.94 Ω /KM 3. Insulation Resistance:DC500V MIN 10MΩ/Km; 4. Dieleatric Strength :AC:500V/1minute;
	Material	SR-PVC				
	O. D	1.00±0.05mm				
	Color	1:Black 2:brown 3:red 4:orange 5:yellow 6:green 7:Blue 8:purple 9:gray 10:white 11:pink 12LIGHT GREEN 13. BLACK/WHITE 14. BROWN/WHITE 15. RED/WHITE				
intertwist	Drain	7/0.20TC±0.008mm Tinned copper			Rev	A/0:
	aluminum foil AL	25u*20mm >25% MIN				
Braid	Cond. Size	/			Customer	CompuCablePlusUSA
	Shield Coverage	/				
Jacket	Material Color	PVC N9C03016 VW-1/60P Gray (PT:430C)			Part.No:	BW-26AL-15G1K
	O. D	6.5±0.15mm			Part. No	
	Surface	HALF MATT			Rev:	A/0
Marking	E134689 AWM 2464 80°C 300V VW-1 (1") RoHS (1") RoHS2. 0 (1") REACH (1") COMPLIANT				Data:	
	height: 1.2MM	Color: blac	font:	C1-18 (1"):		