
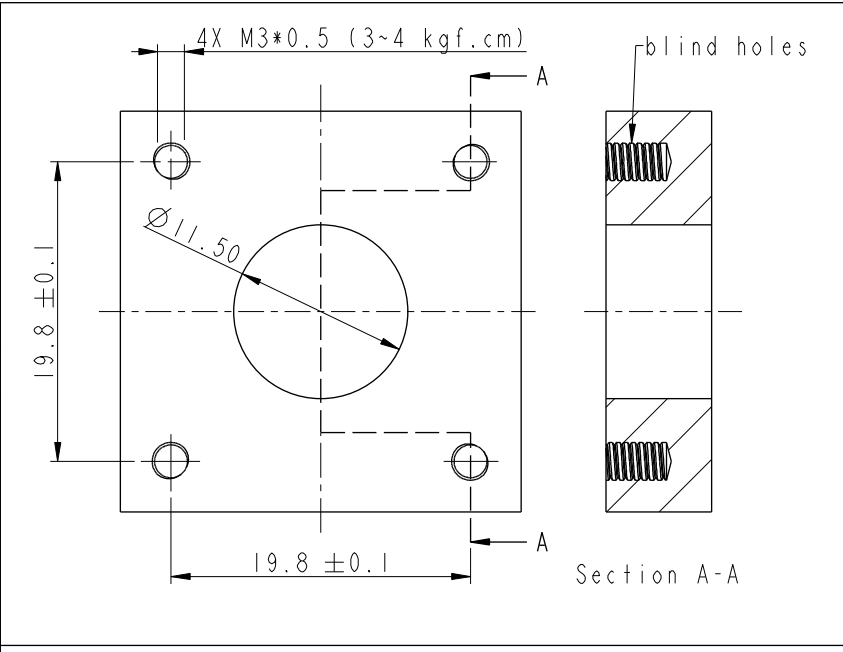


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

8P	24	MI2A-08PMMS-SS8EXX
5P	22	MI2A-05PMMS-SS8EXX
4P		MI2A-04PMMS-SS8EXX
Contacts	AWG	Item No.

F
E
D
C
B
A

4	Black	黑	5	Gray	灰	8	Red	紅
3	Blue	藍	4	Black	黑	7	Blue	藍
2	White	白	3	Blue	藍	6	Pink	粉
1	Brown	棕	2	White	白	5	Gray	灰
			1	Brown	棕	4	Yellow	黃
						3	Green	綠
						2	Brown	棕
						1	White	白
Pin #	Wire		Pin #	Wire		Pin #	Wire	

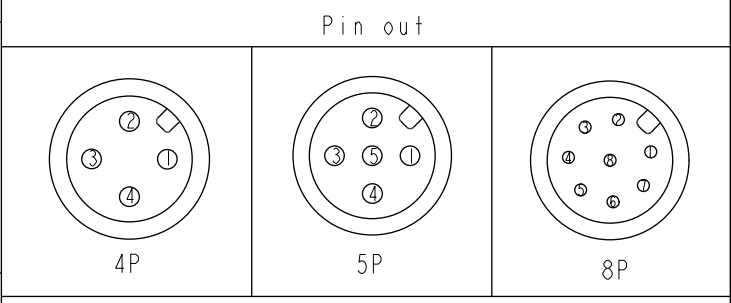

Pin Assignment Front View

Recommended Panel Cut-Out

UNIT: mm			TITLE N SEN, M12 A, SCREW
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 2:1	SIZE A4	SHEET 2 OF 2
REV. A	WC-REV. A.6	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRWN BY Jiahe Lin	DATE 2022-07-08
DWG NO MI2A-XXPMMS-SS8EXX	CHEKED BY Allen Pan	DATE 2022-07-08
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2022-07-08