


HC-B 24-KML-80/O1STM32

Order No.: 1647268



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1647268>

HEAVYCON coupling housing B24, with single locking latch, height 80 mm, with thread 1x M32

Commercial data	
GTIN (EAN)	 4 017918 985004
Note	Made-to-order
sales group	D002
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 497 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
02/21/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data

General data	
Note	For contact inserts HC-B24, BB46, D64, DD108, M
Design	B24
Height	80 mm
Width	43 mm
Length	120 mm

Housing type	Coupling housings
Locking type	With single locking latch
Type of the screw connection	1x M32
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

Diagrams/Drawings

Dimensioned drawing

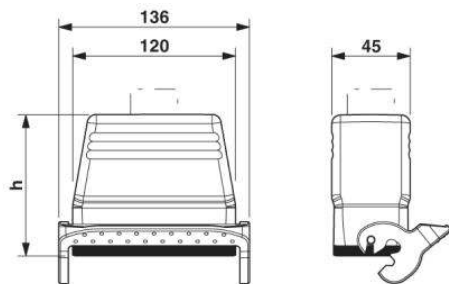

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;