
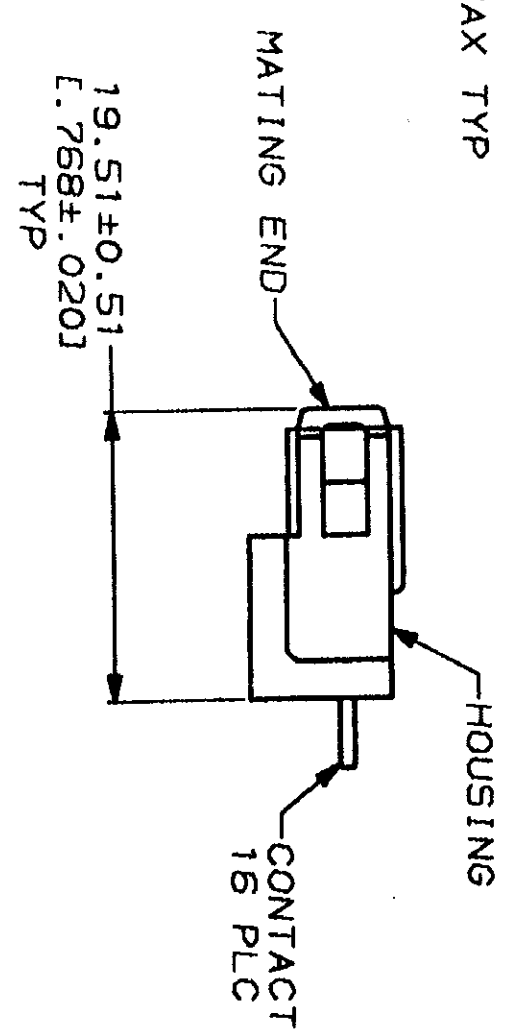
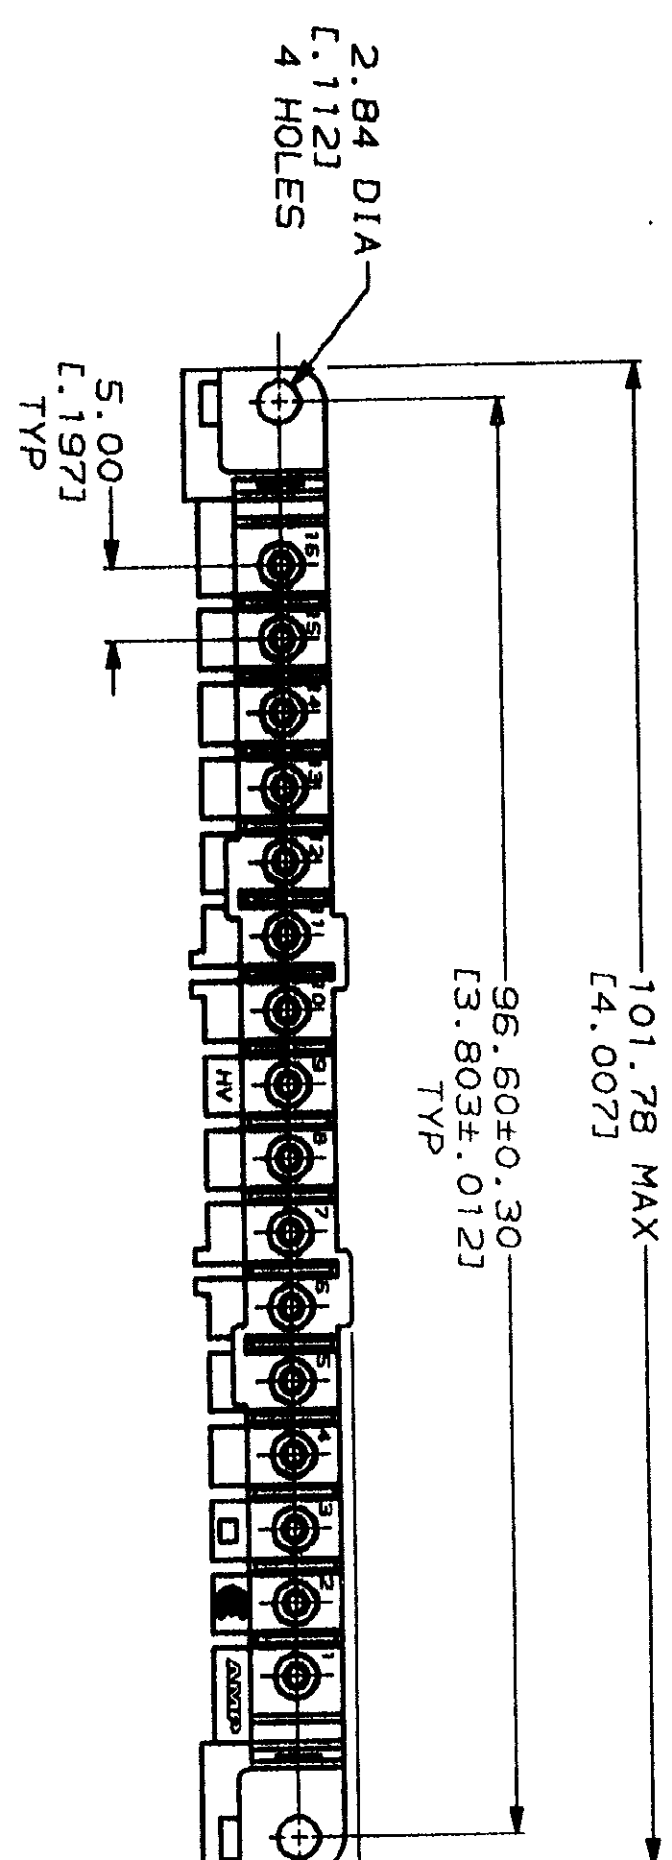
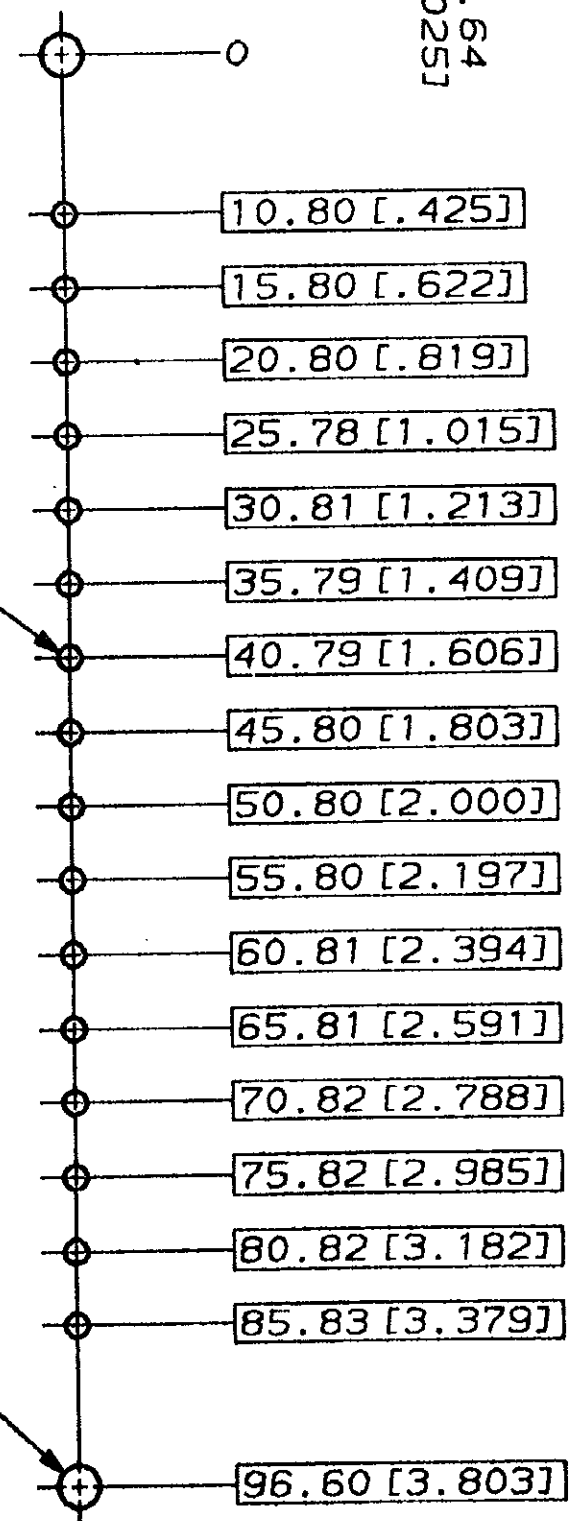


REV	LOC	Q137	ZONE	LTR	DESCRIPTION	DATE	APPD
1	BD	37		6	REDRAWN WITHOUT CHANGE	08/07/92	

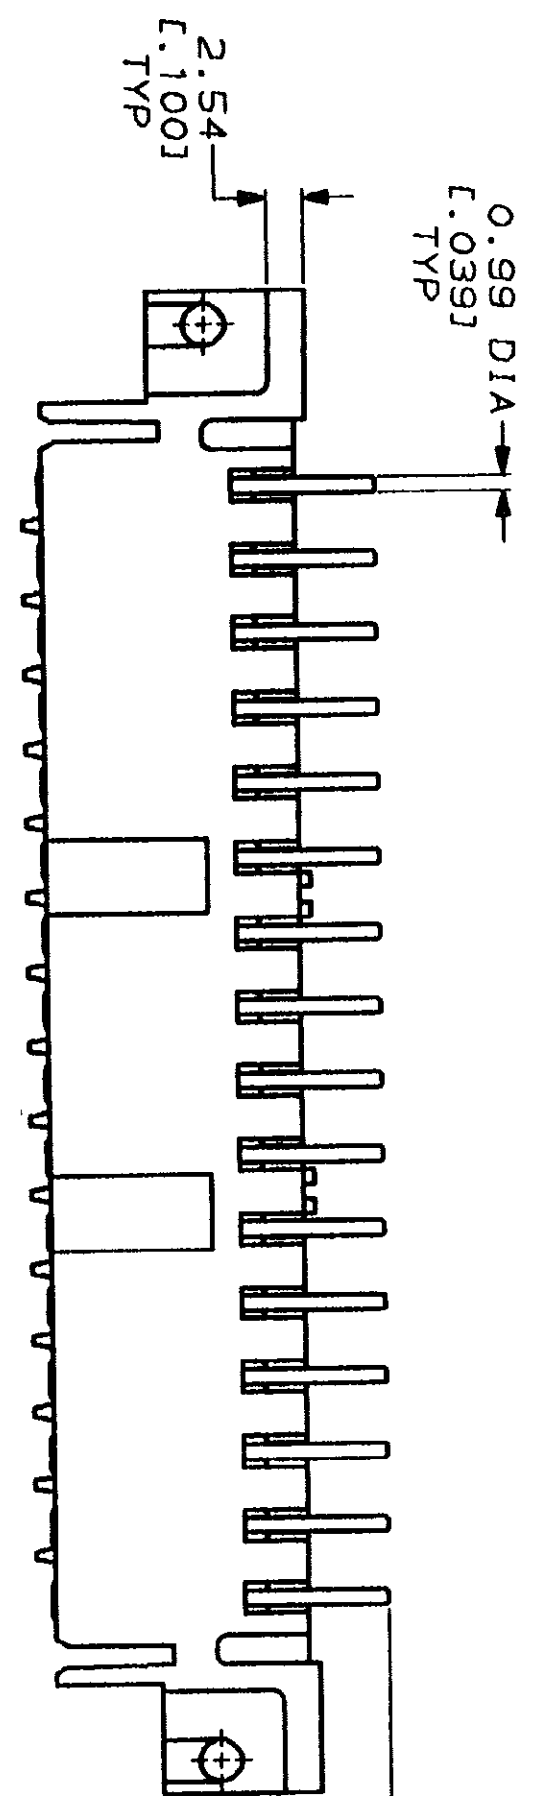

RECOMMENDED PC BOARD LAYOUT

- 1 NYLON, RED.
- 2 PHOSPHOR BRONZE.
- 3 3.81µm [L.000150] MIN TIN-LEAD OVER 1.27µm [L.000050] MIN NICKEL.
- 4 0.76µm [L.000030] MIN GOLD FOR A LENGTH OF 5.08 [L.200] MIN FROM MATING END, 3.81µm [L.000150] MIN TIN-LEAD FOR A LENGTH OF 5.36 [L.211] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [L.000050] MIN NICKEL.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING VERSION MUST BE USED. REVISED EDITIONS SHOULD BE CONTROLLED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 1. PLC DEC ± 0.25 [L.010] 2. PLC DEC ± 3. PLC DEC ± MATERIAL ANGLES HOUSING: $\nabla$ CONTACTS: $\nabla$	DR 08/07/92 L.SIPE CHK 8-25-92 R.STONE APPD 8-25-92 A.TRAVIS C.ROHDE PRODUCT SPEC	AMP AMP Incorporated Harrisburg, PA 17105-3608
CONTACTS: SEE TABLE	APPLICATION SPEC	SOCKET HEADER ASSEMBLY, 16 POSN, IN-LINE, METRIMATE
FINISH	SCALE 2:1	SIZE CAGE CODE DRAWING NO 00779 C-207615
WEIGHT		SHEET 1 OF 1

CONTACT FINISH	207615-3
PART NO	207615-1