

SOLISTRAND

TE Internal #: 8-34114-1 Ring Terminals & Spade Terminals, Ring Tongue, 22 – 16 AWG Wire Size, .3 – 1.42 mm² Wire Size, 509 – 3260 CMA Wire Size, Stud Size 5/16 / M8

View on TE.com >

Terminals & Splices > Ring Terminals & Spade Terminals



Ring & Spade Terminal Type: Ring Tongue

Wire Size: 509 – 3260 CMA

Stud Size: 5/16, M8

Features

Product Type Features



Stud Size	5/16, M8				
Sealable	No				
Wire Insulation Support Retention Type	Non-Insulation Support				
Configuration Features					
Number of Holes	1				
Body Features					
Product Weight	1.056 g				
Contact Features					
Ring & Spade Terminal Type	Ring Tongue				
Barrel Type	Closed				
Terminal Orientation	Straight				
Terminal Plating Material	Tin				
Mechanical Attachment					
Wire Insulation Support	Without				
Dimensions					

C For support call+1 800 522 6752

8-34114-1

Ring Terminals & Spade Terminals, Ring Tongue, 22 – 16 AWG Wire Size, .3 – 1.42 mm² Wire Size, 509 – 3260 CMA Wire Size, Stud Size 5/16 / M8



Wire Size	509 – 3260 CMA				
Stud Diameter	7.92 mm[.312 in]				
Tongue Thickness	.84 mm[.033 in]				
Product Length	21.74 mm[.856 in]				
Barrel Inside Diameter	1.55 mm[.061 in]				
Usage Conditions					
Insulation Option	Uninsulated				
Operating Temperature Range	170 °C[338 °F]				
Operation/Application					
Compatible With Wire Base Material	Copper				
Compatible With Wire Plating Material	Tin				
Industry Standards					
Government Qualified Terminal	No				
Packaging Features					
Packaging Quantity	100				
Packaging Method	Loose Piece				

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these


8-34114-1

Ring Terminals & Spade Terminals, Ring Tongue, 22 – 16 AWG Wire Size, .3 – 1.42 mm² Wire Size, 509 – 3260 CMA Wire Size, Stud Size 5/16 / M8



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

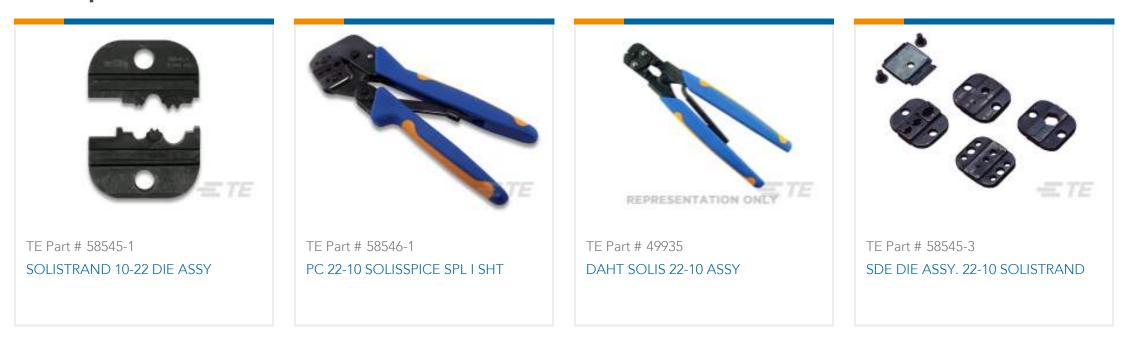

Customers Also Bought



TE Part #2-1318118-9	TE Part #1318110-1	TE Part #34108	TE Part #170721-2
DYNAMIC D2100 REC HSG 20P Y	DYNAMIC D-2000 TAB CONT S	SOLIS R 22-16 COMM 22-18 MIL 8	SOLISTRAND RINGTONG
	E TE		ETE
TE Part #1473672-1	TE Part #1463260-1	TE Part #416947-000	TE Part #130017
025 PLUG ASSY	DAHT 025 TAB REC G-Tab 22-20 ASSY	CWT-6-W122-5	SOLIS R 22-16 5MM



Documents

8-34114-1

Ring Terminals & Spade Terminals, Ring Tongue, 22 – 16 AWG Wire Size, .3 – 1.42 mm² Wire Size, 509 – 3260 CMA Wire Size, Stud Size 5/16 / M8



Product Drawings

SOLIS R 22-16COMM22-18MIL 5/16

English

CAD Files

Customer View Model ENG_CVM_CVM_8-34114-1_U.2d_dxf.zip

English

3D PDF 3D

Customer View Model ENG_CVM_CVM_8-34114-1_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-34114-1_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages SOLISTRAND - QRG

English