

High-Frequency Amplifier Transistor (20V, 50mA, 1.5GHz)

2SC5661 / 2SC4725 / 2SC4082 / 2SC3837K

Features

- 1) High transition frequency. (Typ. $f_T = 1.5GHz$)
- 2) Small rbb' Cc and high gain. (Typ. 6ps)
- 3) Small NF.

•Packaging specifications and hFE


Туре	2SC5661	2SC4725	2SC4082	2SC3837K
Package	VMT3	EMT3	UMT3	SMT3
hfe	NP	NP	NP	NP
Marking	AC*	AC*	1C*	AC*
Code	T2L	TL	T106	T146
Basic ordering unit (pieces)	8000	3000	3000	3000

* Denotes hre

• Absolute maximum ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Collector-base voltage		Vсво	30	V
Collector-emitter voltage		VCEO	20	V
Emitter-base voltage		Vebo	3	V
Collector current		lc	50	mA
Collector power dissipation	2SC5661, 2SC4725	- Pc	0.15	w
	2SC4082, 2SC3837K		0.2	vv
Junction temperature		Tj	150	°C
Storage temperature	9	Tstg	-55 to +150	°C

•Dimensions (Unit : mm)

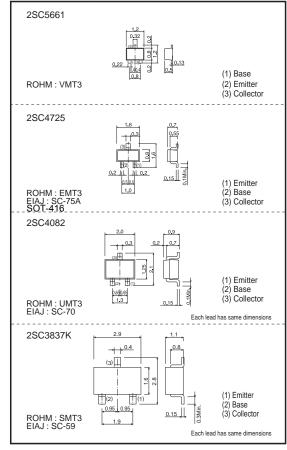

•Electrical characteristics (Ta=25°C)

	.(:~ =0 0	/				
Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Collector-base breakdown voltage	ВУсво	30	-	-	V	$Ic = 10\mu A$
Collector-emitter breakdown voltage	BVCEO	20	-	-	V	Ic = 1mA
Emitter-base breakdown voltage	ВVево	3	-	-	V	$I_E = 10 \mu A$
Collector cutoff current	Ісво	-	-	0.5	μΑ	Vcb = 15V
Emitter cutoff current	Іево	-	-	0.5	μΑ	VEB = 2V
Collector-emitter saturation voltage	VCE(sat)	-	-	0.5	V	Ic/I _B = 20mA/4mA
DC current transfer ratio	hfe	82	-	180	-	Vce/Ic = 10V/10mA
Transition frequency	f⊤	600	1500	-	MHz	Vce = 10V , Ie = -10mA , f = 200MHz
Output capacitance	Cob	-	0.9	1.5	pF	$V_{CB} = 10V$, $I_E = 0A$, $f = 1MHz$
Collector-base time constant	rbb'-Cc	-	6	13	ps	Vсв = 10V , Ic = 10mA , f = 31.8MHz
Noise factor	NF	-	4.5	-	dB	$V_{CE} = 12V$, $I_C = 2mA$, $f = 200MHz$, $Rg = 50\Omega$

This product might cause chip aging and breakdown under the large electrified environment. Please consider to design ESD protection circuit.

•Electrical characteristic curves





Fig.1 DC current gain vs. collector current



TRANSITION FREQUENCY : fr (MHz)

Fig.4 Gain bandwidth product vs. emitter current




Fig.7 Insertion gain vs. collector current




Fig.2 Collector-emitter saturation voltage vs. collector current




Fig.5 Collector to base time constance vs. collector current




Fig.8 Insertion gain vs. collector voltage




Fig.3 Capacitance vs. reverse bias voltage






Fig.6 Insertion gain vs. frequency








Fig.10 Noise factor vs. collector voltage

	Notes
	g or reproduction of this document, in part or in whole, is permitted without the ROHM Co.,Ltd.
The conten	t specified herein is subject to change for improvement without notice.
"Products"	It specified herein is for the purpose of introducing ROHM's products (hereinafte). If you wish to use any such Product, please be sure to refer to the specifications be obtained from ROHM upon request.
illustrate th	of application circuits, circuit constants and any other information contained herein e standard usage and operations of the Products. The peripheral conditions mus to account when designing circuits for mass production.
However, s	was taken in ensuring the accuracy of the information specified in this document should you incur any damage arising from any inaccuracy or misprint of such , ROHM shall bear no responsibility for such damage.
examples implicitly, a other partie	cal information specified herein is intended only to show the typical functions of and of application circuits for the Products. ROHM does not grant you, explicitly o ny license to use or exercise intellectual property or other rights held by ROHM and es. ROHM shall bear no responsibility whatsoever for any dispute arising from the technical information.
equipment	cts specified in this document are intended to be used with general-use electronic or devices (such as audio visual equipment, office-automation equipment, commu vices, electronic appliances and amusement devices).
The Produc	ts specified in this document are not designed to be radiation tolerant.
	M always makes efforts to enhance the quality and reliability of its Products, a ay fail or malfunction for a variety of reasons.
against the failure of a shall bear	sure to implement in your equipment using the Products safety measures to guard possibility of physical injury, fire or any other damage caused in the event of the ny Product, such as derating, redundancy, fire control and fail-safe designs. ROHM no responsibility whatsoever for your use of any Product outside of the prescribed of in accordance with the instruction manual.
system wh may result instrument fuel-contro any of the l	cts are not designed or manufactured to be used with any equipment, device of ich requires an extremely high level of reliability the failure or malfunction of which in a direct threat to human life or create a risk of human injury (such as a medica , transportation equipment, aerospace machinery, nuclear-reactor controller ller or other safety device). ROHM shall bear no responsibility in any way for use of Products for the above special purposes. If a Product is intended to be used for any al purpose, please contact a ROHM sales representative before purchasing.
be controll	d to export or ship overseas any Product or technology specified herein that may ed under the Foreign Exchange and the Foreign Trade Law, you will be required to ense or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/