


3-phase busbars Modular spacing 63 mm for 2 switches and accessories Fork shape connections



General technical data		
size of the circuit-breaker		S00, S0
suitability for use		circuit-breakers 3RV2
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
Installation/ mounting/ dimensions		
operational current rated value	A	63
number of poles for main current circuit		3
type of electrical connection for main current circuit		screw-type terminals
Certificates/ approvals		
General Product Approval		Declaration of Conformity

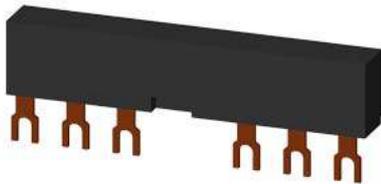

[Confirmation](#)



EG-Konf.

Test Certificates	Marine / Shipping				
<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Special Test Certificate</a>				
		ABS	BUREAU VERITAS	DNV	LRS

Marine / Shipping	other				
			<a href="#">Environmental Confirmations</a>	<a href="#">Confirmation</a>	
PRS	RINA	RMRS			VDE

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a> Industry Mall (Online ordering system) <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RV1915-3AB">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RV1915-3AB</a> Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1915-3AB>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1915-3AB>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV1915-3AB&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1915-3AB&lang=en)

last modified:

2/9/2022 