



# SOLID STATE INC.

46 FARRAND STREET  
BLOOMFIELD, NEW JERSEY 07003      www.solidstateinc.com

## MR1120 thru MR1126 MR1128 MR1130


### MEDIUM-CURRENT SILICON RECTIFIER

Medium-current silicon rectifiers feature high surge current capacity, and low forward voltage drop.

### MEDIUM-CURRENT SILICON RECTIFIERS

50-1000 VOLTS  
12 AMPERES

DO 4



### MAXIMUM RATINGS

Rating	Symbol	MR 1120	MR 1121	MR 1122	MR 1123	MR 1124	MR 1125	MR 1126	MR 1128	MR 1130	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	50	100	200	300	400	500	600	800	1000	Volts
Non-Repetitive Peak Reverse Voltage (one half-wave, single phase, 60 cycle peak)	$V_{RSM}$	100	200	300	400	500	600	720	100	1200	Volts
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	210	280	350	420	560	700	Volts
Average Rectified Forward Current (single phase, resistive load, 60 Hz, $T_C = 150^\circ\text{C}$ )	$I_O$	←————— 12 —————→									Amp
Peak Repetitive Forward Current ( $T_C = 150^\circ\text{C}$ )	$I_{FRM}$	←————— 75 —————→									Amp
Non-Repetitive Peak Surge Current (superimposed on rated current at rated voltage, $T_C = 150^\circ\text{C}$ )	$I_{FSM}$	←————— 300 (for 1/2 cycle) —————→									Amp
$I^2t$ Rating (non-repetitive, 1 ms < t < 8.3 ms)	$I^2t$	←————— 375 —————→									$A_{(rms)}^2s$
Maximum Junction Operating and Storage Temperature Range	$T_J, T_{stg}$	←————— -65 to +190 —————→									$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS (All Types)

Characteristic	Symbol	Max	Unit
Full Cycle Average Forward Voltage Drop ( $I_O = 12$ Amps and Rated $V_r$ , $T_C = 150^\circ\text{C}$ , Half Wave Rectifier)	$V_{F(AV)}$	0.55	Volts
DC Forward Voltage Drop ( $I_F = 12$ Adc, $T_C = 25^\circ\text{C}$ )	$V_F$	1.0	Volts
Full Cycle Average Reverse Current ( $I_O = 12$ Amps and Rated $V_r$ , $T_C = 150^\circ\text{C}$ , Half Wave Rectifier)	$I_{R(AV)}$	1.5	mA
DC Reverse Current (Rated $V_R$ , $T_C = 25^\circ\text{C}$ )	$I_R$	0.5	mA

# MR1120 thru MR1126, MR1128, MR1130

## THERMAL CHARACTERISTICS




Maximum Steady State DC Thermal Resistance,  $R_{th(j-c)}$ : 2.5°C/Watt

## MECHANICAL CHARACTERISTICS

**POLARITY:** CATHODE-TO-CASE (reverse polarity units are available upon request and are designated by an "R" suffix i.e. MR1120R).


**MOUNTING POSITIONS:** Any

**STUD TORQUE:** 15 in-lbs maximum.

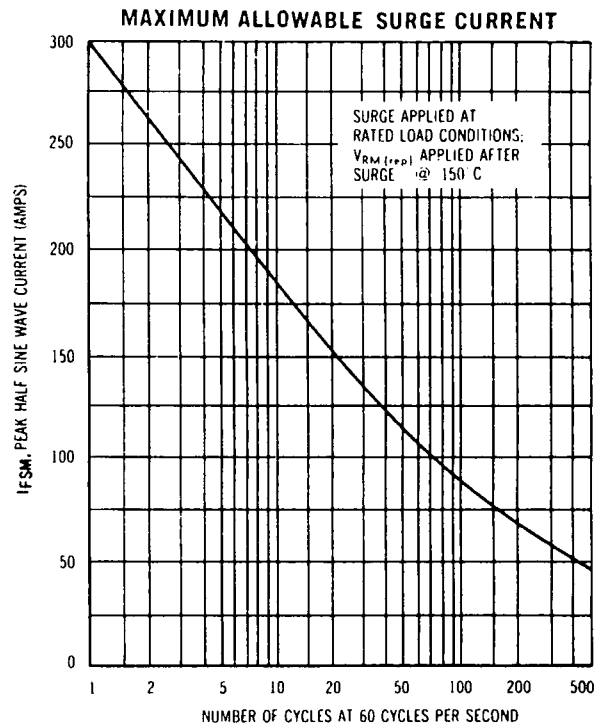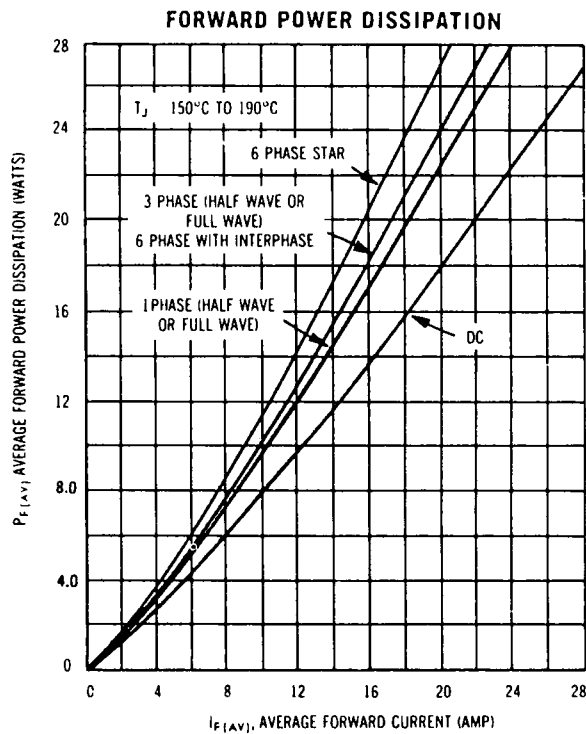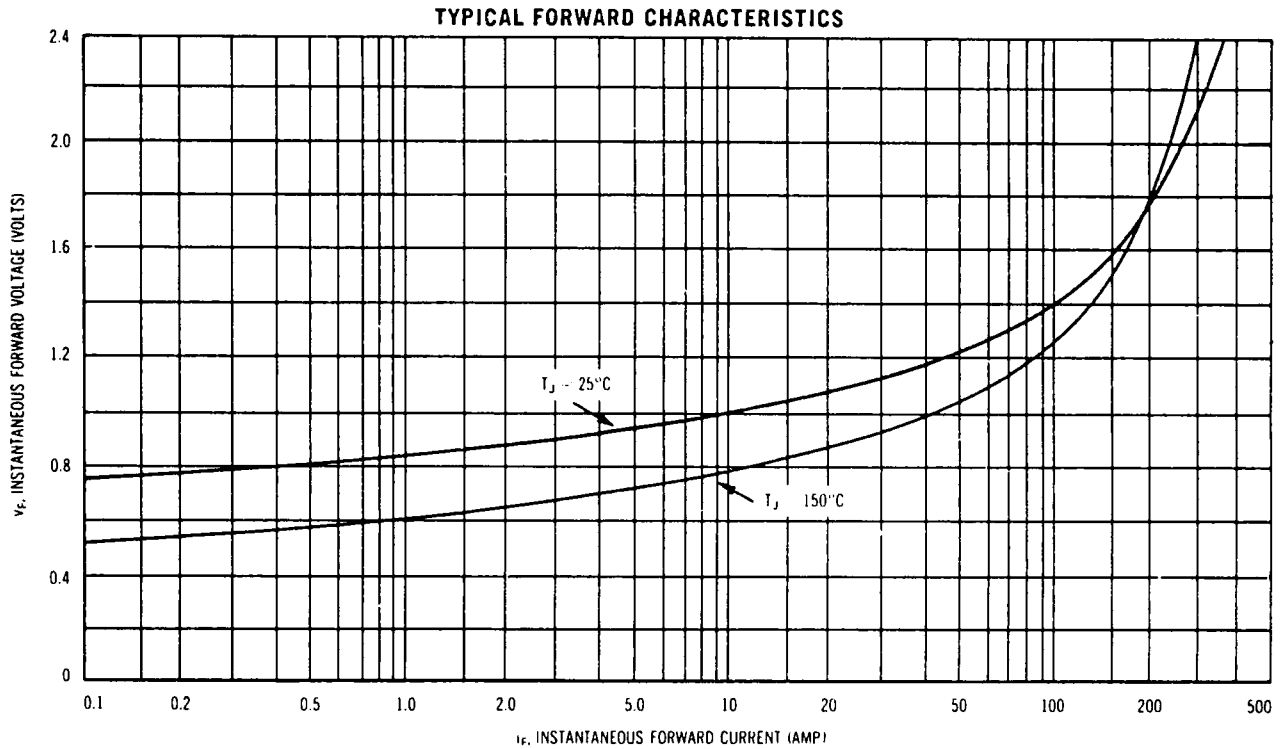


# MR1120 thru MR1126, MR1128, MR1130


## MAXIMUM CURRENT RATINGS

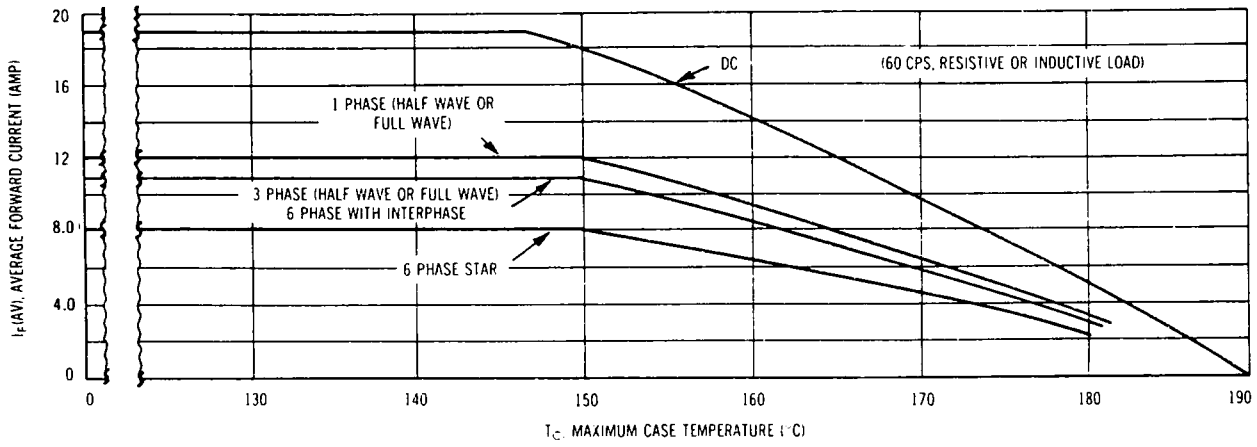

## EFFECTIVE TRANSIENT THERMAL IMPEDANCE

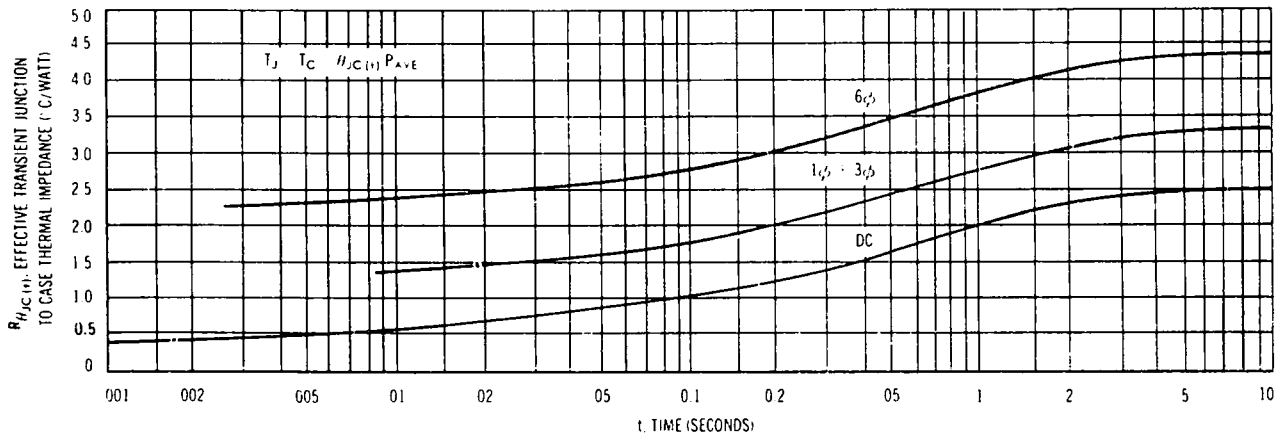


## CURRENT DERATING DATA

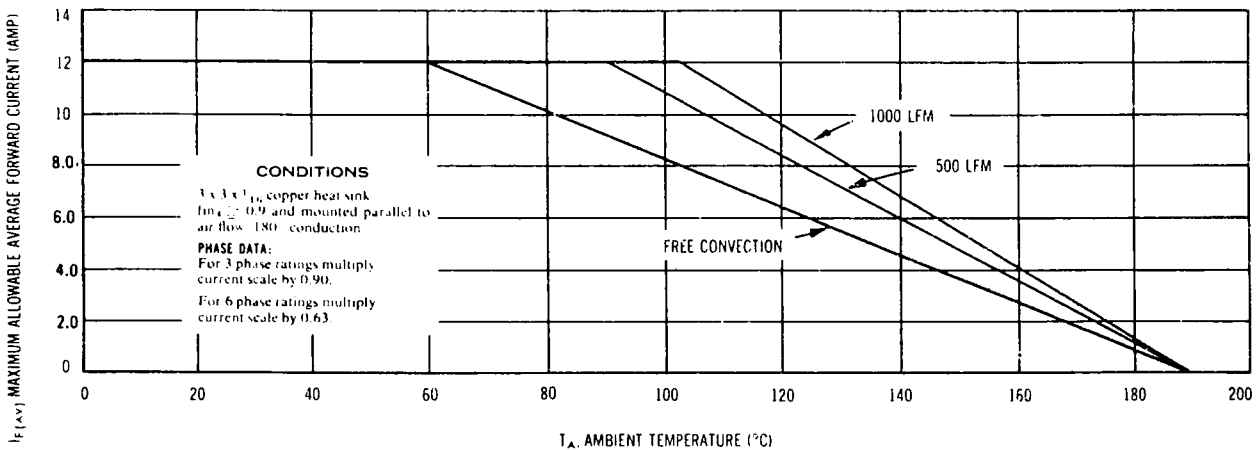

# PACKAGE MECHANICAL DATA

DO 4 Metal

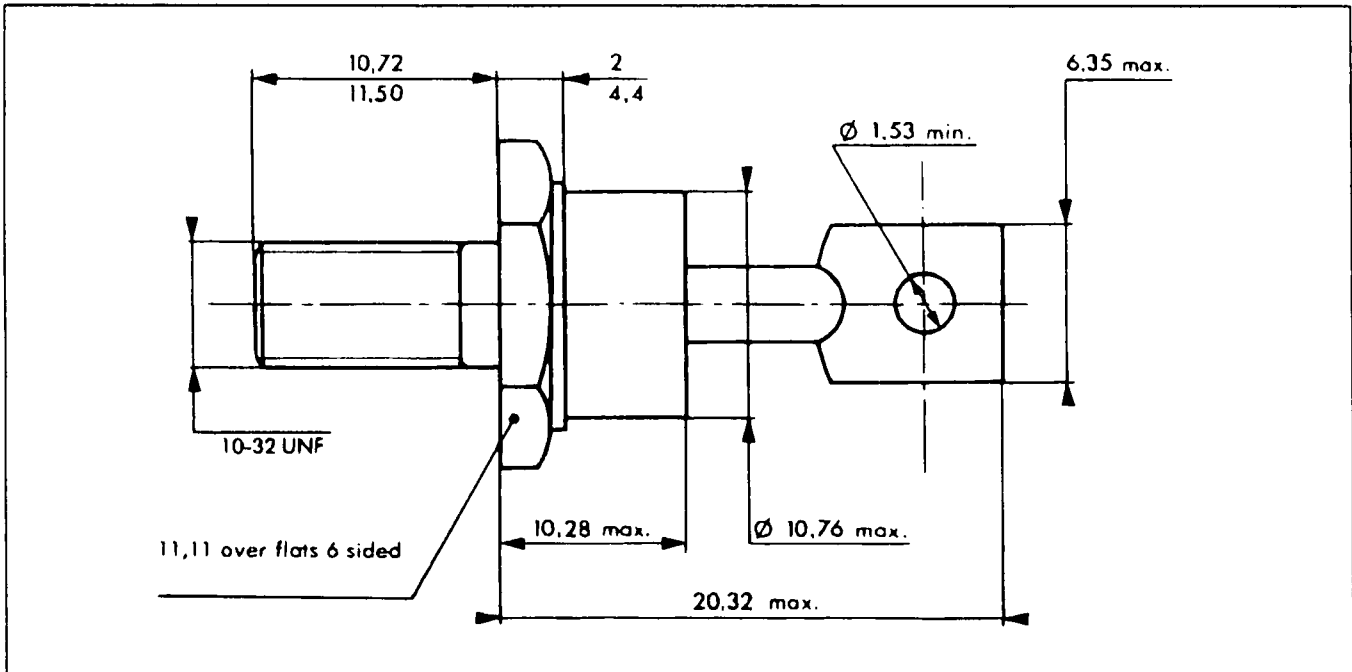

Marking : Cathode connected to case : type number  
Anode connected to case : type number + suffix R