


Part Number:	SW1000304-1	
DRAWN	CJ	3/24/2017
CHECKED	P.D.	10/6/2017
APPROVED	C.E.	10/6/2017
Description:	Waterproof Dynamic Speaker	
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com		

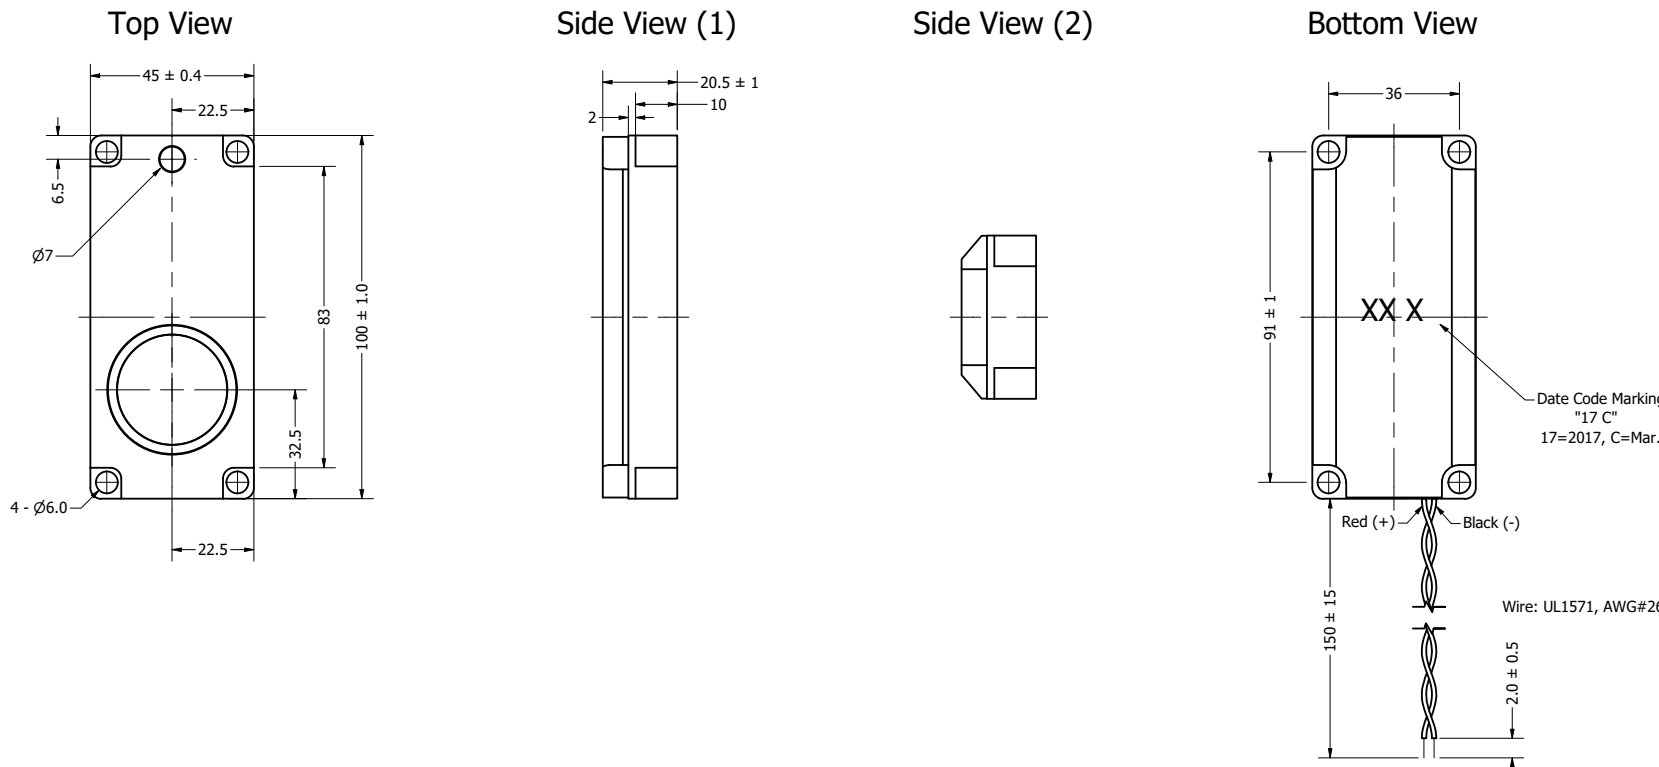

Items	Specifications	Conditions	REVISION HISTORY			
			REV	DESCRIPTION	DATE	APPROVED
Sound Pressure Level	106	dB (@ 10cm), Avg.				
Resonant Frequency	350	Hz		Released from Engineering	10/6/2017	C.E.
Frequency Range	350 ~ 20,000	Hz	1	Add polarity marking, remove connector	10/24/2017	C.E.
Nominal Power	3	W	2	Update markings	2/28/2018	C.E.
Max. Power	5	W	3	Updated tolerances	6/11/2018	C.E.
Impedance	4	Ω	4	Updated dimensions, SPL	8/9/2018	C.E.
Cone Material	Mylar					
Mount Type	Frame Mount					
IP Rating	IP67					
Storage Temperature	-20 ~ +55	°C				
Operating Temperature	-20 ~ +55	°C				
Weight	42.5	g				

- NOTES
- 1) All dimensions are in mm unless otherwise noted
 - 2) All tolerances are ± 0.5 mm unless otherwise noted
 - 3) All parts meet RoHS
 - 4) Subject to change or redrawn without notice