

DIN rail adapter - FOC-PP-SB-SC:6 - 1411902

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail module, empty, for 6x SC duplex

DIN rail module, 6x SC duplex,
without pigtails and splice holder

Product Description

DIN rail module, front plate fitted with 6x SC duplex coupling (OM3), without pigtails and splice holder. Housing (2-piece) for fixing on the DIN rail, integrated rack for accommodating excess lengths of fiber (protection), cable entry possible by means of M20 x 1.5 screw connection on top/bottom (screw connection available as an option). Ready for DIN rail mounting by means of adapter on the back, ready for equipotential bonding.

Supplied as standard: DIN rail housing, empty (2-piece), front plate with port marking and integrated splice comb (mounted), front plate fitted with 6x SC duplex coupling OM3 (beige/turquoise/turquoise) metal.

Product Features

- Cable entry possible by means of M20 x 1.5 screw connection on top and bottom
- Suitable for industrial applications
- Compact dimensions despite large splice comb
- Snap-in adapter for easy DIN rail mounting
- Ready for equipotential bonding



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 780.0 g |
| Custom tariff number | 85389099 |
| Country of origin | Germany |

Technical data

Mechanical characteristics

| | |
|--------------------|---------------|
| Number of slots | 6 |
| Connection profile | SC connectors |
| Fiber type | GOF |

DIN rail adapter - FOC-PP-SB-SC:6 - 1411902

Technical data

Mechanical characteristics

| | |
|-----------------------------|-----------------------------------|
| Fiber | 50/125 µm OM3 |
| Ferrule diameter | 2.50 mm |
| Insertion/withdrawal cycles | > 500 |
| Type of contact | Fiber optics connectors |
| Max. cable diameter | M20 x 1.5 cable gland |
| External cable diameter | depending on optional cable gland |
| Type of cable | For all common cable types |
| Color | light grey RAL 7035 |
| Mounting type | DIN rail mounting |

Ambient conditions

| | |
|---|---|
| Ambient temperature (operation) | -25 °C ... 70 °C (according to IEC 61300-2) |
| Ambient temperature (storage/transport) | -25 °C ... 70 °C (according to IEC 61300-2) |
| Degree of protection | IP20 |

Material data

| | |
|--|---------------------|
| Flammability rating according to UL 94 | V0 |
| Housing material | Sheet steel |
| Housing surface material | Powder-coated, gray |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260708 |
| eCl@ss 8.0 | 19170105 |


ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC000731 |
| ETIM 5.0 | EC000731 |

Drawings

DIN rail adapter - FOC-PP-SB-SC:6 - 1411902

Dimensional drawing

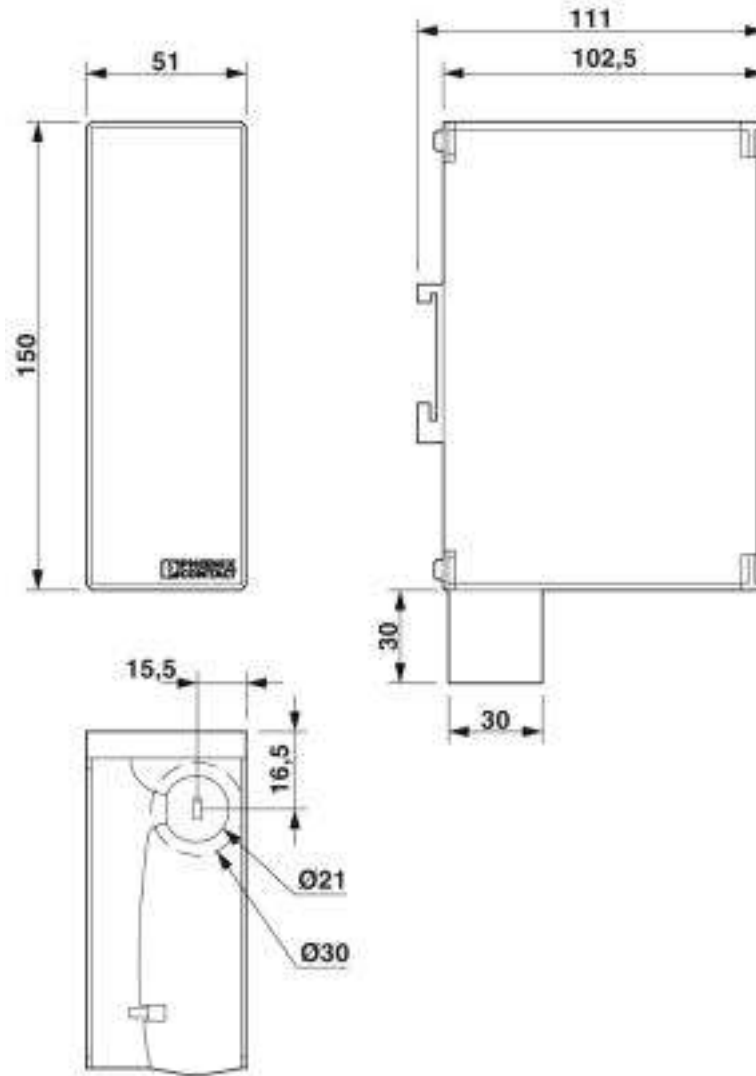

DIN rail module, 6 x LC duplex, without pigtaills