


COIL: @ +25° C
 RESISTANCE 2000 OHMS ± 10%
 NOMINAL VOLTAGE 18.0 VDC
 MUST OPERATE 4.5 mADC
 MUST RELEASE 0.50 mADC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX (HI-G IS 8 MS)
 RELEASE 10 MS MAX (HI-G IS 4 MS)
 CONTACT BOUNCE 3 MS MAX

CUSTOMER DATA SHEET

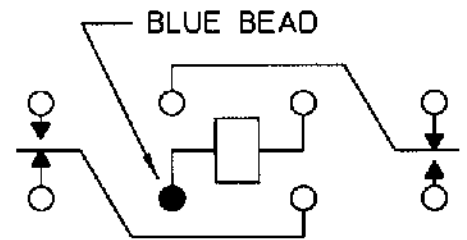

CONTACT RATING: LOW LEVEL TO 2 AMPS
 30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/20/98 CK2/20/98 MB

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. HI-G
 CUST. NO. 2BK-1B-118

TYPE "SF" RELAY

SF6193H01