

—	G	П	m	D	O



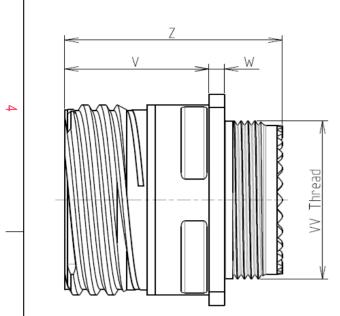

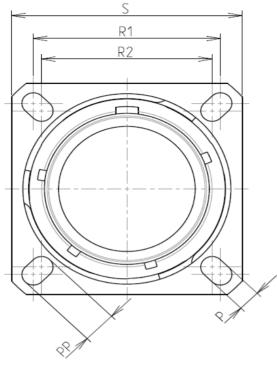

Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating : Thermoplastic -Insulator -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet : Gold over copper Alloy $0.8 \mu m$ minimum -Contact Plating : 500 Mating cycles -Durability -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 500 hours

: 39.36 g ± 10%

8D 0

G

11

-

S

02

Ρ

F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

т		D		0		σ		A	_
									4
				LA	YOUT SHOWN AS	SEXAMPLE			3
ector dimension Nominal 3.25±0.2 4.93±0.2 20.62 18.26 26.2±0.3 20.83+0/-1.25				due to a use the Specification	e of the Products is issued by either	any non-conformit which does not con of the Parties or b dation, technical no	mply with by a third party		
2.1/2.5 31.5 Max			CountryJurisdiction & Control ListFRNot Listed2						2
D M15x1-6g			1	1	PN: 8D01	1S02PC			
		A	07-10-2016	First Release					
		ISS Design	DATE ned By:	Latest modificati Date:			CUSTOMER DRA	MOD N°	-
т			TITLE Stainless Steel Receptacle 8D series						
			ALE .		General linear Tolerances: ±	•	NPRDS / PROJE 859		1
ORIENTATION : C CONTACT TYPE : PIN(500 Matings)		SC	SOURIAU WWW.SOURIAU.COM This document is the push SOURIAU it must not be reprod communicated without		IRIAU e reproduced or				
	CONTACT LAYOUT : 11-02				SOURIA	U DRG N°		SHEET	
7			\3		8D011	S02PC-C	1	1/2	
E	/	D		С		В		А	

1	т	۵	н г	m	D	0
		Contact Layout				Panel Cuto
4	.x .0 (2.	+Y +Y +Y +X +X +X +X (2.4imm)			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi IE A B Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) A + 0.95 (2.41) + 0.00 (.00) B - 0.95 (2.41) + 0.00 (.00)	ct n		<u>.</u>	Dim
ى ك						ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
2						PN: 8D011
					ISS DATE Designed By:	Date:
_					SCALE NA	General linear Tolerances:
					FORMAT	
		<u></u>		E T	A3	SOURIAL 8D011S
	Н	G	F	E	D	C

