

MATERIALS AND FINISHES

4.3-10 PLUG CONNECTOR  
SEE SD-73162-680

SHRINK TUBE: PE

CABLE: FLEXIFORM 401 FJ

LABEL: PET

(ALL MATERIAL COMPLIANT RoHS)

PERFORMANCE REQUIREMENTS

FREQUENCY RANGE: 0-3GHz

WITHSTAND VOLTAGE(AC): 1500V @0.5mA

RETURN LOSS: ≤-25dB(690-2700MHz),

PIM3(2x43dBm): ≤-160dBc @700MHz/1800MHz/2600MHz


WATER-PROOF: IP68 (WHEN MATED)

NOTE 1:

PACKAGING BY PLASTIC BAG

NOTE 2:

CABLES SHIPPED WITH POLYETHYLENE DUST CAPS ON CONNECTORS

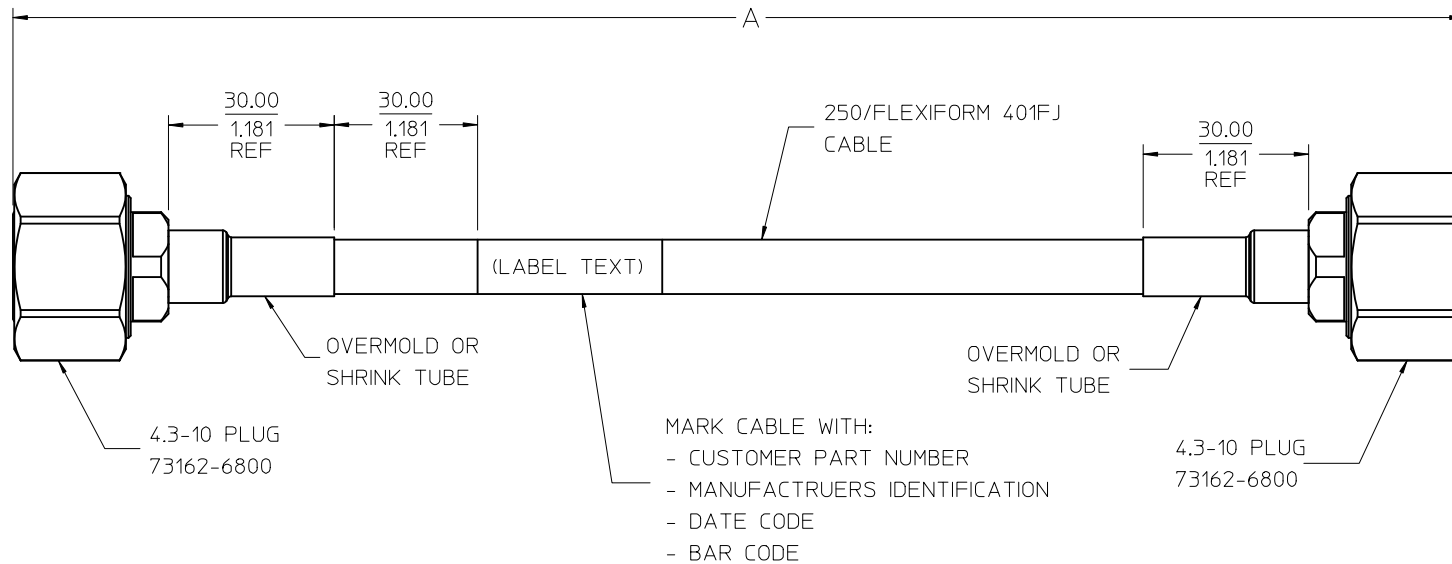

73135-6691	7.795±.118	198.00±3.00	09-142-01
73135-6690	10.630±.118	270.00±3.00	09-141-01
PART NO.	IN	MM	LABEL TEXT/CUSTOMER PN.

IEC61169-54	4.3-10 INTERFACE
SPECIFICATION	DESCRIPTION

CHG: NEW RELEASE PER PDR1606975 EC NO: URF2017-0042 DRAWN: YHUANG11 2016/07/04 CHKD: MYE08 APPR: MYE08 2016/08/01 DESCRIPTION: A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM/IN	METRIC	◎	
	▽=0	4 PLACES ± --- ± ---	DRAWN BY YHUANG11	DATE 2016/07/04	TITLE	CA, 4.3-10 PLUG STR WITH 250/401 FJ CABLE
	▽=0	3 PLACES ± --- ± ---	CHECKED BY	DATE	CA-4.3-10, 50 OHMS	<b>molex</b>
	2 PLACES ± --- ± ---	APPROVED BY MYE08	DATE 2016/08/01	MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	1 PLACE ± --- ± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	SD-73135-669	1 OF 1
	0 PLACE ± --- ± ---	ANGULAR ± 2 °		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		