


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|---------------------------|---------|--------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| BD | 39 | H | 0G3B-0317-03 | 24APR03 | TK GS |
| | | H1 | REVISED PER ECO-09-020689 | 28AUG09 | KK AEG |

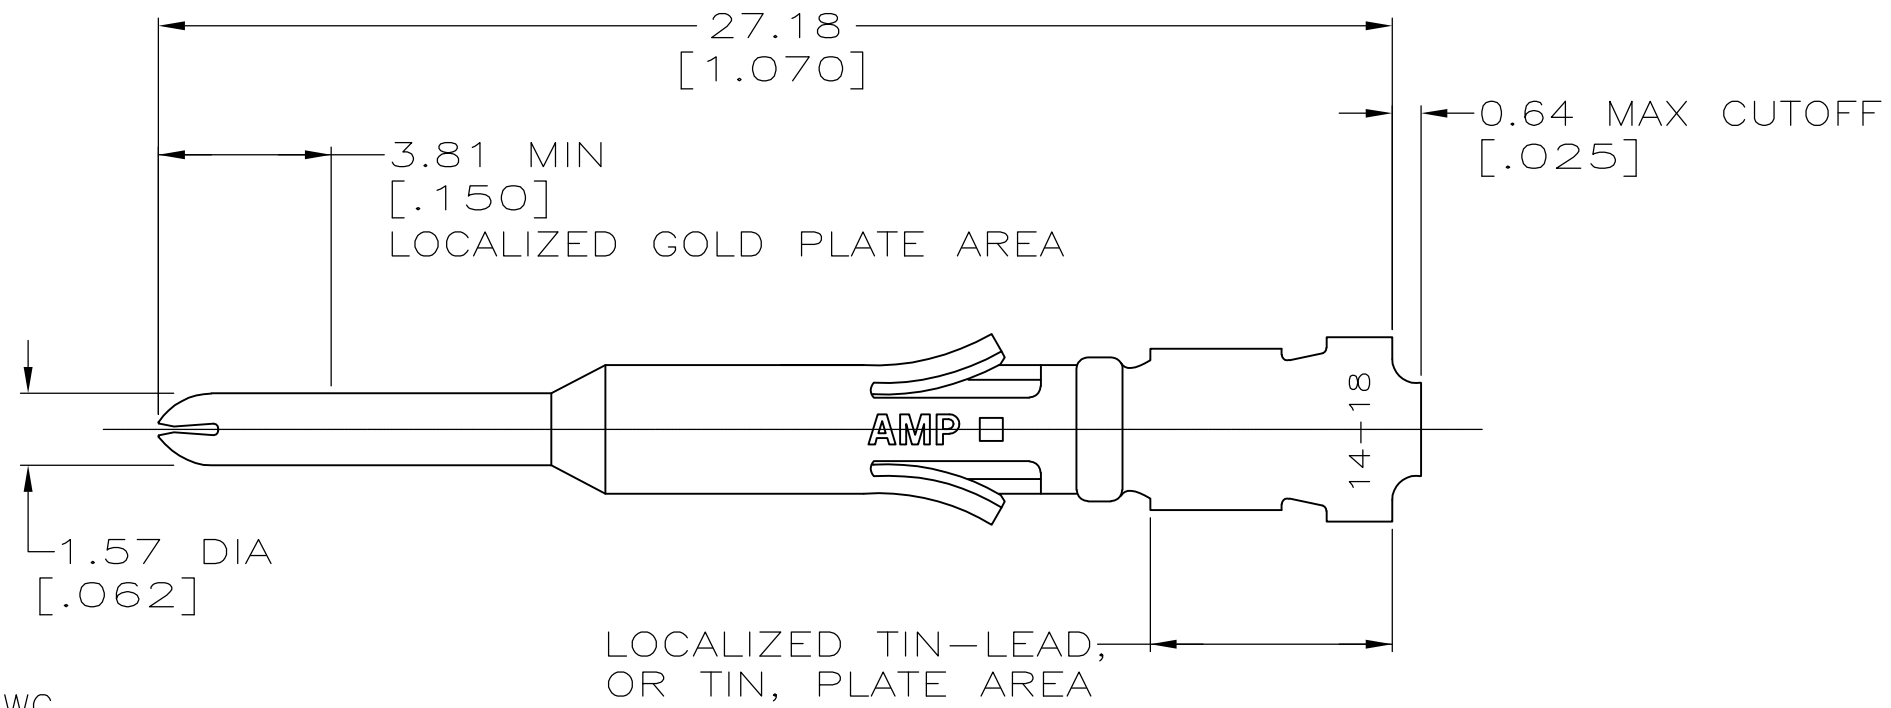

1. WIRE RANGE 18-14 AWG.
2. INSULATION RANGE 2.03-3.43 [.080-.135] DIA.
3. 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27µm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA, BOTH OVER 1.27µm [.000050] MIN NICKEL.
4. TIN PLATED.
5. GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727 AND NICKEL PER QQ-N-290.
6. 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 1.27µm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27µm [.000050] MIN NICKEL.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| STRIP REF | FINISH | PART NO |
|-----------|---------|---------|
| 7 | 66577-7 | 66587-4 |
| | 66577-4 | 66587-2 |
| | 66577-2 | 66587-1 |

| | | | | |
|--|--|----------------------------|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN D.HARDY 06/15/94 | Tyco Electronics Corporation Harrisburg, PA 17105 | |
| DIMENSIONS: INCHES | | CHK R.STONE 06/22/94 | NAME CONTACT, PIN, LOOSE PIECE, TYPE VI, MULTIMATE | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD G.STEINMAUER 06/27/94 | PRODUCT SPEC | |
| 0 PLC ± - | | APPLICATION SPEC | | |
| 1 PLC ± - | | SIZE A3 | | |
| 2 PLC ± 0.13 [.005] | | CAGE CODE 00779 | | |
| 3 PLC ± - | | DRAWING NO C-66587 | | |
| 4 PLC ± - | | RESTRICTED TO | | |
| ANGLES ± - | | SCALE 6:1 | | |
| MATERIAL BRS PER MIL-C-50 | | SHEET 1 OF 1 | | |
| FINISH SEE TABLE | | REV H1 | | |
| CUSTOMER DRAWING | | | | |