

145 Adams Ave., Hauppauge, NY 11788 USA Phone (516) 435-1110 FAX (516) 435-1824

Manufacturers of World Class Discrete Semiconductors

CBR1F-D010 SERIES

1 AMP DUAL IN LINE FAST RECOVERY SILICON BRIDGE RECTIFIER

DIP CASE

DESCRIPTION


The CENTRAL SEMICONDUCTOR CBR1F-D010 series types are Silicon Full Wave Bridge Rectifiers mounted in a durable epoxy molded case. This device is ideal for printed circuit board mounting and fits into a standard DIP socket (0.1"/2.54mm spacing).

MAXIMUM RATINGS ($T_A = 25^{\circ}C$ unless otherwise noted)

		CBR1F	CBR1F	CBR1F	CBR1F	CBR1F	CBR1F	
	SYMBOL	<u>-D010</u>	<u>-D020</u>	<u>-D040</u>	<u>-D060</u>	<u>-D080</u>	<u>-D100</u>	<u>UNITS</u>
Peak Repetitive Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	٧
DC Blocking Voltage	v_R	100	200	400	600	800	1000	V
RMS Reverse Voltage	V _{R(RMS)}	70	140	280	420	560	700	V
Average Forward Current $(T_A = 50^{\circ}C)$	IO			1.0)			Α
Peak Forward Surge Current	^I FSM			50	ļ.			Α
Operating and Storage								
Junction Temperature	T_J, T_stg			-65 to	+ 150			οС

ELECTRICAL CHARACTERISTICS $(T_A = 25^{\circ}C)$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	<u>UNITS</u>
V _F	I _F =1.0A		1.3	V
I _R	$V_R = Rated V_{RRM}$		10	μΑ
I _R	$V_R = Rated V_{RRM}$, $T_A = 100^{\circ}C$		1.0	mA
t _{rr} (100V thru 400V)	$I_F = 0.5A$, $I_R = 1.0A$, Recov. to 0.25A		200	ns
t _{rr} (600V)	$I_F = 0.5A$, $I_R = 1.0A$, Recov. to 0.25A		300	ns
t _{rr} (800V, 1000V)	$I_F = 0.5A$, $I_R = 1.0A$, Recov. to 0.25A		500	ns

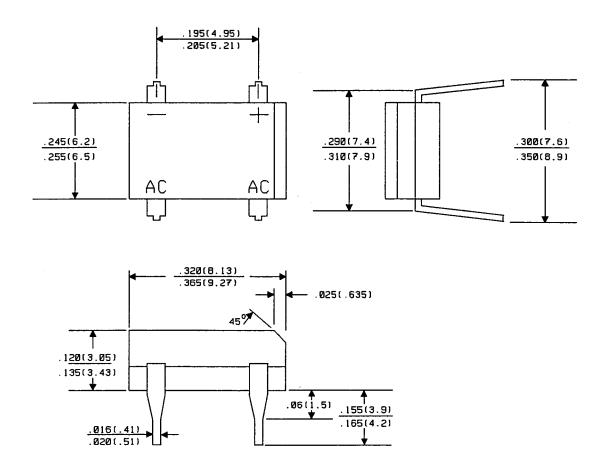

All Dimensions in Inches (mm).

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

www.centralsemi.com (001)



Product End of Life Notification

PDN ID:	PDN01093
Notification Date:	6/06/18
Last Buy Date:	N/A
Last Shipment Date	N/A

Please be advised that Central Semiconductor must immediately discontinue the product(s) listed in the attached PDN notice. We are unable to accept any further orders for these products <u>unless</u> we have available inventory on hand.

You may have purchased one or more of the products listed. Please do not hesitate to contact your local Central Semiconductor sales representative with any questions or needs you may have. Central regrets any inconvenience this may cause.

Sincerely,

Central Semiconductor Corp.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

CCC785 REV 002



Product End of Life Notification

PDN ID:	PDN01093
Notification Date:	6/06/18
Last Buy Date:	N/A
Last Shipment Date	N/A

Summary: All 1.0 Amp Fast Recovery Bridge Rectifiers in the DIP and SMDIP packages are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

Central Part Number	Replacement
CBR1F-D010	N/A
CBR1F-D020	N/A
CBR1F-D020S	N/A
CBR1F-D020S TR13	N/A
CBR1F-D040	N/A
CBR1F-D040S	N/A
CBR1F-D060	N/A
CBR1F-D060S	N/A
CBR1F-D060S TR13	N/A
CBR1F-D080	N/A
CBR1F-D100	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

CCC785 REV 002