
$\backslash$	13	12	11	10		9	8	7	6	5
						1	1	1		
	NUMBER         NUMBER         FINISHED LENG           1200988025         M03S07PP4M010         1M +55.6mm -0 [3.3 F]				2IN -0]					
J	I									
				-			— FINISHED	LENGTH —		
1										1.0" REF [25mm]
Н									NOTE ON = TERMINATED OFF=UNTERMINATED	
G										
F			POLE FACE VIEN	N						
E		12601FREE2FREE	-				MO	3S07 <sub>/</sub> PF	P4M010	
D		3 RED 4 FREE 5 FREE 6 FREE 7 FREE 8 GREE 9 FREE	- - - N -					cable type		-
C		SHELL	. SHIEL					Profibus Ca PUR	able 0101 N	vieter
В	AMPERAGE PROTECTION I OPERA	AMPERAGE RATING 4 PROTECTION FOR D-SUB			VAC/VDC AMPS IP40 CTO 60°C		7 7 2013/09/16	BARDEN BWOODMAN2013/10/31 DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION	GENERAL TOLE (UNLESS SPE mm 4 PLACES ±	CIFIED) INCH ±
				MATERIAL	FI	NISH	RELEASE 32014-057		3 PLACES ± 2 PLACES ±0.13	±.005 ±.010
		G, COPPER STR	-	PUR	PU	RPLE	REL 7G201		1 PLACE ±0.25 ANGULAR	±.020
А	TWISTED PAIR	SHIELD WITH B	KAID	MLYAR	BLACK	YELLOW			DRAFT WH APPLICA	
	D-SUB			ABS	BL	ACK		APF	MUST REN	MAIN
/		12			AU O	VER NI	A			NSIONS

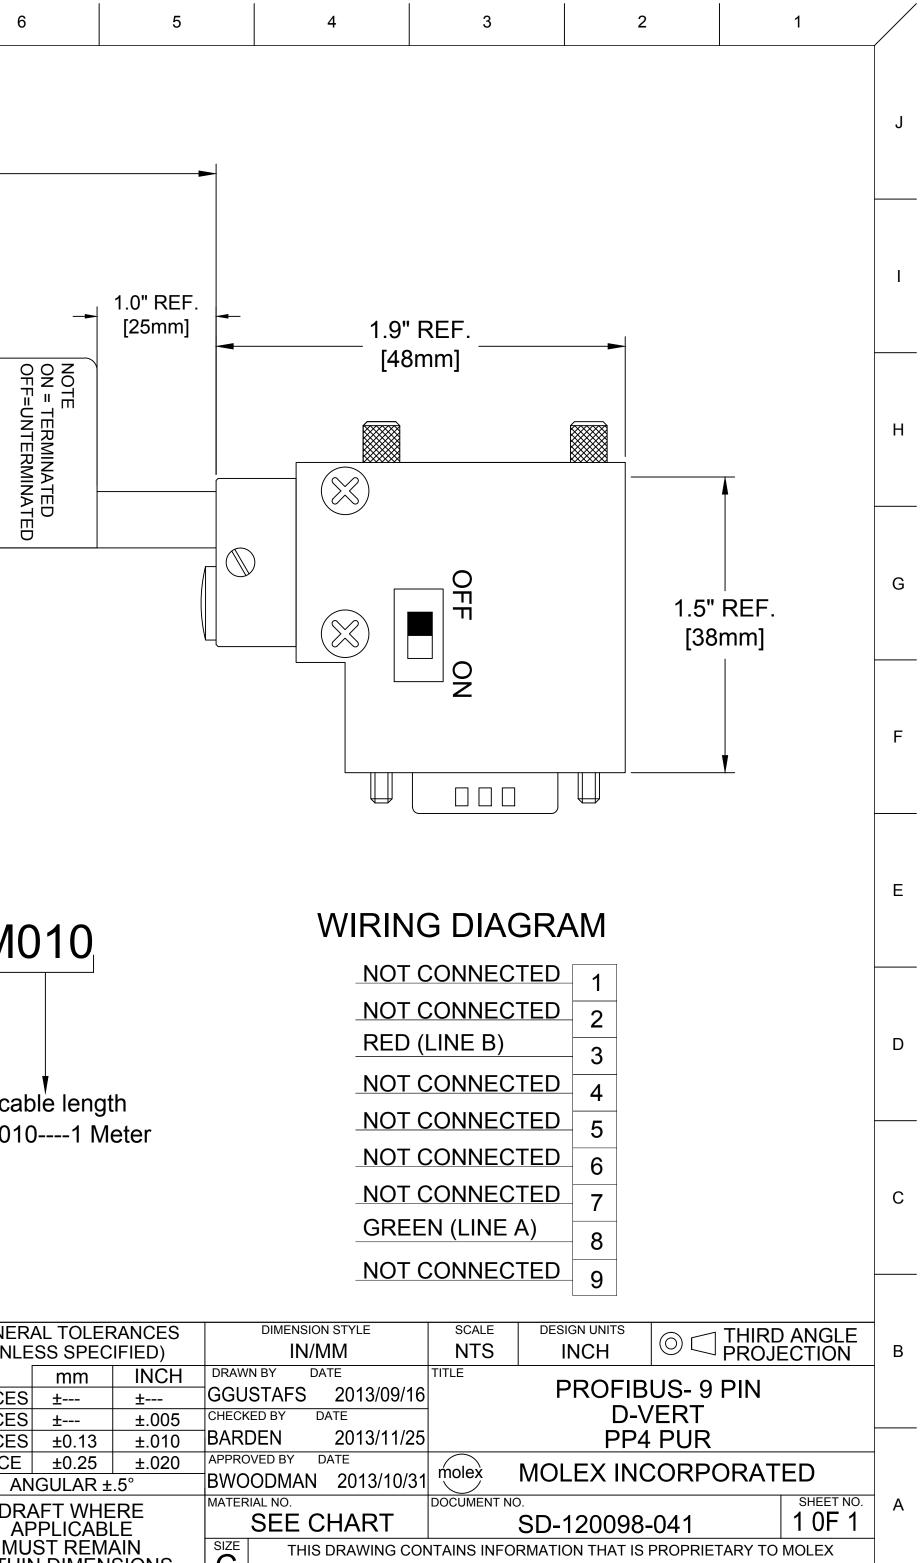

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX

INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SIZE C