


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|---------|-----|--|------|------|-----|
| 6/28/13 | A | RE-DRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| 6/02/17 | B | DIM. 150.0 WAS 152.4 DIM. 5.0 WAS 3.18 ADDED MORE DIM. | T.B. | B.S. | |
| | | | | | |
| | | | | | |

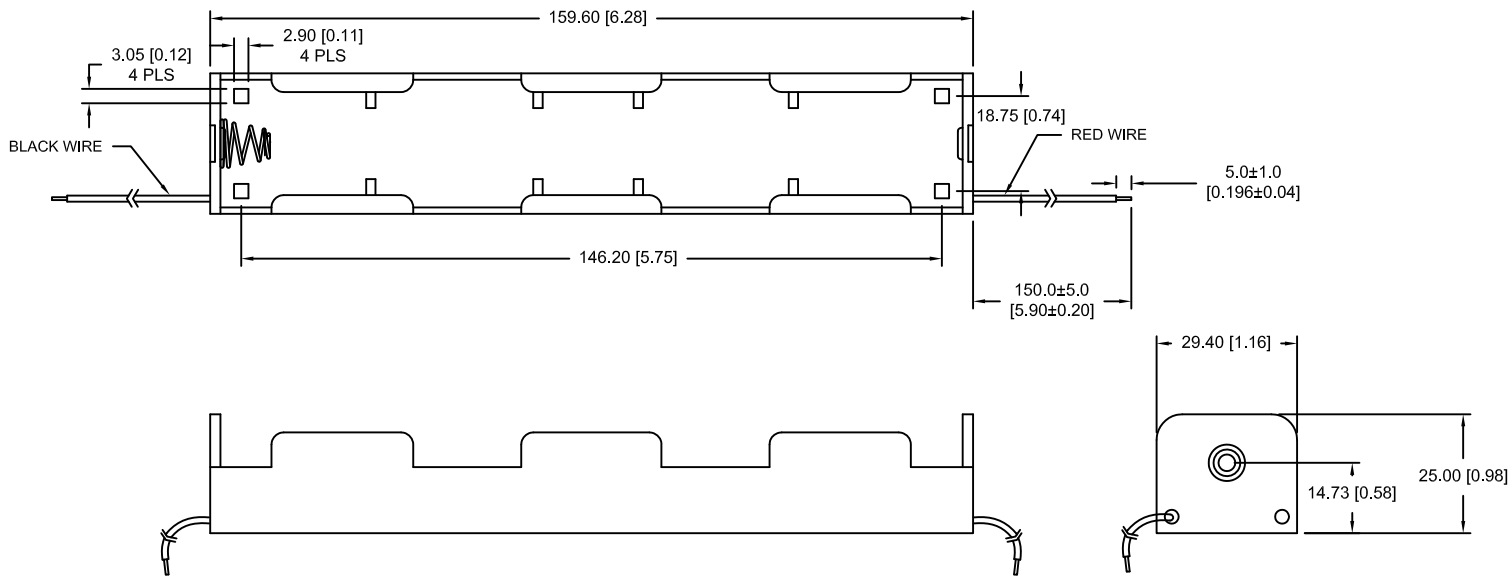


SPECIFICATIONS

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire: 26AWG, UL1007, CSA, TR64, 300V, 80°C
 Rivets - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS 2 COMPLIANT

Mounting Instruction:

Use 2-56 machine screws or eyelets 0.089" OD
 by 0.15" flange stimpson GS-3 series or equivalent.
 also adhesives and double sided tapes work well.

| | | | |
|--------------------------------|---|--------------------------|------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale XX | Drawn By T.S. |
| | | | Approved By T.B. |
| decimal ±.5 (.020) | Title THREE "C" CELL HOLDER WITH WIRE LEADS | | |
| Fractional ± .8 (.030) | Date 6/02/17 | Drawing Number BH13CW | |
| Angular ± 3° | | | |