



卷轮载带包装: 总共 3000PCS/轮

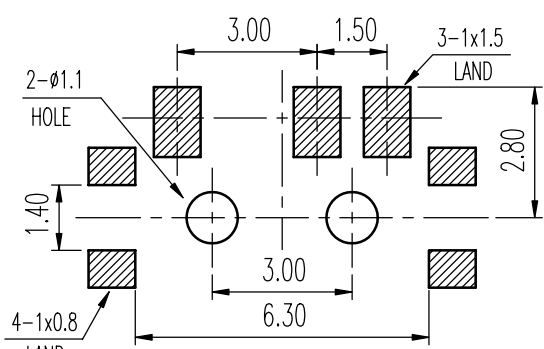

安装孔 PIERCING PLAN

示意图 SCHEMATIC

规格 Specifications

| | |
|-----------------------------------|-------------------------------|
| 额定负荷 Ratings | DC 4 V 0.3 A |
| 初期接触电阻 Initial Contact Resistance | 70 mΩ Max. |
| 绝缘阻抗 Insulation Resistance | DC 500V 60±5 Sec. 100 MΩ Min. |
| 抗电强度 Dielectric Voltage | AC 100 V(50~60HZ) 60 Sec. |

| | |
|-------------------------------|--------------------|
| 操作力 Operating Force (gf) | A → B |
| | B → A 150 ± 100 |
| 负荷寿命 Operating Life With Load | 10,000 次cycles |

| 6 | 弹片 SPRING PLATE | SUS | 1 | NATURAL |
|------|-----------------|-------------|--------|------------|
| 5 | 接触片 CONTACT | C5210R | 1 | Ag CLAD |
| 4 | 端子 TERMINAL | C2680R | 3 | Ag PLATED |
| 3 | 盖片 COVER | SPTe ① | 1 | Ag PLATED |
| 2 | 胶柄 KNOB | LCP | 1 | BLACK C |
| 1 | 胶壳 HOUSING | LCP | 1 | BLACK C |
| 序NO. | 零件 PART | 材料 MATERIAL | 数量 QTY | 备注 REMARKS |

| A03 | 修改内容详见图中标示 ① 所示 | 王小东 | 2007-9-27 |
|--------|-----------------|----------|-----------|
| A02 | 修改内容详见图中标示 ② 所示 | 王小东 | 07-08-08 |
| A01 | | 王小东 | 07-05-10 |
| 标号 REV | 内容 DESCRIPTION | 签名 SIGN. | 日期 DATE |

| | | | | | | | |
|-----------------------------------|--------|----------|------------------------|------------|----------------------|--------|------|
| TOLERANCES UNLESS OTHERWISE SPEC. | | TITLE | SIDE KNOB SLIDE SWITCH | ITEM NO | SK-12C0405-SG 1.5 RT | | |
| UNDER 1 | ± 0.10 | DRAWN | 王小东 | VERSION | A03 | PAGE 1 | OF 1 |
| 1 - 10 | ± 0.30 | REVIEWED | 张念明 | SCALE | | UNIT | mm |
| OVER 10 | ± 0.50 | APPROVED | 程先金 | PROJECTION | | | |

COMAX ELECTRONICS(HUIZHOU) CO.,LTD