



The marking on this product doesn't contain environmental hazardous, materials per directive 2002/95/EC for RoHS compliant.

NOTE:

1. THIS CABLE SHOULD BE PASSED 6G TEST.

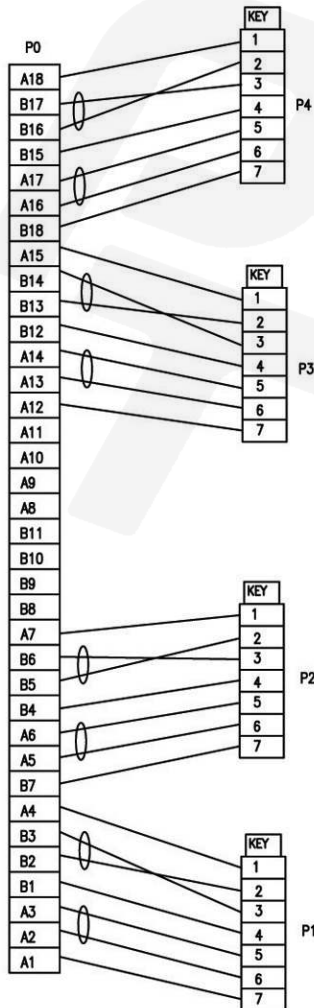

WIRING DIAGRAM

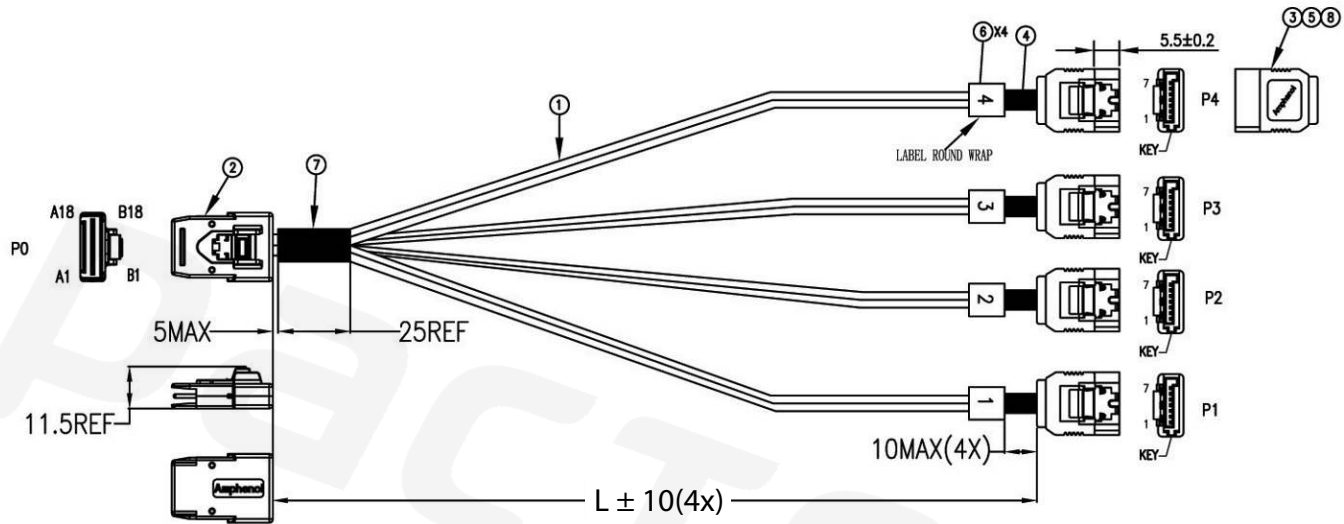

Part Number	Length (mm)
AMPH-874S-025	250±10
AMPH-874S-030	300±10
AMPH-874S-050	500±10
AMPH-874S-075	750±15
AMPH-874S-100	100±20

For Customer Made Items Order:

- * Minimum \$200 value
- * NCNR (Non-cancelable & non-returnable)
- * One time tooling charge, if any, need to be paid in advance with P.O.
- * All drawings of First Articles, if any, must be approved with authorized signature & date.
- * Turn around time counted ARO (After Received FA or drawing approval)

APPROVED BY

COMPANY: _____

PURCHASING/ENGINEER: _____

DATE: _____

ITEM	VENDOR P/N	DESCRIPTION	QTY
8	RMRPE45NT1	PE:LOW DENSITY,CLEAR	A/R
7	RMMTP00012	ACETATE TAPE,W=1INCH,BLACK	A/R
6	RMLSB07301	PPID LABEL, 7*30MM,WHT	4
5	RMRPV45101	OVERMOLD, PVC, BLACK	A/R
4	RMTWA04801	ADHESIVE SHRINK TUB OD4.8MM	A/R
3	10107F01	SATA CONN:7P,F,G/F,W/LATCH,Solder	4
2	ASTB087-0036	MINI SAS 36POS,STR	1
1	202023001	SAS CBL:30AWG*2C+2EAM,0.9*2.3,NATURAL	A/R

www.pactech-inc.com

THIRD ANGLE PROJECTION

UNIT: mm

SHEET 1/1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE:		DATE: 04/01/2011	
0 - 200mm	+/- 10mm	PART NO.: AMPH-874S-XXX	
201 - 1000mm	+/- 20mm	REV. A	
1001 - 1500mm	+/- 25mm	CUSTOMER PART NO.:	
1501 - 2100mm	+/- 30mm	DESCRIPTION: MINI SAS TO SATA*4 WITH LATCH	
2100mm ↑	+/- 40mm		

DRAWN: G. Lei

CHECKED: A. Chui

APPROVED: J. Lai

REVISIONS:

NO.	DESCRIPTION	DATE
1	INITIAL RELEASE	04/01/2011