



SANYO Semiconductors

DATA SHEET

2SA1345/2SC3399

PNP/NPN Epitaxial Planar Silicon Transistors  
**Switching Applications**  
 (with Bias Resistance)

Applications

Switching circuit, inverter, interface circuit, driver

Features

- Built-in bias resistor ( $R_1=47k\Omega$ ,  $R_2=47k\Omega$ ).
- Small-sized package (SPA).

( ): 2SA1345

Absolute Maximum Ratings/ $T_a=25^\circ\text{C}$


			unit
Collector to Base Voltage	$V_{CBO}$	(-150)	V
Collector to Emitter Voltage	$V_{CEO}$	(-150)	V
Emitter to Base Voltage	$V_{EBO}$	(-10)	V
Collector Current	$I_C$	(-100)	mA
Collector Current(Pulse)	$I_{CP}$	(-200)	mA
Collector Dissipation	$P_C$	300	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

Electrical Characteristics/ $T_a=25^\circ\text{C}$


			min	typ	max	unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB}=( - )140\text{V}$ , $I_E=0$			(-0.1)	$\mu\text{A}$
Collector Cutoff Current	$I_{CEO}$	$V_{CE}=( - )40\text{V}$ , $I_B=0$			(-0.5)	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB}=( - )15\text{V}$ , $I_C=0$	(-30)	(-53)	(-80)	$\mu\text{A}$
DC Current Gain	$h_{FE}$	$V_{CE}=( - )15\text{V}$ , $I_C=( - )5\text{mA}$	50			
Gain-bandwidth product	$f_T$	$V_{CE}=( - )10\text{V}$ , $I_C=( - )5\text{mA}$		250 (200)		MHz
Output Capacitance	$c_{ob}$	$V_{CB}=( - )10\text{V}$ , $f=1\text{MHz}$		3.7 (5.5)		pF
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=( - )5\text{mA}$ , $I_B=( - )0.25\text{mA}$	(-0.1)	(-0.3)		V

Continued on next page.

Electrical Connection

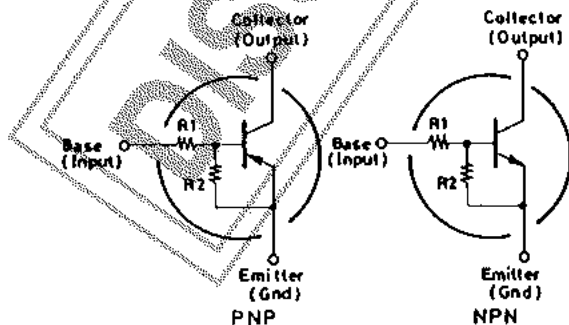

Case Outline 2033  
(unit: mm)

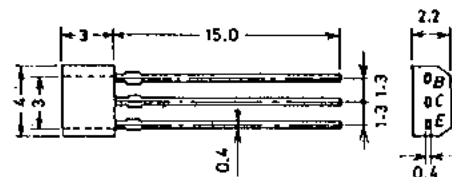

B: Base  
 C: Collector  
 E: Emitter  
 SANYO: SPA

Specifications and information herein are subject to change without notice.

SANYO Electric Co.,Ltd. Semiconductor Company


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

Continued from preceding page.

			min	typ	max	unit
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu A, I_E=0$	(-)50			V
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)100\mu A, R_{BE}=\infty$	(-)50			V
Input Off Voltage	$V_{I(off)}$	$V_{CE}=(-)5V, I_C=(-)100\mu A$	(-)0.8	(-)1.1	(-)1.5	V
Input On Voltage	$V_{I(on)}$	$V_{CE}=(-)0.2V, I_C=(-)5mA$	(-)1.0	(-)2.5	(-)5.0	V
Input Resistance	$R_1$		32	47	62	k $\Omega$
Input Resistance Ratio	$R_1/R_2$		0.9	1.0	1.1	

■ Sample Application Circuit

Input ON-state voltage: 5V or more  
 Input OFF-state voltage: 0.8V or less

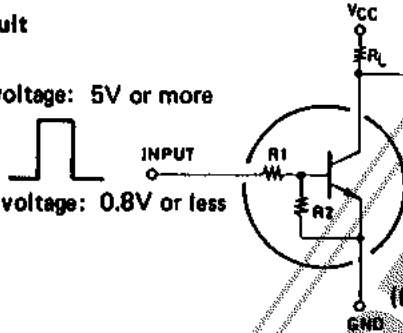

(For PNP, the polarity is reversed.)

