

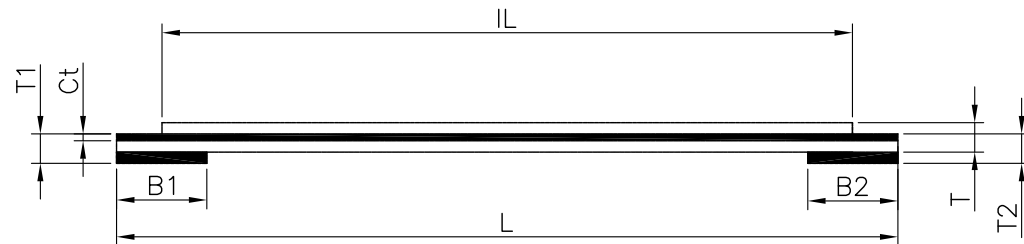


1 2 3 4 5

Item		Specification
No. of conductors	導體芯 N	40P
Pitch	間距 P	0.5±0.05
Total Pitch	總間距 PT	19.5±0.05
Total Length	總長度 L	127±2
Insulation Length	絕緣長度 IL	120±2
Margin Width	邊緣寬度 M	0.5±0.05
Total Width	總寬度 W	20.5±0.05
Strip Length	線口長度 S1	3.5±0.5
Strip Length	線口長度 S2	3.5±0.5
Reinforeing tape length	補強板長度 B1	6±1
Reinforeing tape length	補強板長度 B2	6±1
Slanting	線口傾斜度 A	≤0.3
Over lap	衝孔	/
Terminal thickness	插入厚度 T1/T2	0.32/0.32±0.03
Thickness insulation	線身厚度 T	0.155±0.02
Conductor thickness	導體厚度 Ct	0.035±0.005
Conductor width	導體寬度 Cw	0.3±0.03
Supporting Tape Color	補強板顏色	Blue
PET(Supporting Tape)	補強板規格	0.225
PET(Insulation)	絕緣膠規格	0.06 (Printing HF105°)
PET(Insulation)	絕緣膠規格	0.06 (White HF105°)
Storage Temperature Range	存儲溫度/濕度	10°C~35°C/30~65RH%

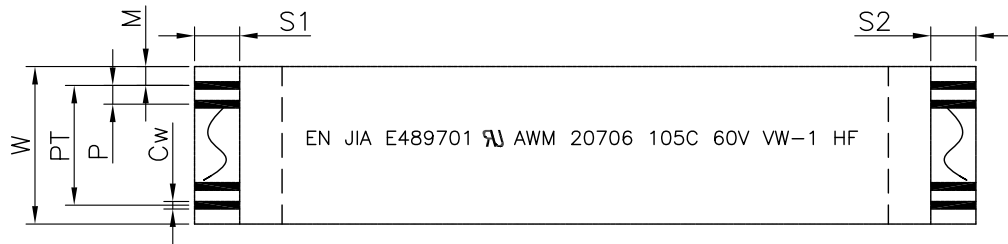

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.30 .XX=±0.20 .XXX=±0.15	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>		
				CHECKED:				UNIT: MM
					SCALE: 1:1	0.5MM 40P L=127MM FLAT FLEXIBLE CABLE		A4
A	07-May-2022			APPROVAL:	SHEET: 1 / 1			
REV	DATE	FILE	BY		PROJECTION:	310-40-0127-A		

A
B
C
D