2103124-1 - ACTIVE

HVA 280

TE Internal #: 2103124-1 PCB Mount Header, Wire-to-Wire, 2 Position, 10.4 mm [.409 in] Centerline, Fully Shrouded, Sealable, Signal, Orange, HVA 280 View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > High-Voltage Header



Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 10.4 mm [.409 in]

Sealable: Yes

Number of Rows: 1

All High-Voltage Header (34)

Features

Product Type Features

 Hybrid Header
 Yes

 Connector Shape
 Rectangular

PCB Connector Assembly Type	PCB Mount Header	
Header Type	Fully Shrouded	
Connector System	Wire-to-Wire	
Sealable	Yes	
Configuration Features		
Number of Sections	1	
Number of Signal Positions	2	
Number of Positions	2	
Number of Rows	1	
Body Features		
Primary Product Color	Orange	
Connector & Keying Code	A	
Contact Features		
Contact Type	Tab	
Mating Tab Width	2.8 mm[.11 in]	

C For support call+1 800 522 6752

PCB Mount Header, Wire-to-Wire, 2 Position, 10.4 mm [.409 in] Centerline, Fully Shrouded, Sealable, Signal, Orange, HVA 280



Mating Tab Thickness	.8 mm[.031 in]	
Mechanical Attachment		
Mounting Holes	Without	
Mating Retention	With	
Mating Alignment	With	
PCB Mount Alignment	Without	
Panel Mount Feature	Without	
PCB Mount Retention	Without	
Mating Retention Type	Locking Interface	
Housing Features		
Centerline (Pitch)	10.4 mm[.409 in]	
Dimensions		
Connector Length	45.4 mm[1.78 in]	
Connector Width	40.6 mm[1.59 in]	
Operation/Application		
Shielded	Yes	
Circuit Application	Signal	

Packaging Features

Packaging Type	Package	
Packaging Quantity	1	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part)	

PCB Mount Header, Wire-to-Wire, 2 Position, 10.4 mm [.409 in] Centerline, Fully Shrouded, Sealable, Signal, Orange, HVA 280



Decamethylcyclopentasiloxane (D5) (.5% in

Component Part)

Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free

Halogen Content


Solder Process Capability


Not applicable for solder process capability


Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

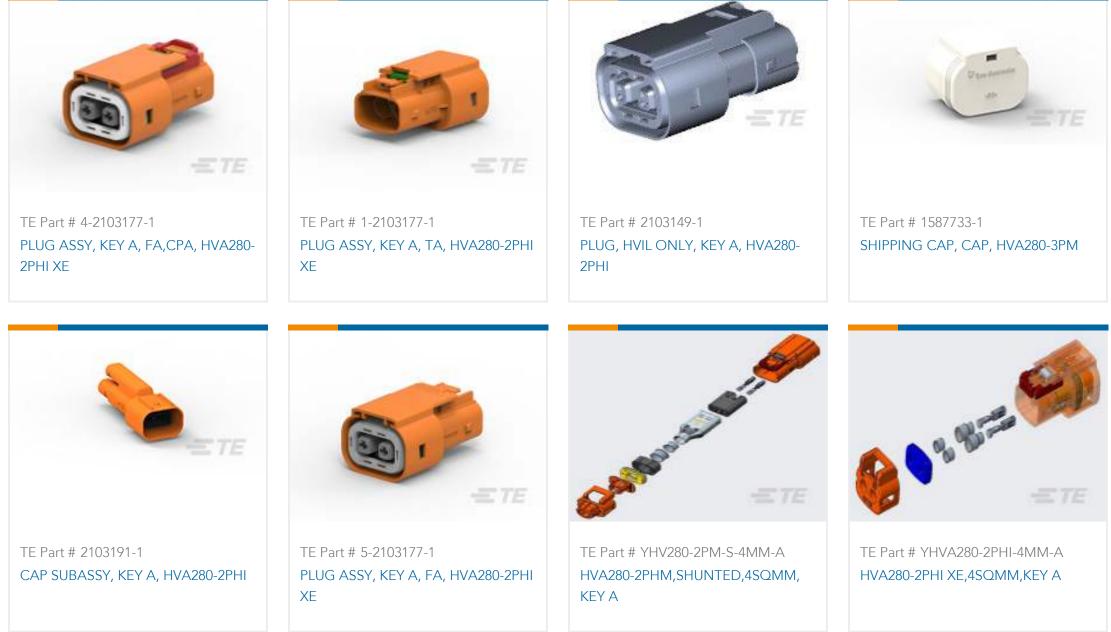

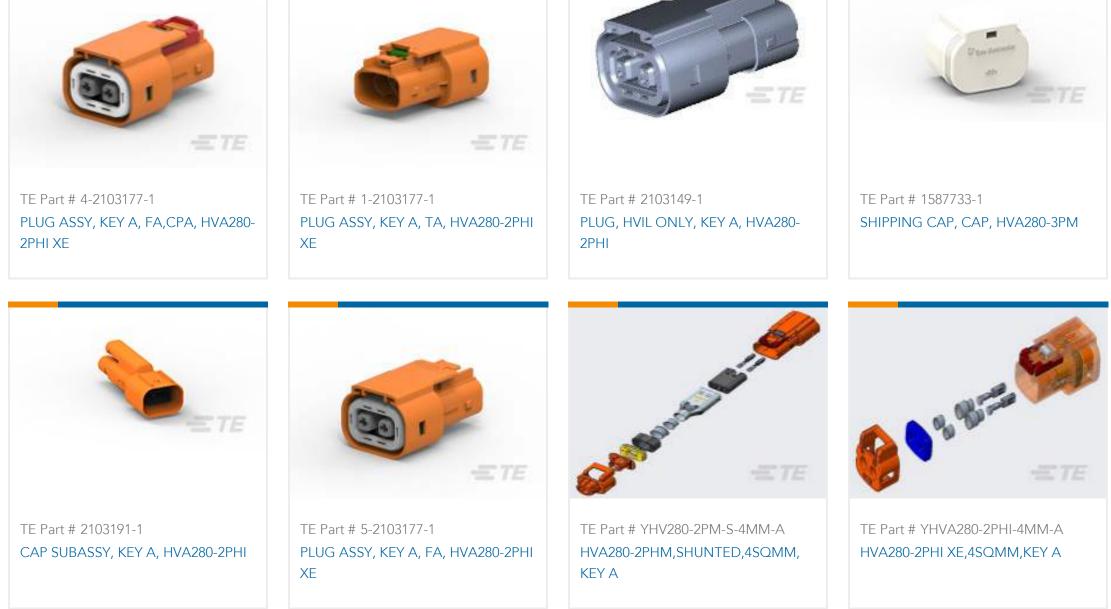

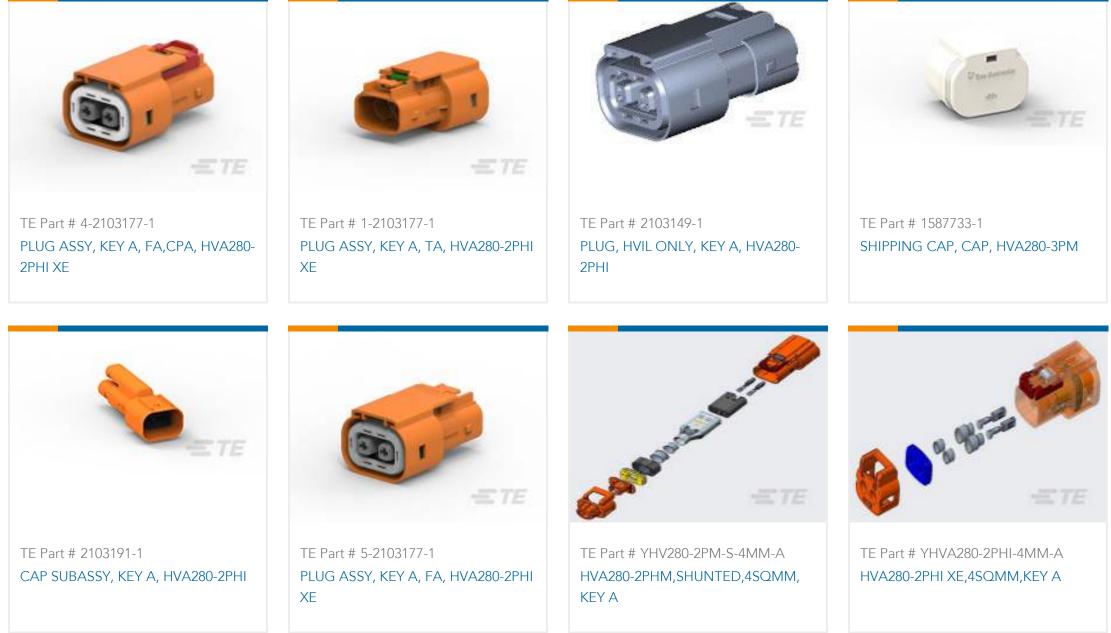


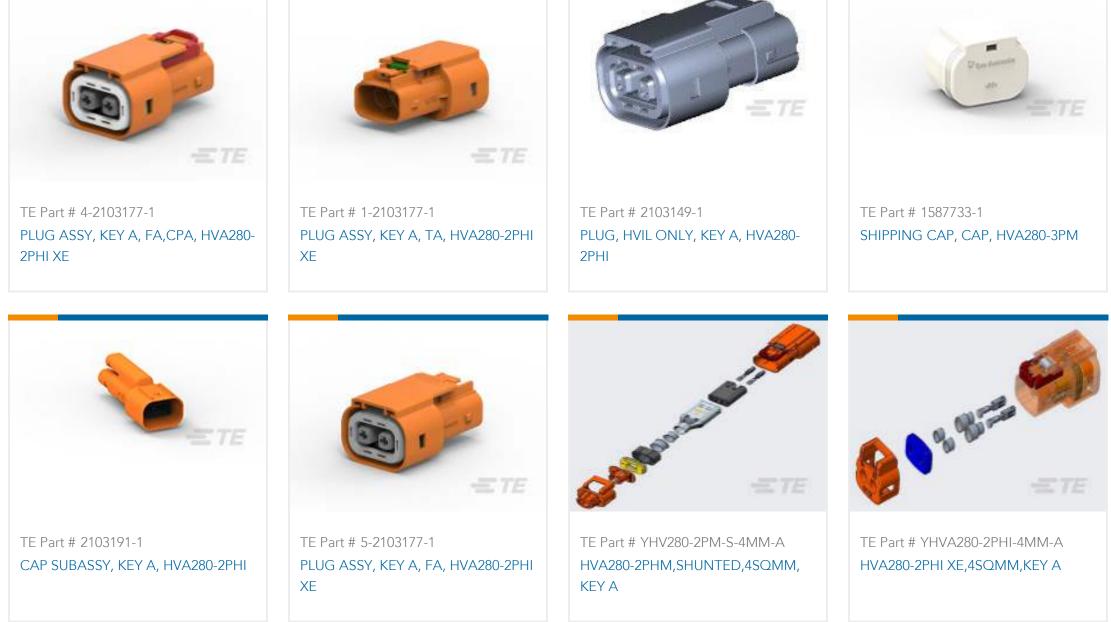

Also in the Series HVA 280

PCB Mount Header, Wire-to-Wire, 2 Position, 10.4 mm [.409 in] Centerline, Fully Shrouded, Sealable, Signal, Orange, HVA 280



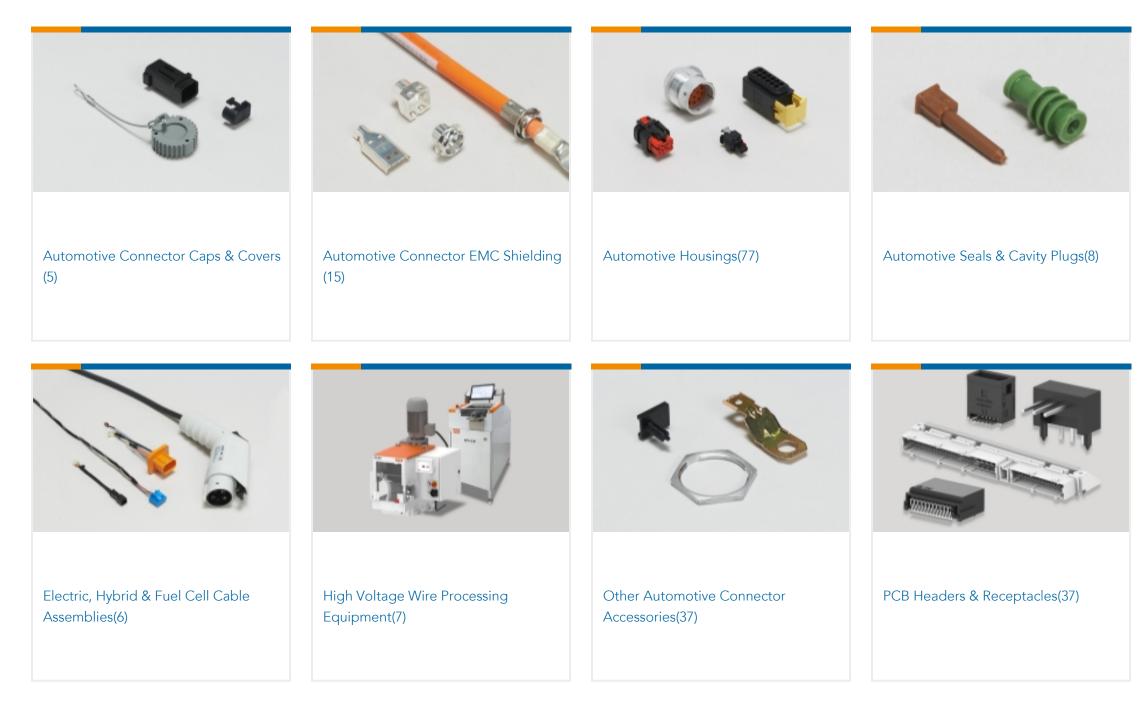

Customers Also Bought



HVA280 2P HEADER ASSY, KEY E	SHEAR HOLDER, FRONT	OCEAN_2.0_APPLICATOR-S- 083F089FA	QSZH-125-NR3-27MM
TE Part #1707747-1 FLOATING SHEAR FRONT	TE Part #1-2141272-6 2POS, MIXED,HEADER ASSY,CODF	TE Part #1722056-3 STRIPPING BLADE, 1PC	TE Part #2077515-1 CAP, RAM

TE Part #8-1372172-1

shear plate

Documents

TE Part #7-1372712-5 CUTTING BLADE

PCB Mount Header, Wire-to-Wire, 2 Position, 10.4 mm [.409 in] Centerline, Fully Shrouded, Sealable, Signal, Orange, HVA 280



Product Drawings HVA280 2P HEADER ASSY, KEY A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2103124-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2103124-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2103124-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.)

English